

Pinout & Configuration

Clock Configuration

Project Manager

Tools

Software Packs

Pinout

Pinout view

System view

Search

Categories A-Z

System Core


Analog

Timers

Connectivity


Computing

Middleware and Software Packs

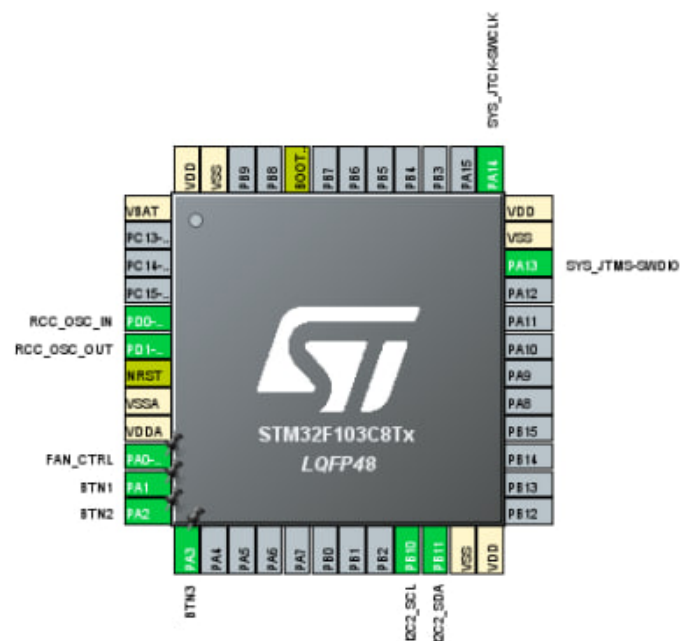

Activate Windows

Go to Settings to activate Windows.

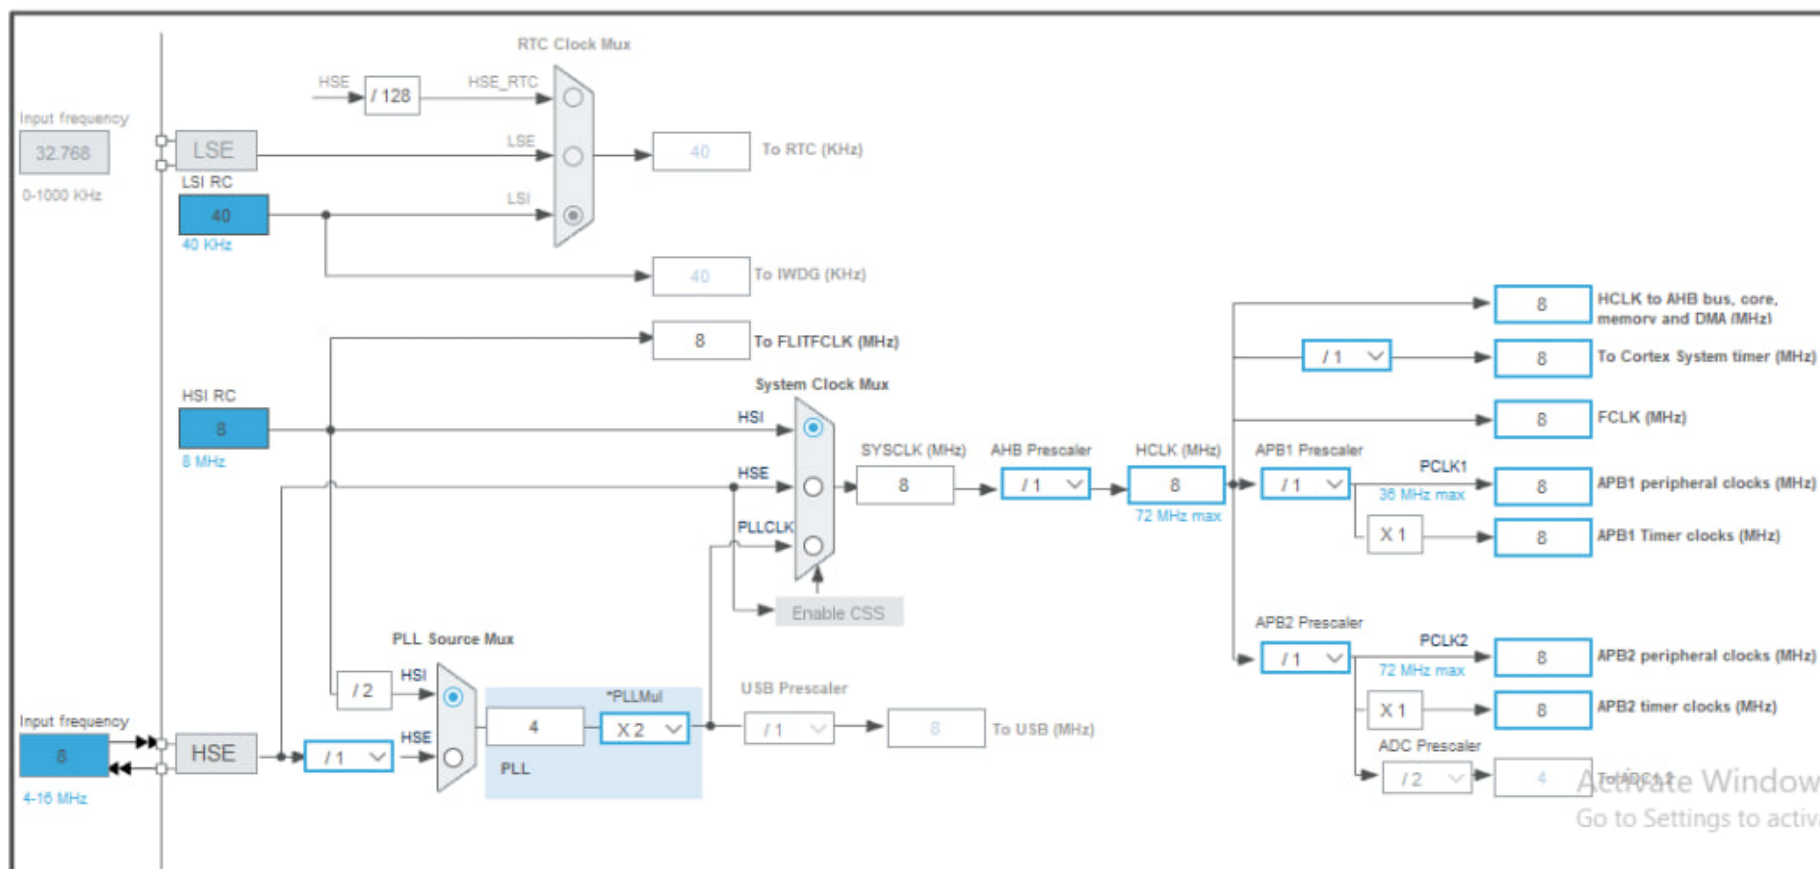

Pinout & Configuration

Clock Configuration

Project Manager

Tools

Project

Project Settings

Project Name

Assignment2

Project Location

C:\Users\hp\Desktop\Lab

Browse

Code Generator

Application Structure

Advanced

☐ Do not generate the main()

Toolchain Folder Location

C:\Users\hp\Desktop\Lab\Assignment2\

Toolchain / IDE

EWARM

Min Version

V8.32

☐ Generate Under Root

Advanced Settings

Linker Settings

Minimum Heap Size

0x200

Minimum Stack Size

0x400

Thread-safe Settings

Cortex-M3NS

☐ Enable multi-threaded support

Thread-safe Locking Strategy

Default - Mapping suitable strategy depending on RTOS selection.

Mcu and Firmware Package

Mcu Reference

STM32F103C8Tx

Firmware Package Name and Version

STM32Cube FW_F1 V1.8.5

☒ Use latest available version☒ Use Default Firmware Location

Firmware Relative Path

C:/Users/hp/STM32Cube/Repository/STM32Cube_FW_F1_V1.8.5

Activate Windows

Go to Settings to activate Windows.

Browse

Pinout & Configuration

Clock Configuration

Project Manager

Tools

Software Packs

Pinout

GPIO Mode and Configuration

Configuration

Group By Peripherals

GPIO

I2C

RCC

SYS

Search Signals

Search (Ctrl+F)


☐ Show only Modified Pins

Pin	Signal	GPIO o...	GPIO ...	GPIO P...	Maximu...	User La...	Modified
PA0-W...	n/a	Low	Output ...	No pull-...	Low	FAN_C...	☒
PA1	n/a	n/a	Input m...	Pull-up	n/a	BTN1	☒
PA2	n/a	n/a	Input m...	Pull-up	n/a	BTN2	☒
PA3	n/a	n/a	Input m...	Pull-up	n/a	BTN3	☒

? Select Pins from table to configure them. **Multiple selection is Allowed.**

Pinout view

System view

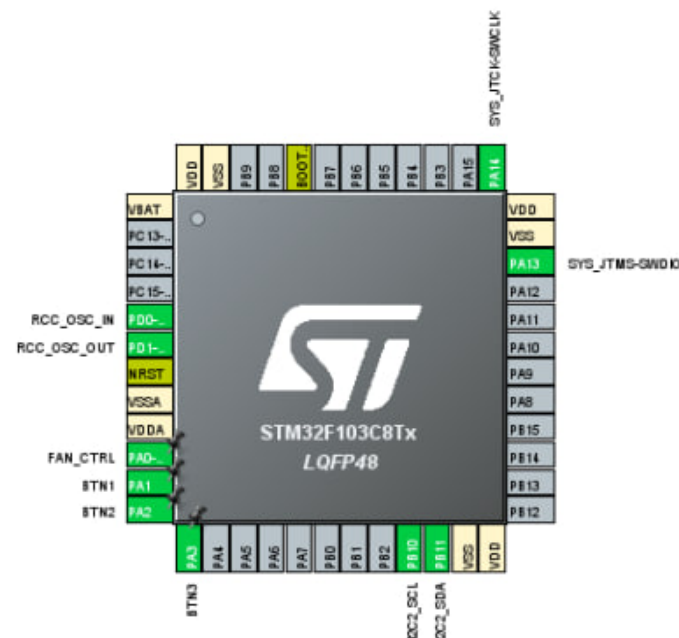

Activate Windows

Go to Settings to activate Windows.

Pinout & Configuration

Clock Configuration

Project Manager

Tools

Software Packs

Pinout

TIM3 Mode and Configuration

Mode

Slave Mode Trigger Source ☒ Internal ClockChannel1 Channel2 Channel3 Channel4 Combined Channels

Configuration

Reset Configuration

☒ NVIC Settings☒ DMA Settings☒ Parameter Settings☒ User Constants

Configure the below parameters :

Search (Ctrl+F)

Counter Settings

Prescaler (P... 7999


Counter Mode Up

Counter Peri... 499

Internal Clock No Division

Pinout view

System view

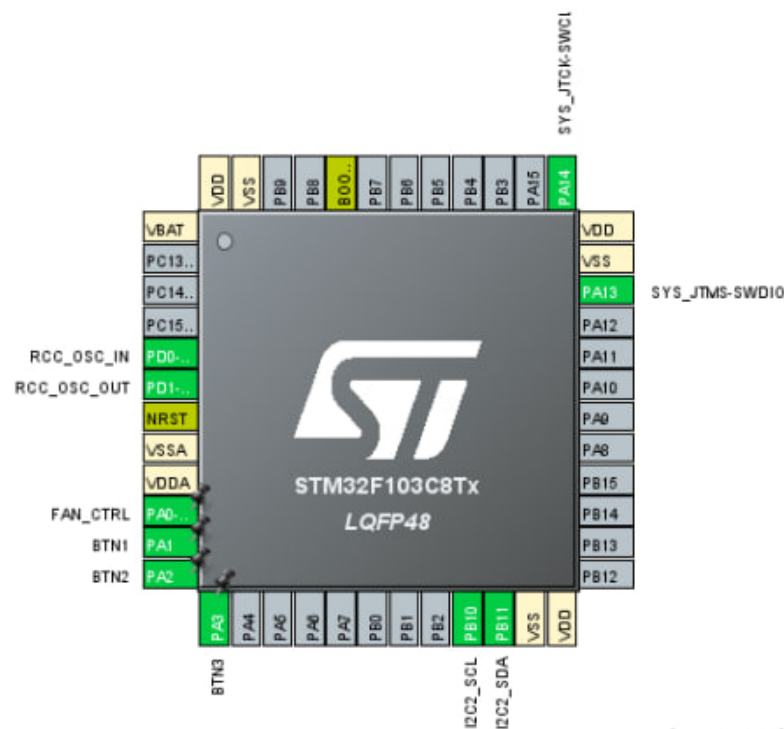

Activate Windows

Go to Settings to activate Windows.

Pinout & Configuration

Clock Configuration

Project Manager

Tools

Software Packs

Pinout

SYS Mode and Configuration

Mode

Debug Serial Wire

☒ System Wake-Up


Timebase Source SysTick

Configuration

Warning: This peripheral has no parameters to be configured.

Pinout view

System view

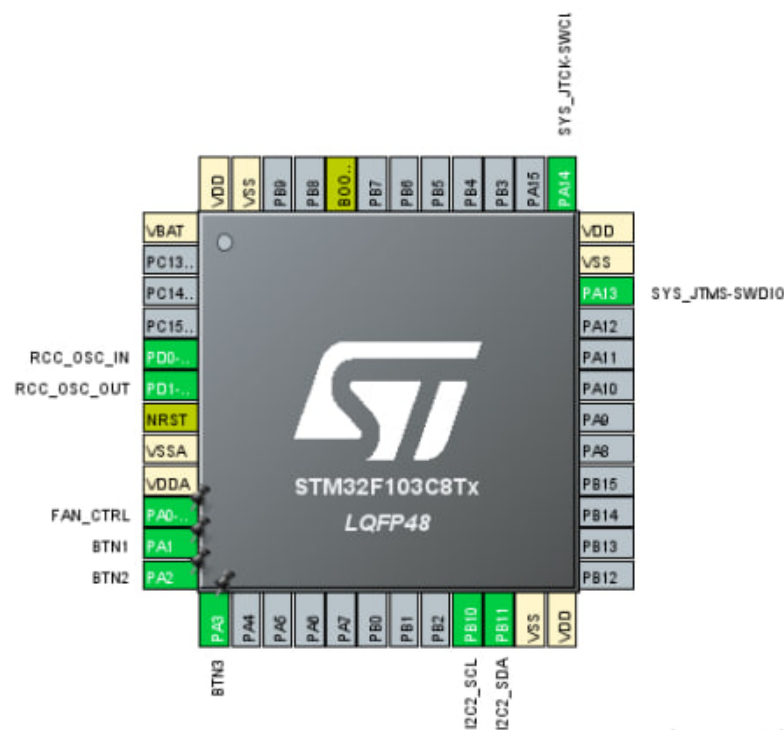

Activate Windows

Go to Settings to activate Windows.

Pinout & Configuration

Clock Configuration

Project Manager

Tools

Software Packs

Pinout

I2C2 Mode and Configuration

Mode

I2C I2C

Configuration

Reset Configuration

GPIO Settings

NVIC Settings

DMA Settings

Parameter Settings

User Constants

Configure the below parameters :

Search (Ctrl+F)

Master Features


I2C Speed ... Standard Mode

I2C Clock S... 100000

Slave Features

Pinout view

System view

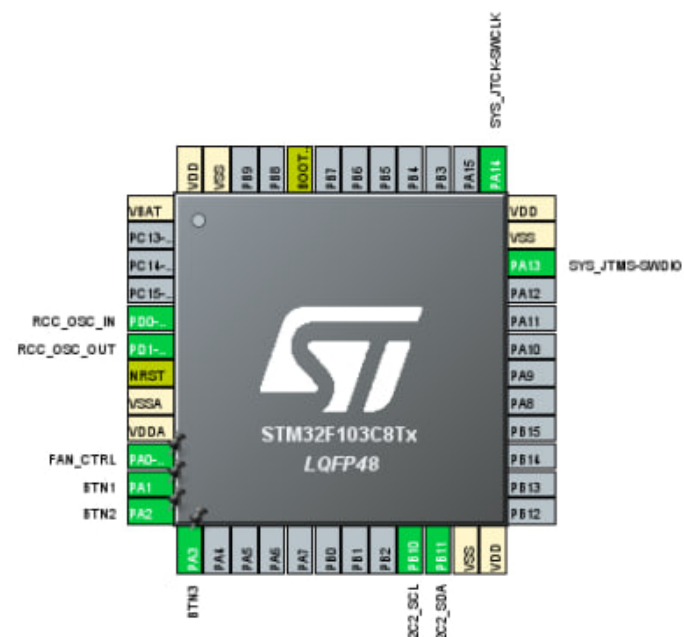

Activate Windows

Go to Settings to activate Windows.