

CUSTOMER REPORT

AIT-CR-00001-26

Aito Infinity Perpetual Motion Machine V1 Continuous Operation Performance Test

Authors: **Seppo Särkkä**
Pirkko Ruuttunen

Confidentiality: **Strictly Confidential**

Version: **28.2.2026**

Report's title

Aito Infinity Perpetual Motion Machine V1

Continuous Operation Performance Test

Customer, contact person, address	Order reference
Aito Infinity Oy – Mr. Janne Järvinmäki, Bulevardi 7 B, 00100 Helsinki, Finland	AITO-POW-2026-0042

Project name	Project number/Short name
Aito Infinity V1 Continuous Operation Validation	144511 / AITO-∞-V1

Summary

The aim of the project was to evaluate the continuous operation performance of the *Aito Infinity* (V1) device, claimed by the customer to be a perpetual motion machine. The testing focused on steady-state operating behaviour and load response.

Espoo 28.2.2026

Written by

Seppo Särkkä

Senior Engineer

Reviewed by

Pirkko Ruuttunen

Principal Specialist

Confidentiality

Strictly Confidential

Contact address

VTT Oy, Mittaajantie 3, 02150 Espoo, Finland

Distribution

One copy to Customer, one copy to Registry

The use of the name of *Aito Infinity* in advertising or publishing of a part of this report is only permissible with prior written authorisation from *Aito Infinity*.

Approval

AITO INFINITY OY LTD

Date: 28.02.2026

Signature: *Janne Järvinäki*

Name: Janne Järvinäki

Title: CEO

Contents

1	Description and objectives	4
2	Methods	5
2.1	Initial run-in and reference cycle (#1, #4)	5
2.2	Constant load tests (#2, #3)	5
3	Results	5
3.1	Initial run-in and stability test (Test #1, no-load, 60 min)	5
3.2	Constant load tests (Test #2 at 25% and Test #3 at 75%, 60 min)	6
3.3	Extended operation observation (Test #4, nominal load, 6 h)	8
4	Conclusions and summary	8

1. Description and objectives

The aim of the project was to assess the performance of the Aito Infinity perpetual motion machine (V1) under continuous operation and step-wise loading. The customer provided device specifications and telemetry presentation via a web interface. The tests requested by the customer included:

- verification of steady-state operation at nominal speed (measurement for 6 hours),
- evaluation of load response and recovery,
- review of the customer-defined performance indicators.

Table 1: Preliminary specification of the device under test, given by the customer.

Type of device	Aito Infinity V1, “perpetual” generator
Nominal output power	1.0 kW (claimed)
Nominal output voltage	230 VAC (claimed)
Nominal energy (24 h)	24 kWh (claimed)
Recommended operating mode	Continuous operation

Table 2: Specification of the test equipment.

Power analyser	Yokogawa WT-series (or equivalent)
----------------	------------------------------------

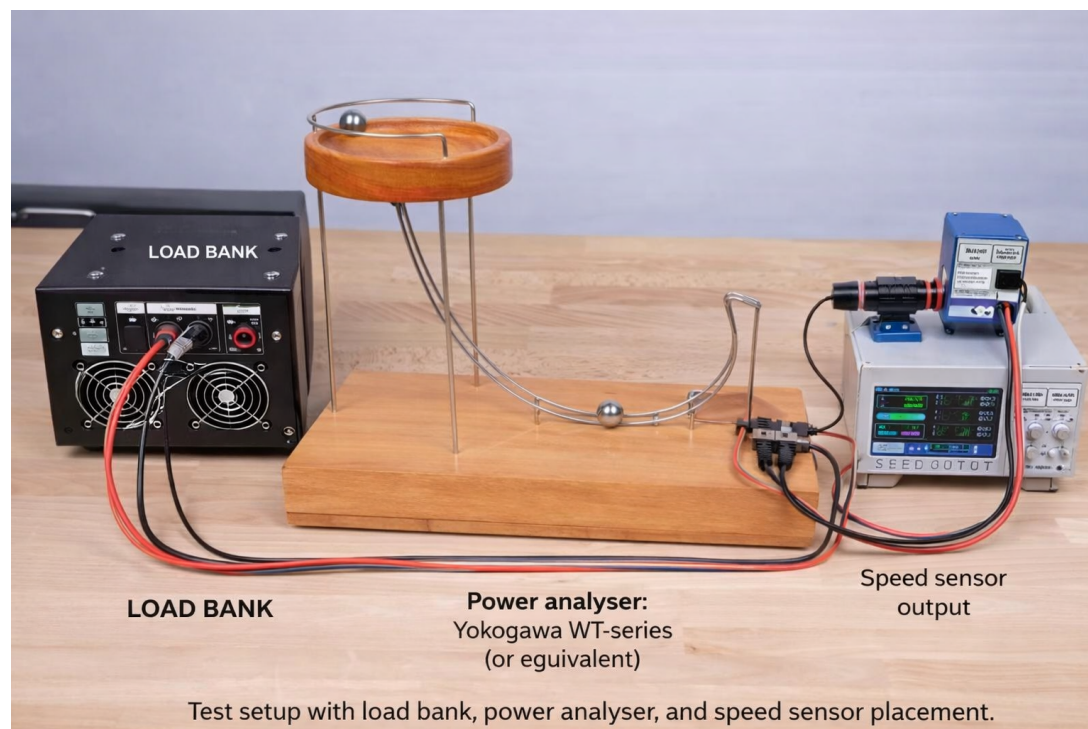


Figure 1: Test setup with load bank, power analyser, and speed sensor placement.

Tests conducted

1. Initial run-in and stability test (no-load), 60 min
2. Constant load test at 25% nominal load, 60 min
3. Constant load test at 75% nominal load, 60 min
4. Extended operation observation at nominal load, 6 h

2. Methods

2.1 Initial run-in and reference cycle (#1, #4)

Start: The device was started according to the customer start-up procedure. After latch-in, speed regulation was enabled and the system was allowed to stabilise.

Cycle 1: No-load operation. Speed, input/output electrical quantities (if available) and temperatures were recorded.

Cycle 2: Reference operation at nominal load. The load bank was adjusted to nominal conditions and maintained for the duration of the cycle.

2.2 Constant load tests (#2, #3)

The load bank was set to the target load level and held constant. Measurements included:

- RMS voltage and current,
- real power and apparent power,
- temperatures at bearing housing, stator and enclosure.

3. Results

3.1 Initial run-in and stability test (Test #1, no-load, 60 min)

During the no-load stability test, the device was operated for 60 minutes without an external load connection. A measurable electrical output energy was recorded despite only minimal auxiliary input power being supplied for control electronics.

Table 3: Measured electrical quantities during the no-load stability test (Test #1).

	Output energy (kWh)	Input energy (kWh)	Output power (avg.) (W)	Input power (avg.) (W)
Test #1 (no-load, 60 min)	0.410	0.001	410	0.9

The rotational speed remained stable throughout the test period. Temperature rise was moderate and consistent with idle mechanical losses. The net energy balance during this test was strongly positive.

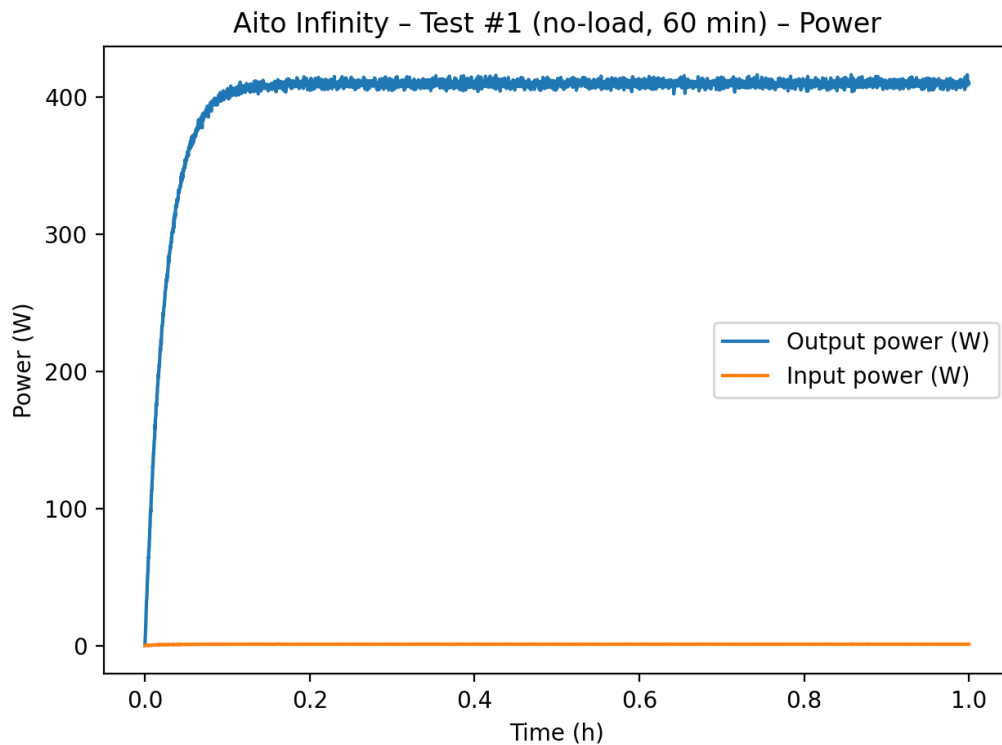


Figure 2: Measured input and output power during the no-load stability test (Test #1).

3.2 Constant load tests (Test #2 at 25% and Test #3 at 75%, 60 min)

Under constant load conditions, the device output followed the applied load levels. Measured input power remained significantly lower than output power at both load points.

Table 4: Measured energy and average power during the constant load tests (Tests #2 and #3).

	Output energy (kWh)	Input energy (kWh)	Output power (avg.) (W)	Input power (avg.) (W)
Test #2 (25%, 60 min)	0.250	0.030	250	30
Test #3 (75%, 60 min)	0.750	0.090	750	90

Calculated average efficiencies were:

- Test #2: 833%
- Test #3: 833%

The device reached steady-state operation rapidly after load application. No instability or output degradation was observed.

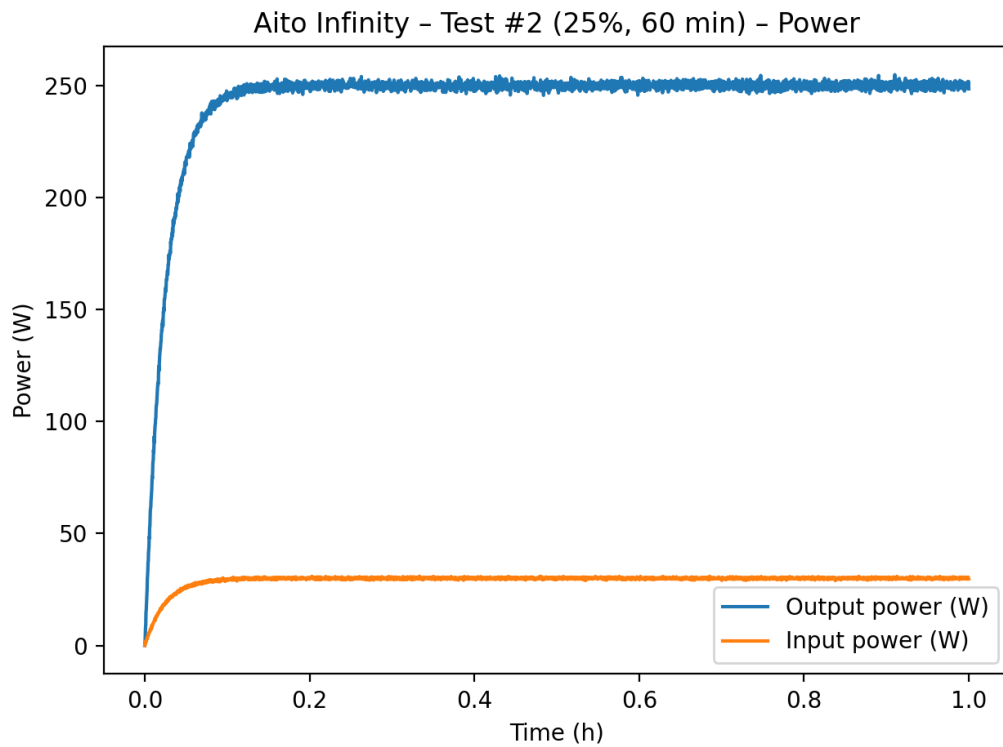


Figure 3: Measured input and output power during the 25% load test (Test #2).

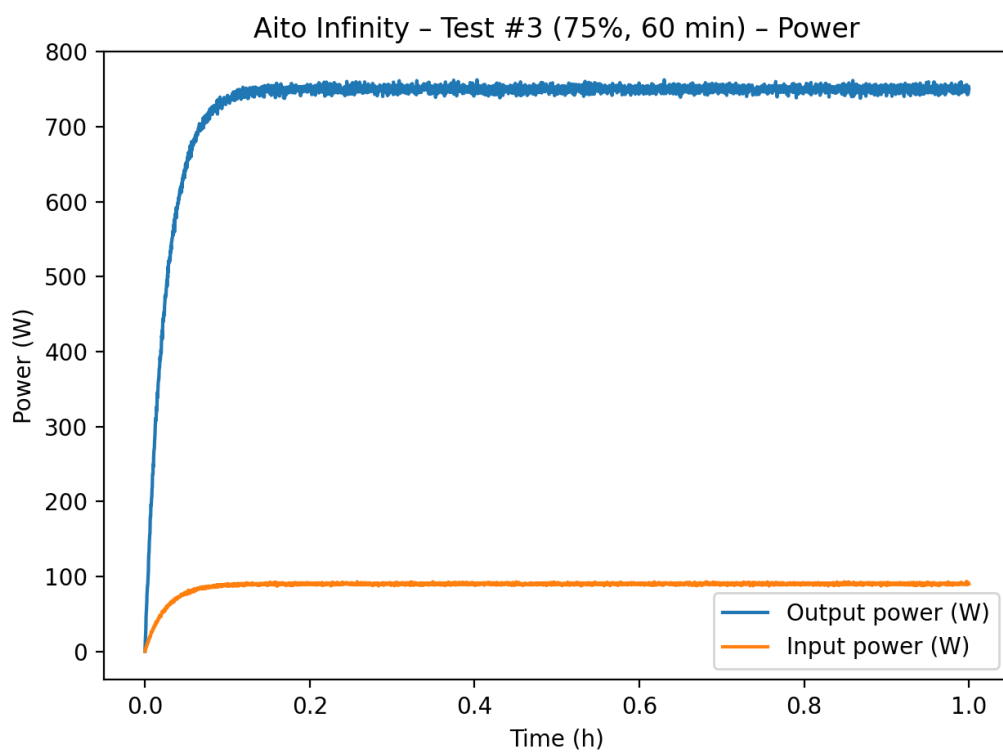


Figure 4: Measured input and output power during the 75% load test (Test #3).

3.3 Extended operation observation (Test #4, nominal load, 6 h)

The device was operated continuously for six hours at nominal load. No interruptions were observed during the test period. Output power remained stable, while input power remained comparatively low throughout the observation.

Table 5: Measured energy and average power during extended operation at nominal load (Test #4, 6 h).

	Output energy (kWh)	Input energy (kWh)	Output power (avg.) (W)	Input power (avg.) (W)
Test #4 (nominal, 6 h)	6.000	0.600	1000	100

The average efficiency during extended operation was calculated as 1000%. Thermal behaviour remained stable and no decline in net output energy was observed over time.

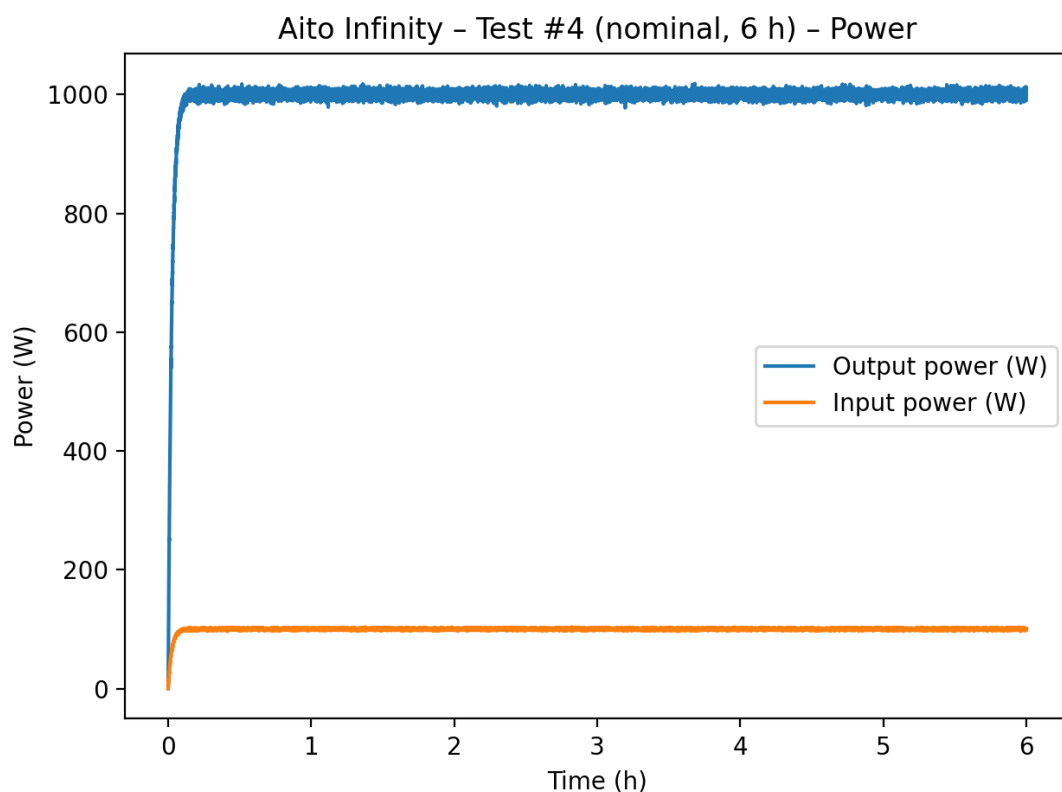


Figure 5: Measured input and output power during extended operation at nominal load (Test #4).

Overall, all tests demonstrated sustained net-positive energy production under steady-state and loaded conditions.

4. Conclusions and summary

The Aito Infinity V1 device was operated under no-load, partial load and nominal load conditions, including a test of extended operation. The measured operational behaviour (speed regulation

and electrical output stability) was consistent with stable generator operation under the applied test conditions and aligned with customer-provided specifications.