


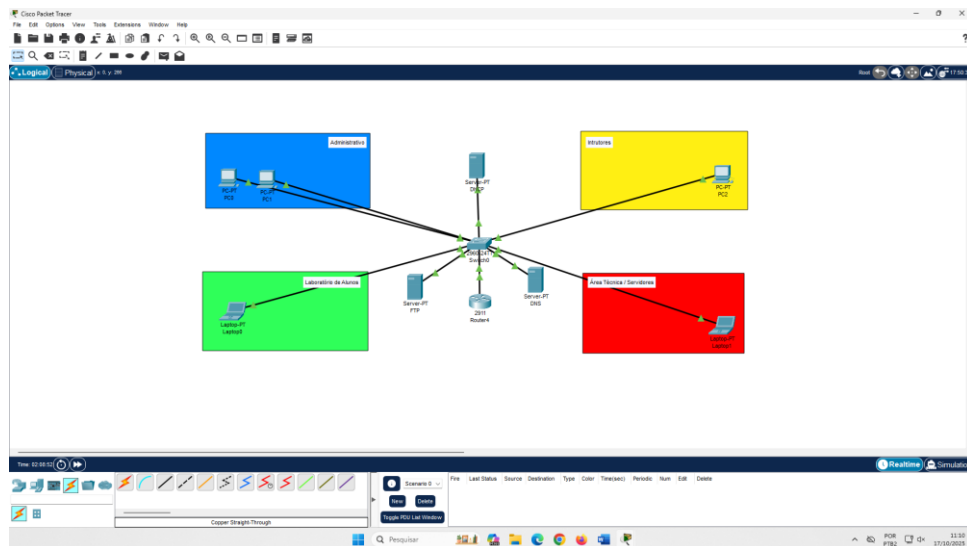

Roteador e SSH:

Router2

Physical Config CLI Attributes

IOS Command Line Interface

```
Router>enable
Router#configure terminal
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#hostname SENAI TechLab
Router(config)#^
% Invalid input detected at '^' marker.

Router(config)#hos
% Incomplete command.
Router(config)#hostname SENAITechLab
SENAITechLab(config)#line console 0
SENAITechLab(config-line)#password senaitl
SENAITechLab(config-line)#login
SENAITechLab(config-line)#exec-timeout 2 0
SENAITechLab(config-line)#exit
SENAITechLab(config)#interface gigabitEthernet 0/0
SENAITechLab(config-if)#ip address 192.168.50.1 255.255.255.0
SENAITechLab(config-if)#description SENAI TechLab
SENAITechLab(config-if)#no shutdown

SENAITechLab(config-if)#
%LINK-5-CHANGED: Interface GigabitEthernet0/0, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface GigabitEthernet0/0, changed state to up

SENAITechLab(config-if)#exit
SENAITechLab(config)#exit
SENAITechLab#
%SYS-5-CONFIG_I: Configured from console by console

SENAITechLab#copy running-config startup-config
Destination filename [startup-config]?
Building configuration...
[OK]
SENAITechLab#
```

Copy Paste

☐ Top

Router2

Physical

Config

CLI

Attributes

IOS Command Line Interface

```
SENAITechLab>configure terminal
^
% Invalid input detected at '^' marker.

SENAITechLab>enable
SENAITechLab#configure terminal
Enter configuration commands, one per line. End with CNTL/Z.
SENAITechLab(config)#ip domain-name senai.local
SENAITechLab(config)#crypto key generate rsa
The name for the keys will be: SENAITechLab.senai.local
Choose the size of the key modulus in the range of 360 to 4096 for your
  General Purpose Keys. Choosing a key modulus greater than 512 may take
  a few minutes.

How many bits in the modulus [512]: 1024
% Generating 1024 bit RSA keys, keys will be non-exportable...[OK]

SENAITechLab(config)#line vty 0 4
*Mar 1 0:51:17.8: %SSH-5-ENABLED: SSH 1.99 has been enabled
SENAITechLab(config-line)#transport input ssh
SENAITechLab(config-line)#login local
SENAITechLab(config-line)#exit
SENAITechLab(config)#enable secret senait1
SENAITechLab(config)#ip ssh version 2
SENAITechLab(config)#no shutdown
^
% Invalid input detected at '^' marker.

SENAITechLab(config)#ip address 192.168.50.1 255.255.255.0
^
% Invalid input detected at '^' marker.

SENAITechLab(config)#interface gigabitethernet 0/0
SENAITechLab(config-if)#192.168.50.1 255.255.255.0
^
% Invalid input detected at '^' marker.
```

Copy

Paste

☐ Top

IOS Command Line Interface

* Generating 1024 bit RSA keys, keys will be non-exportable...[OK]

```
SENAITechLab(config)#line vty 0 4
*Mar 1 0:51:17.8: %SSH-5-ENABLED: SSH 1.99 has been enabled
SENAITechLab(config-line)#transport input ssh
SENAITechLab(config-line)#login local
SENAITechLab(config-line)#exit
SENAITechLab(config)#enable secret senait1
SENAITechLab(config)#ip ssh version 2
SENAITechLab(config)#no shutdown
^
% Invalid input detected at '^' marker.

SENAITechLab(config)#ip address 192.168.50.1 255.255.255.0
^
% Invalid input detected at '^' marker.

SENAITechLab(config)#interface gigabitethernet 0/0
SENAITechLab(config-if)#192.168.50.1 255.255.255.0
^
% Invalid input detected at '^' marker.


SENAITechLab(config-if)#ip address 192.168.50.1 255.255.255.0
^
% Invalid input detected at '^' marker.

SENAITechLab(config-if)#ip address 192.168.50.1 255.255.255.0
SENAITechLab(config-if)#no shutdown
SENAITechLab(config-if)#exit
SENAITechLab(config)#end
SENAITechLab#
%SYS-5-CONFIG_I: Configured from console by console

SENAITechLab#write memory
Building configuration...
[OK]
SENAITechLab#
```

Copy

Paste

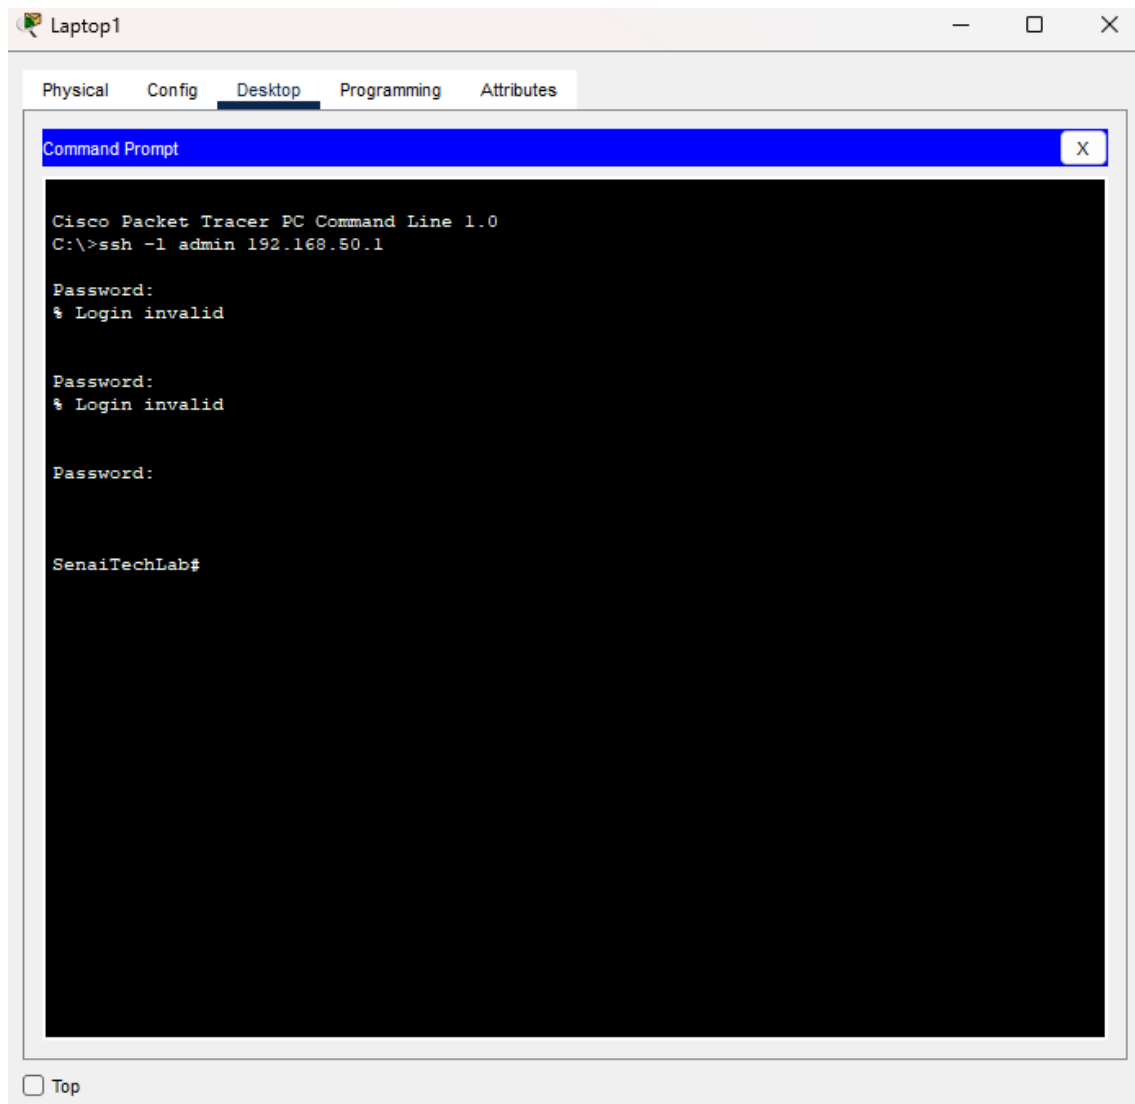

DHCP:

DHCP

Physical

Config

Services

Desktop

Programming

Attributes

SERVICES

HTTP

DHCP

DHCPv6

TFTP

DNS

SYSLOG

AAA

NTP

EMAIL

FTP

IoT

VM Management

Radius EAP

DHCP

Interface

FastEthernet0

Service

On

Off

Pool Name

serverPool

Default Gateway

192.168.50.1

DNS Server

192.168.50.2

Start IP Address :

192

168

50

10

Subnet Mask:

255

255

255

0

Maximum Number of Users :

140

TFTP Server:

0.0.0.0

WLC Address:

0.0.0.0

Add

Save

Remove

Pool Name	Default Gateway	DNS Server	Start IP Address	Subnet Mask	Max User	TFTP Server	WLC Address
serverPool	192.168....	192.168....	192.168....	255.255....	140	0.0.0.0	0.0.0.0
DHCP	192.168....	192.168....	192.168....	255.255....	140	0.0.0.0	0.0.0.0

Top

DHCP

Physical

Config

Services

Desktop

Programming

Attributes

IP Configuration

IP Configuration

DHCP

Static

IPv4 Address

192.168.50.3

Subnet Mask

255.255.255.0

Default Gateway

192.168.50.1

DNS Server

192.168.50.2

IPv6 Configuration

Automatic

Static

IPv6 Address

/

Link LocalAddress

FE80::202:17FF:FE57:C582

Default Gateway

DNS Server

802.1X

Use 802.1X Security

Authentication

MD5

Username

Password

Top

FTP:

FTP

Physical

Config

Services

Desktop

Programming

Attributes

GLOBAL

Settings

Algorithm Settings

INTERFACE

FastEthernet0

Global Settings

Display Name

Gateway/DNS IPv4

☐ DHCP

☒ Static

Default Gateway

DNS Server

Gateway/DNS IPv6


☐ Automatic

☒ Static


Default Gateway

DNS Server

☐ Top

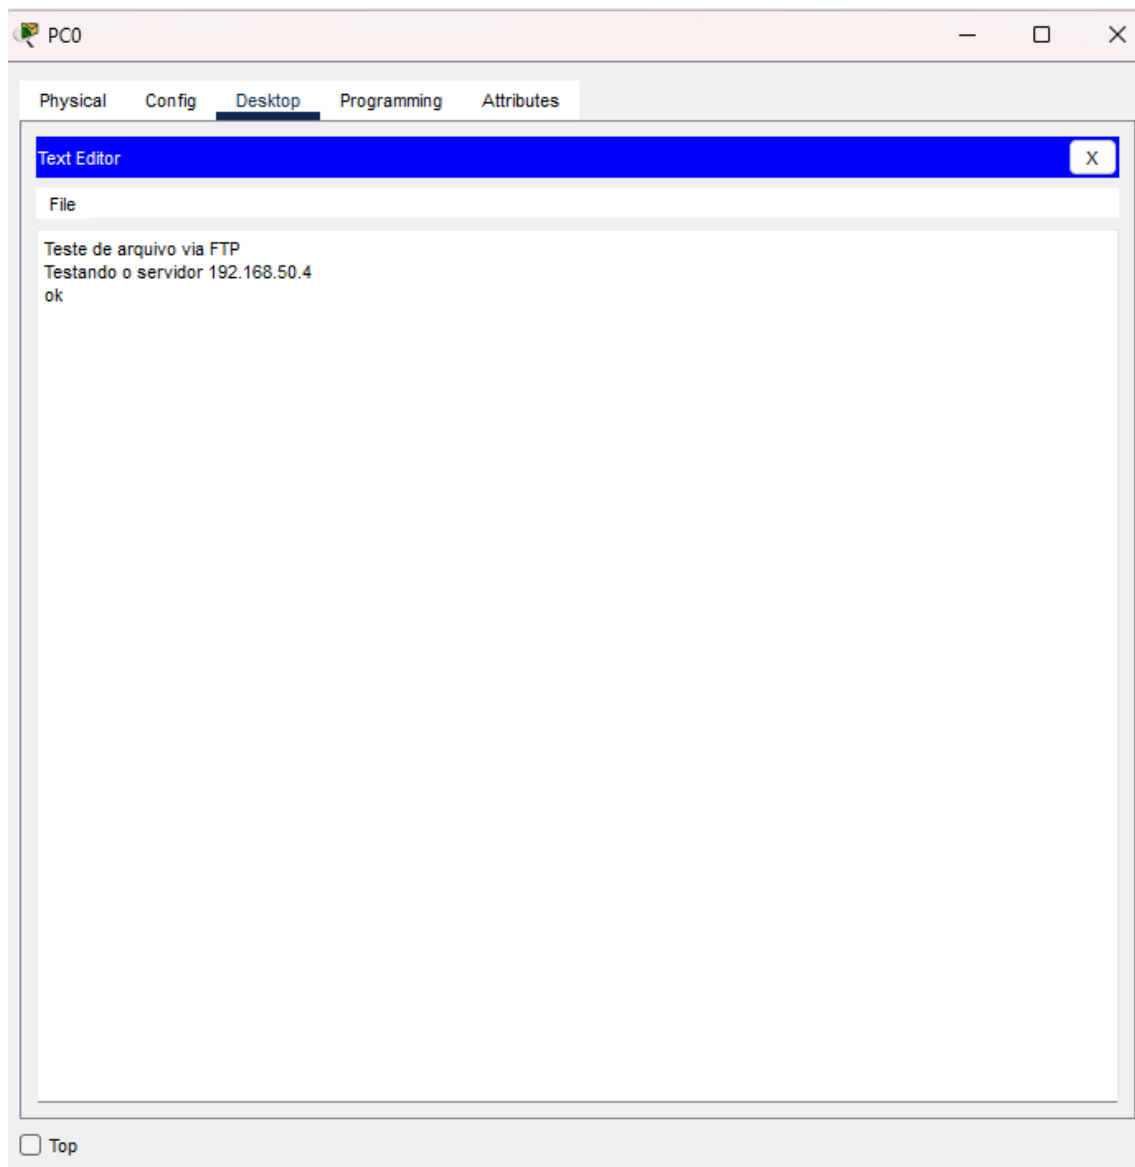

SSH:

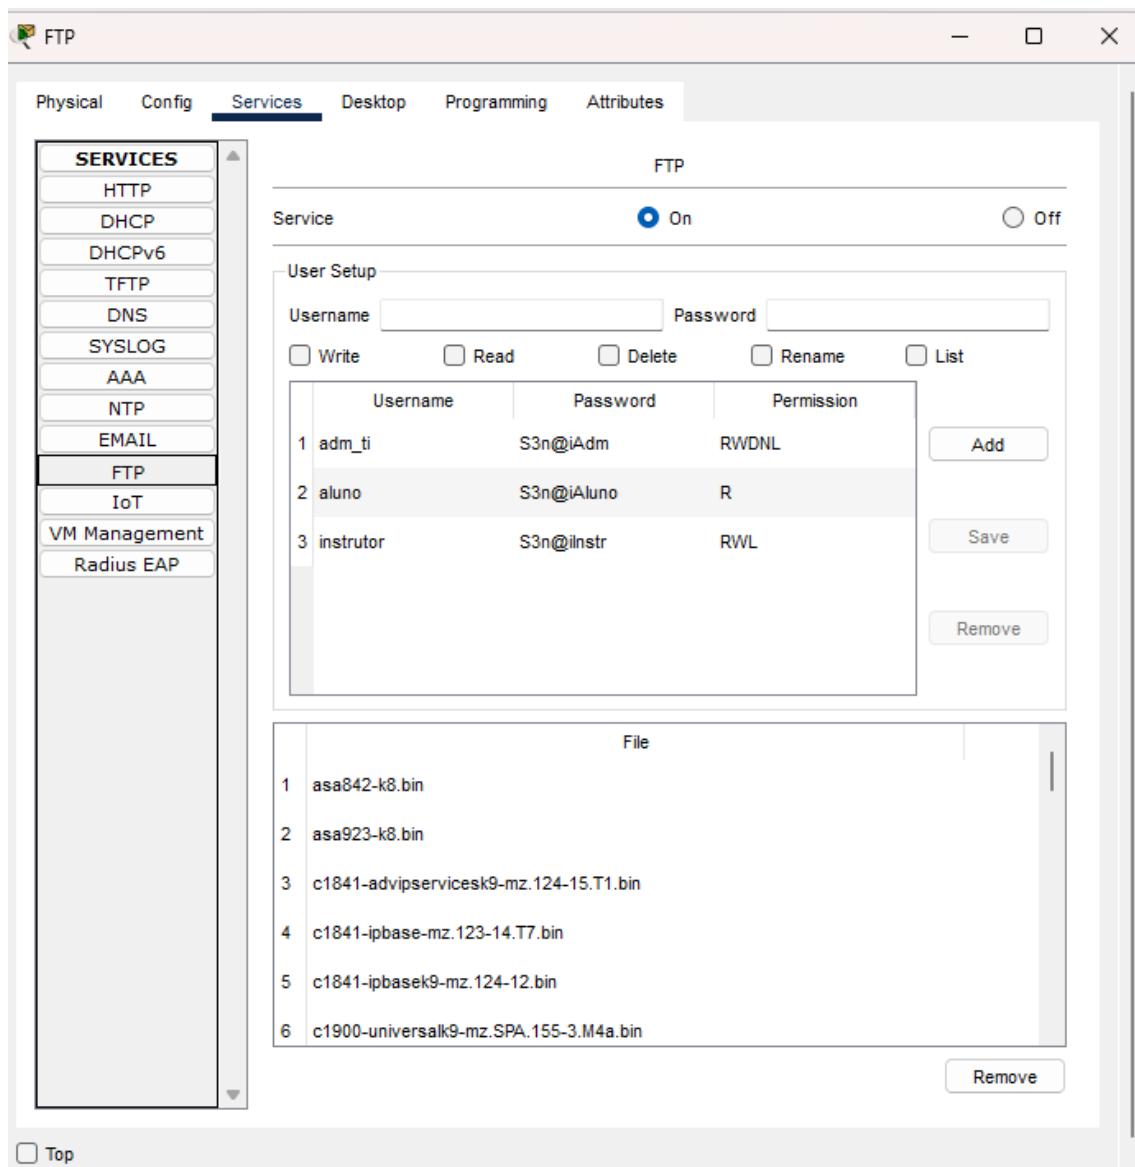

DNS:

DNS

Physical

Config

Services

Desktop

Programming

Attributes

GLOBAL

Settings

Algorithm Settings

INTERFACE

FastEthernet0

Global Settings

Display NameDNS

Gateway/DNS IPv4

DHCP

Static

Default Gateway192.168.50.1

DNS Server192.168.50.2

Gateway/DNS IPv6

Automatic

Static

Default Gateway

DNS Server

Top

DNS

Physical

Config

Services

Desktop

Programming

Attributes

SERVICES

HTTP

DHCP

DHCPv6

TFTP

DNS

SYSLOG

AAA

NTP

EMAIL

FTP

IoT

VM Management

Radius EAP

DNS

DNS Service

On

Off

Resource Records

Name

www.senai.local

Type

A Record

Address

192.168.50.2

Add

Save

Remove

No.	Name	Type	Detail
0	www.senai.local	A Record	192.168.50.2

DNS Cache

DNS

Physical

Config

Services

Desktop

Programming

Attributes

SERVICES

HTTP

DHCP

DHCPv6

TFTP

DNS

SYSLOG

AAA

NTP

EMAIL

FTP

IoT

VM Management

Radius EAP

File Name: index.html

```
<!DOCTYPE html>
<html lang="pt-BR">
<head>
  <meta charset="UTF-8">
  <meta name="viewport" content="width=device-width, initial-scale=1.0">
  <title>SENAI Roberto Simonsen | Cursos Técnicos e Profissionalizantes</title>
  <link rel="stylesheet" href="https://cdn.jsdelivr.net/npm/font-awesome@6.4.0/css/all.min.css">
  <style>
    :root {
      --senai-blue: #eb0c2a;
      --senai-dark-blue: #c0040d;
      --senai-orange: #ff092a;
      --senai-light-gray: #f5f5f5;
      --senai-dark-gray: #333333;
    }

    * {
      margin: 0;
      padding: 0;
      box-sizing: border-box;
      font-family: 'Segoe UI, Tahoma, Geneva, Verdana, sans-serif;
    }

    body {
      background-color: #f9f9f9;
      color: var(--senai-dark-gray);
      line-height: 1.6;
    }

    /* Header Styles */
    .top-bar {
      background-color: var(--senai-dark-blue);
      color: white;
      padding: 8px 0;
      font-size: 0.9rem;
    }
```

File Manager

Save

☐ Top

