

Customer Information Sheet

DRAWING No.: S1751-XX

SHEET 2 OF 2




IF IN DOUBT - ASK

(C)

NOT TO SCALE



THIRD ANGLE PROJECTION

ALL DIMENSIONS IN mm

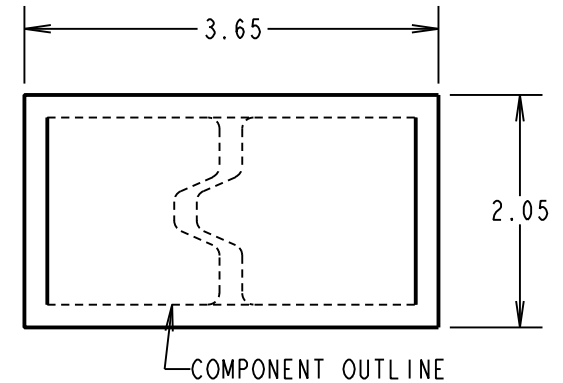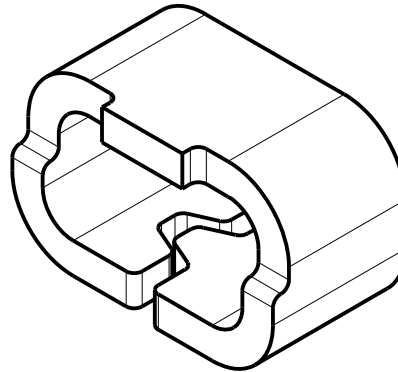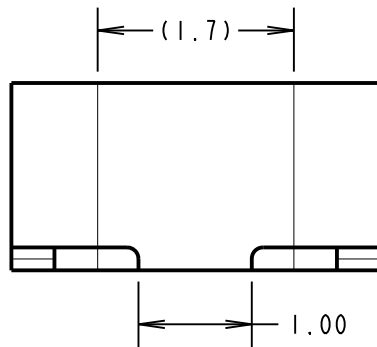

RECOMMENDED PAD LAYOUT

ORDER CODE	FINISH
S1751-06	TIN/LEAD
S1751-46	100% TIN

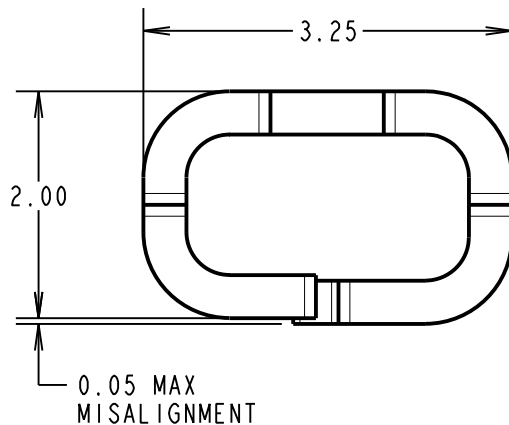

SPECIFICATIONS:

MATERIAL = BRASS CuZn30 1/2 HARD

FINISH:

06 = 4μ 90/10 TIN/LEAD

46 = 4μ 100% TIN

ELECTRICAL:

CURRENT RATING = 2A MAX

CONTACT RESISTANCE = 20mΩ MAX

ENVIRONMENTAL:

OPERATING TEMPERATURE = -55°C TO +125°C

NOTES:

1. FOR TAPE AND REELED COMPONENTS, SEE DRAWING S1751-XXR.
2. PACKING: 1,000 PER BAG.

SB	4	06.02.14	12358
NAME	ISS.	DATE	C/NOTE
APPROVED: S.BENNETT			
CHECKED: M.PLESTED			
DRAWN: W. J. BOURNE			
CUSTOMER REF.:			
ASSEMBLY DRG:			

HARWIN

www.harwin.com
technical@harwin.com

THIS DRAWING AND ANY INFORMATION OR DESCRIPTIVE MATTER SET OUT HEREON ARE CONFIDENTIAL AND COPYRIGHT PROPERTY OF THE HARWIN GROUP AND MUST NOT BE DISCLOSED, LOANED, COPIED OR USED FOR MANUFACTURING, TENDERING OR FOR ANY OTHER PURPOSE WITHOUT THEIR WRITTEN PERMISSION.

TOLERANCES

X. = ±1mm
X.X = ±0.25mm
X.XX = ±0.10mm
X.XXX = ±0.01mm

ANGLES = ±5°

UNLESS STATED

MATERIAL:

SEE ABOVE

FINISH: SEE ABOVE

S/AREA: mm²

TITLE:

SURFACE MOUNT TEST TERMINAL
(LOOSE)

DRAWING NUMBER:

S1751-XX

SHT
2 OF 2