LIA_DISCRETE_DONE

Project							
Name:	LIA_DISCRETE_DONE	**Creation time:**	04/07/2016 09:51:36	**Last change**	05/16/2026 01:02:32	**Author:**	Matthias Habermann
Last modified by:	2580028	**Version:**					
Comment:							

Operating system	
Name	**Description**
Operating system	Microsoft Windows 11 Enterprise
Version of the operating system	10.0.26100.0
Operating system service pack	
Version of the Internet Explorer	11.1882.26100.0
Computer name	D34400-J28XTH3
User name	VANIERCOLLEGE\2580028
Installation path of the TIA Portal	C:\Program Files\Siemens\Automation\Portal V19

Components		
Name	**Version**	**Release**
AWB V2 - Automation License Manager Plugin V2.0 (AWB_V2)	V2.0	V02.00.00.00_01.04.00.03
AWB V2 - Software Management Plugin V2.0 (AWB_V2)	V2.0	V02.00.00.00_01.04.00.03
AWB V2 - TIA Addin V2.0 (AWB_V2)	V2.0	V02.00.00.00_01.04.00.03
AWB V2 - Host V2.1 (AWB_V2)	V2.1	02.01.00.00_01.00.00.50
HelpViewer_WebApp - HelpViewer_WebApp V1.0 (HVWebApp)	V1.0	V01.00.00.00_02.00.00.58
S7-PLCSIM - S7-PLCSIM Setup V19.0 (PLCSIM_V19)	V19.0	V19.00.00.00_08.07.00.01
TIA Portal Project Server - TIA Portal Project Server Single SetupPackage V1.2 (ProjectServer)	V1.2	V01.02.00.00_00.00.04.16
AWB Host - TIAAdminV3 V3.0 (TIAAdminV3)	V3.0	V03.00.00.00_01.06.00.11
AWB Host - Automation License Manager Plugin V3.0 (TIAAdminV3)	V3.0	V03.00.00.00_01.06.00.11
AWB Host - Software Management Plugin V3.0 (TIAAdminV3)	V3.0	V03.00.00.00_01.06.00.11
AWB Host - TIA Addin V3.0 (TIAAdminV3)	V3.0	V03.00.00.00_01.06.00.11
AWB Host - Central User Management Plugin V3.0 (TIAAdminV3)	V3.0	V03.00.00.00_01.06.00.11
Totally Integrated Automation Portal V19 - TIA Portal Single SetupPackage V19.0 (TIAP19)	V19.0	V19.00.00.00_68.01.00.03
Siemens Totally Integrated Automation Portal V19 - SIMATIC Function Chart Plus V19.0 (TIAP19)	V19.0	V19.00.00.00_69.01.00.01
Siemens Totally Integrated Automation Portal V19 - SIMATIC Function Chart Plus Step7 V19.0 (TIAP19)	V19.0	V19.00.00.00_69.01.00.01
Siemens Totally Integrated Automation Portal V19 - FCPS7TIA V19.0 (TIAP19)	V19.0	V19.00.00.00_69.01.00.01
Siemens Totally Integrated Automation Portal V19 - HelpViewer Server V19.0 (TIAP19)	V19.0	V19.00.00.00_68.01.00.03
Siemens Totally Integrated Automation Portal V19 - HM All Editions Single SetupPackage V19.0 (TIAP19)	V19.0	V19.00.00.00_68.01.00.03
Siemens Totally Integrated Automation Portal V19 - HM NoBasic Single SetupPackage V19.0 (TIAP19)	V19.0	V19.00.00.00_68.01.00.03
Siemens Totally Integrated Automation Portal V19 - Hardware Support Base Package 0 V19.0 (TIAP19)	V19.0	V19.00.00.00_66.01.00.07
Siemens Totally Integrated Automation Portal V19 - Multiuser Client Single SetupPackage V19.0 (TIAP19)	V19.0	V19.00.00.00_68.01.00.03
Siemens Totally Integrated Automation Portal V19 - Version Control Interface SetupPackage V19.0 (TIAP19)	V19.0	V19.00.00.00_68.01.00.03
Siemens Totally Integrated Automation Portal V19 - STEP 7 Safety Single SetupPackage V19.0 (TIAP19)	V19.0	V19.00.00.00_68.01.00.03
Siemens Totally Integrated Automation Portal V19 - SESSP Single SetupPackage V19.0 (TIAP19)	V19.0	V19.00.00.00_68.01.00.03
Siemens Totally Integrated Automation Portal V19 - Startdrive G120 Hardware Support Base Package V19.0 (TIAP19)	V19.0	V19.00.00.00_20.00.00.02
Siemens Totally Integrated Automation Portal V19 - Startdrive S120 Hardware Support Base Package V19.0 (TIAP19)	V19.0	V19.00.00.00_20.00.00.02
Siemens Totally Integrated Automation Portal V19 - STARTDRIVE-COMMON V19.0 (TIAP19)	V19.0	V19.00.00.00_20.00.00.02
Siemens Totally Integrated Automation Portal V19 - STARTDRIVE-COMMON-OPENNESS V19.0 (TIAP19)	V19.0	V19.00.00.00_20.00.00.02
Siemens Totally Integrated Automation Portal V19 - SINAMICS-STARTDRIVE-COMMON-SAT V19.0 (TIAP19)	V19.0	V19.00.00.00_20.00.00.02
Siemens Totally Integrated Automation Portal V19 - SINAMICS Startdrive G110M, G120, G120C, G120D, G120P, G115D V19.0 (TIAP19)	V19.0	V19.00.00.00_20.00.00.02
Siemens Totally Integrated Automation Portal V19 - SINAMICS Startdrive FW44 V19.0 (TIAP19)	V19.0	V19.00.00.00_20.00.00.02
Siemens Totally Integrated Automation Portal V19 - SINAMICS Startdrive FW45 V19.0 (TIAP19)	V19.0	V19.00.00.00_20.00.00.02
Siemens Totally Integrated Automation Portal V19 - SINAMICS Startdrive FW46 V19.0 (TIAP19)	V19.0	V19.00.00.00_20.00.00.02
Siemens Totally Integrated Automation Portal V19 - SINAMICS Startdrive FW47 V19.0 (TIAP19)	V19.0	V19.00.00.00_20.00.00.02
Siemens Totally Integrated Automation Portal V19 - SINAMICS Startdrive FW4710 V19.0 (TIAP19)	V19.0	V19.00.00.00_20.00.00.02
Siemens Totally Integrated Automation Portal V19 - SINAMICS Startdrive FW4713 V19.0 (TIAP19)	V19.0	V19.00.00.00_20.00.00.02
Siemens Totally Integrated Automation Portal V19 - SINAMICS Startdrive FW4714 V19.0 (TIAP19)	V19.0	V19.00.00.00_20.00.00.02
Siemens Totally Integrated Automation Portal V19 - SINAMICS Startdrive FW473 V19.0 (TIAP19)	V19.0	V19.00.00.00_20.00.00.02
Siemens Totally Integrated Automation Portal V19 - SINAMICS Startdrive FW476 V19.0 (TIAP19)	V19.0	V19.00.00.00_20.00.00.02

Totally Integrated Automation Portal		

Name	Version	Release
Siemens Totally Integrated Automation Portal V19 - SINAMICS Startdrive FW479 V19.0 (TIAP19)	V19.0	V19.00.00.00_20.00.00.02
Siemens Totally Integrated Automation Portal V19 - SINAMICS Startdrive G130, G150, S120, S150, SINAMICS MV V19.0 (TIAP19)	V19.0	V19.00.00.00_20.00.00.02
Siemens Totally Integrated Automation Portal V19 - STEP 7 Single Setup-Package V19.0 (TIAP19)	V19.0	V19.00.00.00_68.01.00.03
Siemens Totally Integrated Automation Portal V19 - Hardware Support Base Package 02 V19.0 (TIAP19)	V19.0	V19.00.00.00_66.01.00.07
Siemens Totally Integrated Automation Portal V19 - Hardware Support Base Package 03 V19.0 (TIAP19)	V19.0	V19.00.00.00_66.01.00.07
Siemens Totally Integrated Automation Portal V19 - Hardware Support Base Package 04 V19.0 (TIAP19)	V19.0	V19.00.00.00_66.01.00.07
Siemens Totally Integrated Automation Portal V19 - Support Base Package TO-01 V19.0 (TIAP19)	V19.0	V19.00.00.00_66.01.00.07
Siemens Totally Integrated Automation Portal V19 - Support Base Package TO-02 V19.0 (TIAP19)	V19.0	V19.00.00.00_66.01.00.07
Siemens Totally Integrated Automation Portal V19 - Hardware Support Base Package WCF-01 V19.0 (TIAP19)	V19.0	V19.00.00.00_66.01.00.07
Siemens Totally Integrated Automation Portal V19 - TIACOMPCHECK Single SetupPackage V19.0 (TIAP19)	V19.0	V19.00.00.00_68.01.00.03
Siemens Totally Integrated Automation Portal V19 - TIA Portal Security Audit Log Single SetupPackage V19.0 (TIAP19)	V19.0	V19.00.00.00_68.01.00.03
Siemens Totally Integrated Automation Portal V19 - TIA Portal Shim Single SetupPackage V19.0 (TIAP19)	V19.0	V19.00.00.00_68.01.00.03
Siemens Totally Integrated Automation Portal V19 - Simatic Single Setup-Package V19.0 (TIAP19)	V19.0	V19.00.00.00_68.01.00.03
Siemens Totally Integrated Automation Portal V19 - WinCC Basic ES Single Package V19.0 (TIAP19)	V19.0	V19.00.00.00_68.01.00.03
Siemens Totally Integrated Automation Portal V19 - WinCC Basic ES Single SetupPackage V19.0 (TIAP19)	V19.0	V19.00.00.00_68.01.00.03
Siemens Totally Integrated Automation Portal V19 - WinCC CA ES Single SetupPackage V19.0 (TIAP19)	V19.0	V19.00.00.00_68.01.00.03
Siemens Totally Integrated Automation Portal V19 - Openness SetupPack-age V19.0 (TIAP19)	V19.0	V19.00.00.00_68.01.00.03
Siemens Totally Integrated Automation Portal V19 - WinCC Unified ES Sin-gle SetupPackage V19.0 (TIAP19)	V19.0	V19.00.00.00_68.01.00.03
Siemens Totally Integrated Automation Portal V19 - WinCC Transfer Manda-tory Single SetupPackage V19.0 (TIAP19)	V19.0	V19.00.00.00_68.01.00.03
User Management Component - UserManagementComponentx64 V2.12 (UMC64)	V2.12	V02.12.00.00_00.00.00.15
User Management Component - umtrayiconx64 V2.12 (UMC64)	V2.12	V02.12.00.00_00.00.00.15
WinCC Unified PC V19 - WinCC Unified PC V5.0 (WinCCUnified)	V5.0	V05.00.00.00_64.02.00.01
WinCC Unified PC V19 - LocalLogging V5.0 (WinCCUnified)	V5.0	V05.00.00.00_64.02.00.01
WinCC Runtime Advanced V17.0 - SIMATIC WinCC Runtime Advanced V17.0 (HMIRTM_V11)	V17.0 UPD6	V17.00.00.06_05.02.00.01
WinCC Runtime Advanced V17.0 - HMIRTM Tagging Package 02 Single SetupPackage V17.0 (HMIRTM_V11)	V17.0	V17.00.00.00_43.02.00.01
WinCC Runtime Advanced V17.0 - HMIRTM Tagging Package 01 Single SetupPackage V17.0 UPD6 (HMIRTM_V11)	V17.0 UPD6	V17.00.00.06_05.02.00.01
SIMATIC ODK 1500S - SIMATIC ODK 1500S V2.5 (ODK1500S25)	V2.5	V02.05.00.00_26.01.00.08
PLCSIM Advanced Single SetupPackage - PLCSIM Advanced Single Setup-Package V6.0 (PLCSIMADV)	V6.0	V06.00.00.00_68.01.00.03
SIMATIC S7-PCT - SIMATIC S7-PCT V3.5 SP3 Upd3 (S7PCT)	V3.5 + SP3 + Upd3	V03.05.03.03_01.05.00.01
SIMATIC Target V6.0 - SIMATIC Target -Base V6.0 (Target1500S60)	V6.0	V06.00.00.00_15.02.00.45
Siemens Totally Integrated Automation Portal V19 - Simatic Single Setup-Package 32 Bit V19.0 (TIAP19)	V19.0	V19.00.00.00_68.01.00.03
Siemens Totally Integrated Automation Portal V19 - WinCC Basic ES Single SetupPackage 32 Bit V19.0 (TIAP19)	V19.0	V19.00.00.00_68.01.00.03
AddinRolloutService	19.0.0.0	V19.00.00.00_68.01.00.03
SIMATIC HMI License Manager Panel Plugin (x64)	19.0.0.0	V19.00.00.00_68.01.00.03
Automation Access Control Component x64	05.01	K05.01.01.13_00.00.00.03
SIMATIC WinCC Runtime Advanced Driver (x64)	19.0.0.0	V19.00.00.00_68.01.00.03
ETWEventCollector	19.0.0.0	V19.00.00.00_68.01.00.03
SIMATIC NCM FWL 64	5.6.0.3	K5.6.0.3_1.1.0.2
NCM GPRS 64	01.02.00.00	V1.2.0.0_2.1.0.1
Open SSL 3	3.0.2.1	V03.00.02.01_00.00.00.01
SIMATIC PLCSIM 64	19.00.00	19.00.00.00_01.07.00.01
SIMATIC PLCSIM Advanced Driver64	6.0.0.0	V06.00.00.00_68.01.00.03
SIMATIC Device Drivers	9.3	09.03.05.00_01.02.00.26
TelemetryConnector	2.1.0.3	V02.01.00.03_01.00.00.00
Automation Access Control Component	05.01	K05.01.01.13_00.00.00.03
SIMATIC Colour Editor	5.2.5.0	K5.2.5.0_1.1.0.1
License Logon Interface	5.0	05.00.00.00_01.04.00.01
SIEMENS OPC	3.9	03.09.12.02_01.01.00.04
OPC-XML-Gateway	19.0.0.0	V19.00.00.00_68.01.00.03
SIMATIC PLCSIM Advanced SimRT	6.0.0.0	V06.00.00.00_68.01.00.03
SIMATIC HMI ProSave	19.0.0.0	V19.00.00.00_68.01.00.03
SIMATIC HMI Symbol Library	17.0.0.6	V17.00.00.06_05.02.00.01
SIMATIC HMI Touch Input	17.0.0.6	V17.00.00.06_05.02.00.01
SIMATIC Version View	1.7.12.0	K1.7.12.0_1.1.0.1
SIMATIC Common Services	5.3.17.0	K5.3.17.0_1.1.0.1
SIMATIC Device Drivers WoW	29.3	29.03.05.00_01.02.00.26
SIMATIC Event Database	5.7	05.07.02.01_02.01.00.01
SIMATIC GRAPH-Visualisierung	5.2.4.0	K5.2.4.0_1.1.0.1
SIMATIC GSD CONTROL	3.5.7.0	K3.5.7.0_2.1.0.1
SIMATIC GSD Interpreter	3.0.0.0	V3.0.0.0_9.1.0.1
SIMATIC Interface Editor	5.4.27.0	K5.4.27.0_2.1.0.1
SIMATIC Extended Interfaces	5.7.0.0	V5.7.0.0_5.1.0.1
SIMATIC LanguageSupportTool	5.8.5.0	K5.8.5.0_2.1.0.1
SIMATIC Condition Editor	5.6.2.0	K5.6.2.0_1.1.0.1

Name	Version	Release
SIMATIC NCM	5.7.2.0	K5.7.2.0_17.1.0.1
SIMATIC Process Diagnosis Base	5.7.0.2	K5.7.0.2_3.1.0.1
SIMATIC Process Diagnosis Database	5.7.0.0	V5.7.0.0_5.1.0.1
SIMATIC DIAGNOSTIC REPEATER GUI CTRL	5.2.3.0	K5.2.3.0_1.1.0.1
SIMATIC Grid Control	3.1.1.0	K3.1.1.0_1.1.0.1
SIMATIC S7-Status-OCX	5.3.15.0	K5.3.15.0_3.1.0.1
SIMATIC Technological Parameter Assignment	5.3.12.0	K5.3.12.0_3.1.0.1
SIMATIC X-Ref Control	5.3.0.0	V5.3.0.0_4.1.0.1
SIMATIC STEP 7 Help Viewer	1.0.7.0	K1.0.7.0_3.1.0.1
SIMATIC SCL Compiler	5.7.0.1	K5.7.0.1_1.1.0.1
SeCon	2.9	V02.09.00.00_01.03.00.01
SIMATIC SCS	K8.0.0.1	V08.00.00.01_01.09.00.02
WinCC Runtime Advanced Simulator	17.0.0.0	V17.00.00.00_43.02.00.01


Products

Name	Version	Release
TIA Portal Help Viewer	V1.0	V01.00.00.00_02.00.00.43
S7-PLCSIM	V19	19.00.00.00_08.07.00.01
TIA Portal Project Server	V1.2	V01.02.00.00_00.00.04.16
TIA Administrator	V3.0	V03.00.00.00_01.06.00.11
SIMATIC STEP 7 CFC	V19.0	V19.00.00.00_69.01.00.01
SINAMICS Startdrive Advanced G110M, G120, G120C, G120D, G120P, G115D	V19.0	V19.00.00.00_20.00.00.02
SINAMICS Startdrive Advanced G130, G150, S120, S150, SINAMICS MV, G220, S200, S210	V19.0	V19.00.00.00_20.00.00.02
SIMATIC STEP 7 Prof - STEP 7 Safety - WinCC Adv + Unified + Prof	V19.0	V19.00.00.00_68.01.00.03
User Management Component	V2.10	V02.10.00.00_00.00.00.38
UMC Status Application	V2.10	V02.10.00.00_00.00.00.38
SIMATIC WinCC Unified PC	V19	19.00.00.00_00.00.64.02
SIMATIC WinCC Runtime Advanced	V17.0	V17.00.00.00_43.02.00.01
SIMATIC WinCC Runtime Advanced Simulation	V17.0 Upd6	V17.00.00.06_05.02.00.01
SIMATIC ODK 1500S	V2.5	V02.05.00.00_26.01.00.08
S7-PLCSIM Advanced	V6.0	V06.00.00.00_68.01.00.03
S7-PCT	V3.5 SP3 Upd3	V03.05.03.03_01.05.00.01
SIMATIC Target	V6.0	V06.00.00.00_15.02.00.45
Automation License Manager	V6.2 + SP4	06.02.04.00_00.00.00.05
SIMATIC WinCC/Audit Viewer	2008 SP2	V07.02.00.00_01.05.00.02
S7 Distributed Safety Programming	V5.4 + SP5	K5.4.5.0_3.5.0.2
SIMATIC OPC-XML-Gateway	V19.0	V19.00.00.00_68.01.00.03
S7-PLCSIM	V5.4 + SP8 + Upd2	V05.04.08.02_02.40.00.01
SIMATIC ProSave	V19.0	V19.00.00.00_68.01.00.03
SIMATIC S7-Block Privacy Professional 2021 SR2	V1.0 + SP6	K1.0.6.0_4.1.0.1
S7 F ConfigurationPack	V5.5 + SP13	K5.5.13.0_7.1.0.1
SIMATIC S7-GRAPH Professional 2021 SR2	V5.7 + SP1	K5.7.1.0_5.1.0.1
S7-PCT	V3.5 SP3 Upd3	K3.5.3.3_1.5.0.1
SIMATIC S7-SCL Professional 2021 SR2	V5.7 + HF1	K5.7.0.1_3.1.0.1
STEP 7 Professional 2021 SR2	V5.7 + SP2	K5.7.2.0_17.1.0.1
SIMATIC S7-Web2PLC Professional 2021 SR2	V1.0 + SP5	K1.0.5.0_4.1.0.1

LIA_DISCRETE_DONE

PLC_1 [CPU 1211C DC/DC/DC]

PLC_1					
General\Project information					
Name	PLC_1	**Author**	i72014	**Comment**	
Slot	1	**Rack**	0		
General\Catalog information					
Short designation	CPU 1211C DC/DC/DC	**Description**	Work memory 50 KB; 24VDC power supply with DI6 x 24VDC SINK/ SOURCE, DQ4 x 24VDC and AI2 on board; 3 high-speed counters (expandable with digital signal board) and 4 pulse outputs on board; signal board expands on-board I/O; up to 3 communication modules for serial communication; PROFINET interface for programming, HMI and PLC to PLC communication	**Article number**	6ES7 211-1AE40-0XB0
Firmware version	V4.1		False		
General\Identification & Maintenance					
Plant designation		**Location identifier**		**Installation date**	2016-04-07 09:52:18.455
Additional information					
PROFINET interface [X1]\General					
Name	PROFINET-Schnittstelle_1	**Author**	i72014	**Comment**	
PROFINET interface [X1]\General\Project information					
Name	DI 6/DQ 4_1	**Comment**		**Name**	AI 2_1
Comment					
PROFINET interface [X1]\Ethernet addresses\Interface networked with					
Subnet:	Not connected				
PROFINET interface [X1]\Ethernet addresses\Internet protocol version 4 (IPv4)					
IP configuration	Set IP address in the project	**IP address:**	192.168.0.1	**Subnet mask:**	255.255.255.0
Use router	False				
PROFINET interface [X1]\Ethernet addresses\PROFINET					
PROFINET device name is set directly at the device	False	**Generate PROFINET device name automatically**	True	**PROFINET device name:**	plc_1
Converted name:	plcxb1d0ed	**Device number:**	0		
PROFINET interface [X1]\Time synchronization					
Enable time synchronization via NTP server	Enable time synchronization via NTP server		IP addresses	**Server 1**	0.0.0.0
Server 2	0.0.0.0	**Server 3**	0.0.0.0	**Server 4**	0.0.0.0
Update interval	10sec				
PROFINET interface [X1]\Digital inputs\Channel0					
Channel address	I0.0	**Input filters**	6.4 millisec	**Enable pulse catch**	0
PROFINET interface [X1]\Digital inputs\Channel0					
Enable rising edge detection	0	**Prefix Event Rising Edge**	49152	**Event name:**	0
Hardware interrupt:	0	**Rising edge0**	Rising edge0		
PROFINET interface [X1]\Digital inputs\Channel0					
Enable falling edge detection	0	**Prefix Event Falling Edge**	49280	**Event name:**	0
Hardware interrupt:	0	**Falling edge0**	Falling edge0		
PROFINET interface [X1]\Digital inputs\Channel1					
Channel address	I0.1	**Input filters**	6.4 millisec	**Enable pulse catch**	0
PROFINET interface [X1]\Digital inputs\Channel1					
Enable rising edge detection	0	**Prefix Event Rising Edge**	49153	**Event name:**	0
Hardware interrupt:	0	**Rising edge1**	Rising edge1		
PROFINET interface [X1]\Digital inputs\Channel1					
Enable falling edge detection	0	**Prefix Event Falling Edge**	49281	**Event name:**	0
Hardware interrupt:	0	**Falling edge1**	Falling edge1		
PROFINET interface [X1]\Digital inputs\Channel2					
Channel address	I0.2	**Input filters**	6.4 millisec	**Enable pulse catch**	0
PROFINET interface [X1]\Digital inputs\Channel2					
Enable rising edge detection	0	**Prefix Event Rising Edge**	49154	**Event name:**	0
Hardware interrupt:	0	**Rising edge2**	Rising edge2		
PROFINET interface [X1]\Digital inputs\Channel2					
Enable falling edge detection	0	**Prefix Event Falling Edge**	49282	**Event name:**	0
Hardware interrupt:	0	**Falling edge2**	Falling edge2		
PROFINET interface [X1]\Digital inputs\Channel3					
Channel address	I0.3	**Input filters**	6.4 millisec	**Enable pulse catch**	0
PROFINET interface [X1]\Digital inputs\Channel3					
Enable rising edge detection	0	**Prefix Event Rising Edge**	49155	**Event name:**	0
Hardware interrupt:	0	**Rising edge3**	Rising edge3		
PROFINET interface [X1]\Digital inputs\Channel3					
Enable falling edge detection	0	**Prefix Event Falling Edge**	49283	**Event name:**	0
Hardware interrupt:	0	**Falling edge3**	Falling edge3		
PROFINET interface [X1]\Digital inputs\Channel4					
Channel address	I0.4	**Input filters**	6.4 millisec	**Enable pulse catch**	0

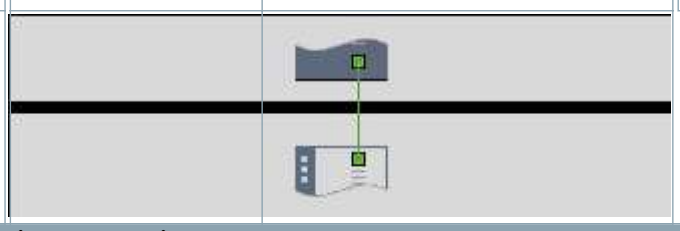PROFINET interface [X1]\Digital inputs\Channel4					
Enable rising edge detection	0	**Prefix Event Rising Edge**	49156	**Event name:**	0
Hardware interrupt:	0	**Rising edge4**	Rising edge4		
PROFINET interface [X1]\Digital inputs\Channel4					
Enable falling edge detection	0	**Prefix Event Falling Edge**	49284	**Event name:**	0
Hardware interrupt:	0	**Falling edge4**	Falling edge4		
PROFINET interface [X1]\Digital inputs\Channel5					
Channel address	I0.5	**Input filters**	6.4 millisec	**Enable pulse catch**	0
PROFINET interface [X1]\Digital inputs\Channel5					
Enable rising edge detection	0	**Prefix Event Rising Edge**	49157	**Event name:**	0
Hardware interrupt:	0	**Rising edge5**	Rising edge5		
PROFINET interface [X1]\Digital inputs\Channel5					
Enable falling edge detection	0	**Prefix Event Falling Edge**	49285	**Event name:**	0
Hardware interrupt:	0	**Falling edge5**	Falling edge5		
PROFINET interface [X1]\Analog inputs\Noise reduction					
Integration time	50 Hz (20 ms)				
PROFINET interface [X1]\Analog inputs\Channel0					
Channel address	IW64	**Measurement type**	Voltage	**Voltage range**	0..10 V
Smoothing	Weak (4 cycles)			**Enable overflow diagnostics**	1
PROFINET interface [X1]\Analog inputs\Channel1					
Channel address	IW66	**Measurement type**	Voltage	**Voltage range**	0..10 V
Smoothing	Weak (4 cycles)			**Enable overflow diagnostics**	1
PROFINET interface [X1]\Digital outputs					
Reaction to CPU STOP	Use substitute value				
PROFINET interface [X1]\Digital outputs\Channel0					
Channel address	Q0.0	**Substitute a value of 1 on a change from RUN to STOP.**	0		
PROFINET interface [X1]\Digital outputs\Channel1					
Channel address	Q0.1	**Substitute a value of 1 on a change from RUN to STOP.**	0		
PROFINET interface [X1]\Digital outputs\Channel2					
Channel address	Q0.2	**Substitute a value of 1 on a change from RUN to STOP.**	0		
PROFINET interface [X1]\Digital outputs\Channel3					
Channel address	Q0.3	**Substitute a value of 1 on a change from RUN to STOP.**	0		
PROFINET interface [X1]\Operating mode					
IO controller	True	**IO system**		**Device number**	0
IO device	False				
PROFINET interface [X1]\I/O addresses\Input addresses					
Start address	0.0	**End address**	0.7	**Organization block**	65535
Process image	65535				
PROFINET interface [X1]\I/O addresses\Input addresses					
Start address	64	**End address**	67	**Organization block**	65535
Process image	65535				
PROFINET interface [X1]\I/O addresses\Output addresses					
Start address	0.0	**End address**	0.7	**Organization block**	0
Process image	0				
PROFINET interface [X1]\Advanced options\Interface options					
Support device replacement without exchangeable medium	True	**Permit overwriting of device names of all assigned IO devices**	False	**Use IEC V2.2 LLDP mode**	False
Keep-Alive connection monitoring:	30s				
PROFINET interface [X1]\Advanced options\Real time settings\IO communication					
Send clock:	1.000ms				
PROFINET interface [X1]\Advanced options\Real time settings\Real time options					
Calculated bandwidth for cyclic IO data:	0.000ms	**Calculated bandwidth for cyclic IO data:**	0.000%		
PROFINET interface [X1]\Advanced options\Port [X1 P1]\General					
Name	Port_1	**Author**	i72014	**Comment**	
PROFINET interface [X1]\Advanced options\Port [X1 P1]\Port interconnection\Local port:					
Local port:	PLC_1\PROFINET-Schnittstelle_1 [X1]\Port_1 [X1 P1]	**Medium:**	Copper	**Cable name:**	---
					
PROFINET interface [X1]\Advanced options\Port [X1 P1]\Port interconnection\Partner port:					
	Monitoring of partner port is not possible	**Partner port:**	Any partner		
PROFINET interface [X1]\Advanced options\Port [X1 P1]\Port options\Activate					
Activate this port for use	True				

PROFINET interface [X1]\Advanced options\Port [X1 P1]\Port options\Connection					
Transmission rate / duplex:	Automatic	**Monitor**	False	**Enable autonegotiation**	True
PROFINET interface [X1]\Advanced options\Port [X1 P1]\Port options\Boundaries					
End of detection of accessible devices	False	**End of topology discovery**	False	**End of the sync domain**	False
PROFINET interface [X1]\Web server access					
Enable Web server for the IP address of this interface	False	**The Web server must also be activated in the properties of the PLC.**			
High speed counters (HSC)\HSC1\General\Enable					
Enable this high speed counter	0	**Enable this high speed counter**	0	**Enable this high speed counter**	0
Enable this high speed counter	0	**Enable this high speed counter**	0	**Enable this high speed counter**	0
High speed counters (HSC)\HSC1\General\Project information					
Name	HSC_1	**Comment**		**Name**	HSC_2
Comment		**Name**	HSC_3	**Comment**	
Name	HSC_4	**Comment**		**Name**	HSC_5
Comment		**Name**	HSC_6	**Comment**	
High speed counters (HSC)\HSC1\I/O addresses\Input addresses					
Start address	1000.0	**End address**	1003.7	**Start address**	1004.0
End address	1007.7	**Organization block**	0	**Start address**	1008.0
End address	1011.7	**Organization block**	0	**Process image**	0
Start address	1012.0	**End address**	1015.7	**Organization block**	0
Process image	0	**Start address**	1016.0	**End address**	1019.7
Organization block	0	**Process image**	0	**Start address**	1020.0
End address	1023.7	**Organization block**	0	**Process image**	0
Organization block	0	**Process image**	0	**Process image**	0
Pulse generators (PTO/PWM)\PTO1/PWM1\General\Enable					
Enable this pulse generator	0	**Enable this pulse generator**	0		
Pulse generators (PTO/PWM)\PTO1/PWM1\General\Project information					
Name	Pulse_1	**Comment**		**Name**	Pulse_2
Comment					
Pulse generators (PTO/PWM)\PTO1/PWM1\I/O addresses\Output addresses					
Start address	1000.0	**End address**	1001.7	**Start address**	1002.0
End address	1003.7	**Organization block**	0	**Organization block**	0
Process image	0	**Process image**	0		
Startup					
Startup after POWER ON	Warm restart - mode before POWER OFF	**Comparison preset to actual configuration**	Startup CPU even if mismatch	**Configuration time**	60000ms
OBs should be interruptible	1				
Cycle					
Cycle monitoring time [ms]	150ms			**Enable minimum cycle time for cyclic OBs**	1
Minimum cycle time	30ms				
Communication load					
Cycle load due to communication [%]	20%				
System and clock memory\System memory bits					
Enable the use of system memory byte	1	**Address of system memory byte (MBx)**	1	**First cycle**	%M1.0 (FirstScan)
Diagnostic status changed	%M1.1 (DiagStatusUpdate)	**Always 1 (high)**	%M1.2 (AlwaysTRUE)	**Always 0 (low)**	%M1.3 (AlwaysFALSE)
System and clock memory\Clock memory bits					
Enable the use of clock memory byte	1	**Address of clock memory byte (MBx)**	0	**10 Hz clock**	%M0.0 (Clock_10Hz)
5 Hz clock	%M0.1 (Clock_5Hz)	**2.5 Hz clock**	%M0.2 (Clock_2.5Hz)	**2 Hz clock**	%M0.3 (Clock_2Hz)
1.25 Hz clock	%M0.4 (Clock_1.25Hz)	**1 Hz clock**	%M0.5 (Clock_1Hz)	**0.625 Hz clock**	%M0.6 (Clock_0.625Hz)
0.5 Hz clock	%M0.7 (Clock_0.5Hz)				
Web server\General					
Activate Web server on all modules of this device	False	**Permit access only with HTTPS**	True		
Web server\Automatic update					
Enable automatic update	True	**Update interval**	0s		

Web server\User interface languages

Assign project language	User interface languages
English (United States)	German
English (United States)	English
English (United States)	French
English (United States)	Spanish
English (United States)	Italian
English (United States)	Chinese (simplified)

Web server\User management

User name	User rights
Everybody	

Web server\User-defined web pages

Application name	HTML source path	Default HTML page	Files with dynamic content	Web DB number	Fragment DB number
		index.htm	.htm;.html	333	334

Web server\Overview of interfaces

Device	Interface	Enabled web server access
PLC_1	PROFINET-Schnittstelle_1	False

User interface languages	
Assign project language	**User interface languages**
English (United States)	German
English (United States)	English
English (United States)	French
English (United States)	Spanish
English (United States)	Italian
English (United States)	Chinese (simplified)

Time of day\Local time					
Time zone	(UTC +01:00) Berlin, Bern, Brussels, Rome, Stockholm, Vienna				
Time of day\Daylight saving time					
Activate daylight saving time	1	**Difference between standard and daylight saving time**	60min		
Time of day\Daylight saving time\Start of daylight saving time					
First week of the month:	Last		Sunday	**in**	March
at	1:00 a.m.				
Time of day\Daylight saving time\Start of standard time					
	Last		Sunday	**in**	October
at	2:00 a.m.				
Protection & Security					
Level of protection	No protection				
Protection & Security\Connection mechanisms					
Permit access with PUT/GET communication from remote partner	True				
Configuration control\Configuration control for central configuration					
Allow to reconfigure the device via the user program	0				

Connection resources

	Station resources - Reserved - Maximum	Station resources - Reserved - Configured	Station resources - Dynamic - Configured	Module resources - PLC_1 [CPU 1211C DC/DC/DC] - Configured
Maximum number of resources:		62	6	68
	Maximum	Configured	Configured	Configured
PG communication:	4	-	-	-
HMI communication:	12	0	0	0
S7 communication:	8	0	0	0
Open user communication:	8	0	0	0
Web communication:	30	-	-	-
Other communication:	-	-	0	0
Total resources used:		0	0	0
Available resources:		62	6	68

Overview of addresses\Overview of addresses\Overview of addresses					
Inputs	True	**Outputs**	True	**Address gaps**	False
Slot	True				

Type	Addr. from	Addr. to	Module	PIP	Device name	Device number	Size	Master / IO system	Rack	Slot
I	0	0	DI 6/DQ 4_1	None	PLC_1 [CPU 1211C DC/DC/DC]	-	1 Bytes	-	0	1 1
O	0	0	DI 6/DQ 4_1	Automatic update	PLC_1 [CPU 1211C DC/DC/DC]	-	1 Bytes	-	0	1 1
I	64	67	AI 2_1	None	PLC_1 [CPU 1211C DC/DC/DC]	-	4 Bytes	-	0	1 2
I	1000	1003	HSC_1	Automatic update	PLC_1 [CPU 1211C DC/DC/DC]	-	4 Bytes	-	0	1 16
I	1004	1007	HSC_2	Automatic update	PLC_1 [CPU 1211C DC/DC/DC]	-	4 Bytes	-	0	1 17
I	1008	1011	HSC_3	Automatic update	PLC_1 [CPU 1211C DC/DC/DC]	-	4 Bytes	-	0	1 18
I	1012	1015	HSC_4	Automatic update	PLC_1 [CPU 1211C DC/DC/DC]	-	4 Bytes	-	0	1 19
I	1016	1019	HSC_5	Automatic update	PLC_1 [CPU 1211C DC/DC/DC]	-	4 Bytes	-	0	1 20
I	1020	1023	HSC_6	Automatic update	PLC_1 [CPU 1211C DC/DC/DC]	-	4 Bytes	-	0	1 21
O	1000	1001	Pulse_1	Automatic update	PLC_1 [CPU 1211C DC/DC/DC]	-	2 Bytes	-	0	1 32
O	1002	1003	Pulse_2	Automatic update	PLC_1 [CPU 1211C DC/DC/DC]	-	2 Bytes	-	0	1 33
O	1004	1005	Pulse_3	Automatic update	PLC_1 [CPU 1211C DC/DC/DC]	-	2 Bytes	-	0	1 34
O	1006	1007	Pulse_4	Automatic update	PLC_1 [CPU 1211C DC/DC/DC]	-	2 Bytes	-	0	1 35


LIA_DISCRETE_DONE / PLC_1 [CPU 1211C DC/DC/DC] / Program blocks

Turn [OB1]


Turn Properties							
General							
Name	Turn	**Number**	1	**Type**	OB	**Language**	LAD
Numbering	Automatic						
Information							
Title	"Main Program Sweep (Cycle)"	**Author**		**Comment**		**Family**	
Version	0.1	**User-defined ID**					

Name	Data type	Default value	Comment
Input			
Initial_Call	Bool		Initial call of this OB
Remanence	Bool		=True, if remanent data are available
Temp			
Constant			


Network 1:

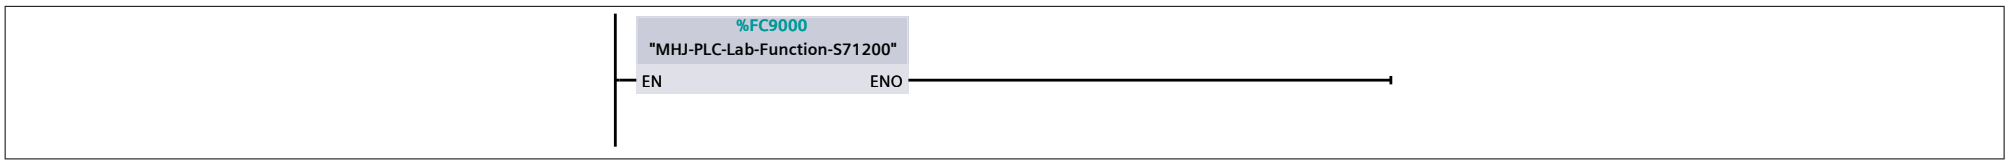

Network 2:

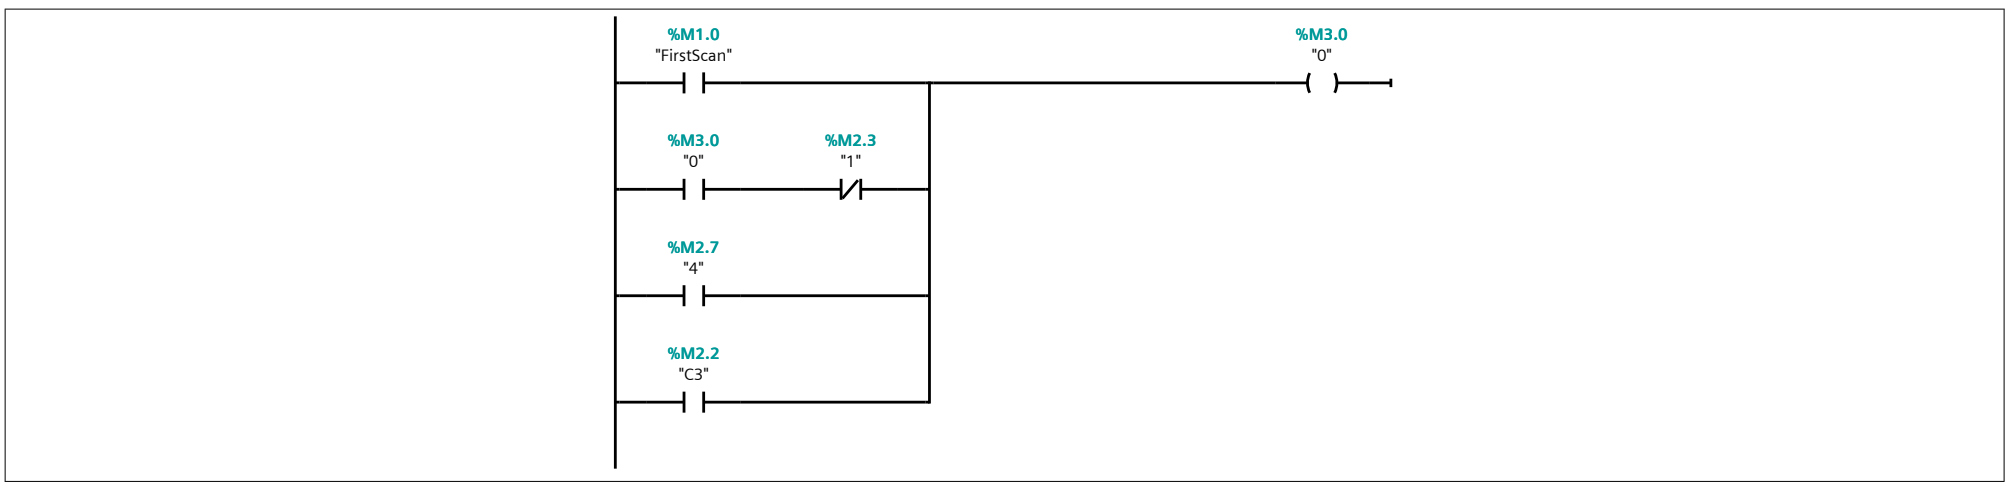


Network 3:

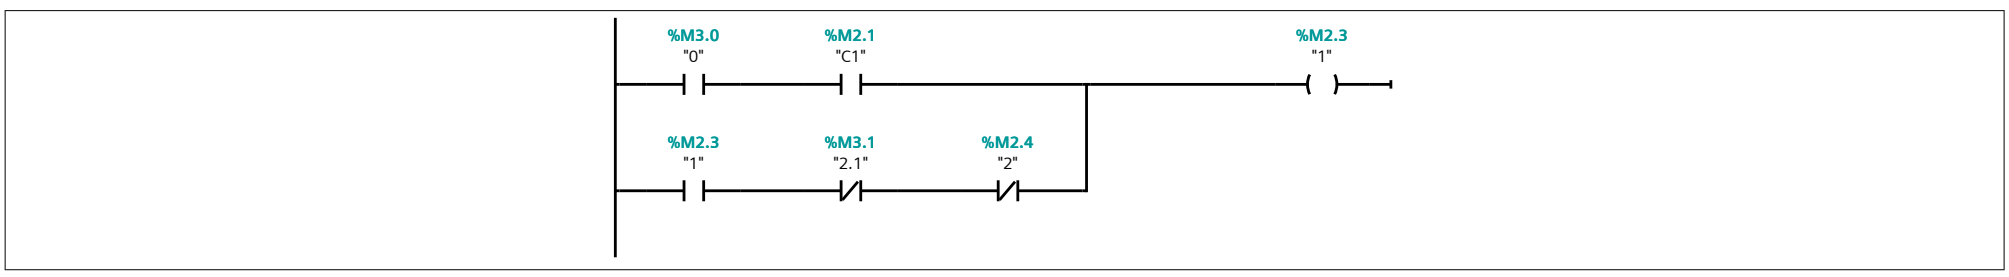


Network 4:

BLUE DETECTION!!!

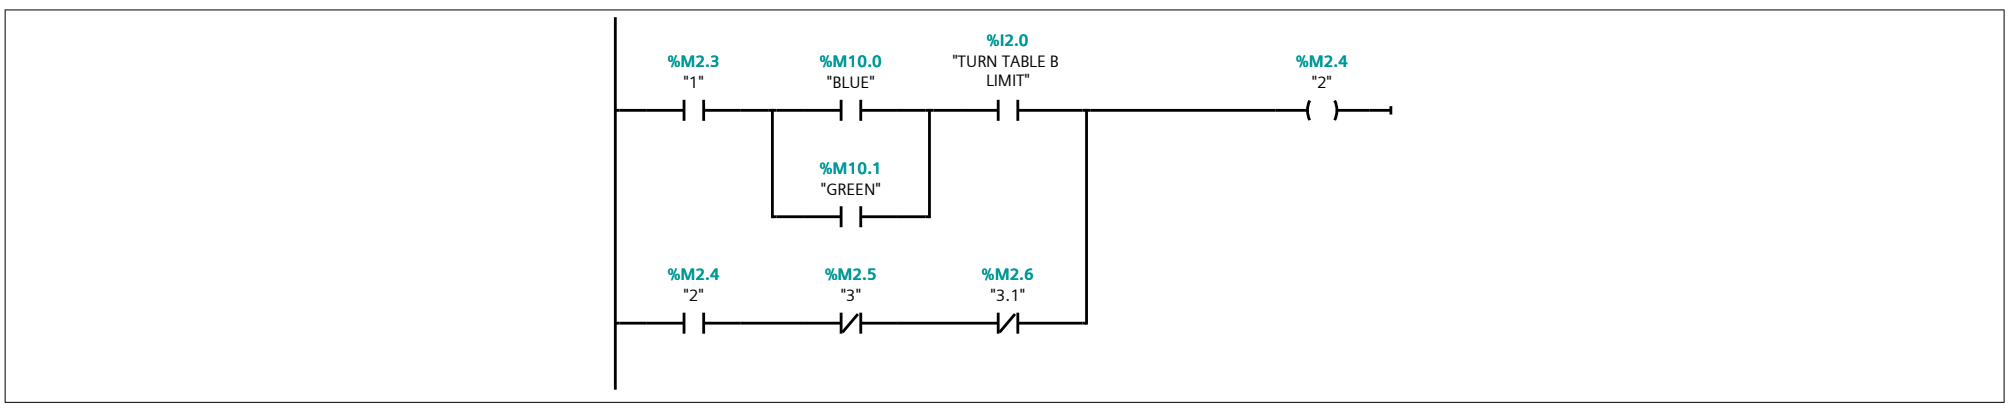


Network 5:

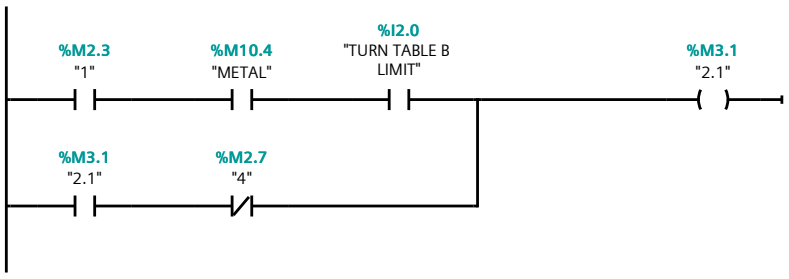


Network 6:


GREEN DETECTION

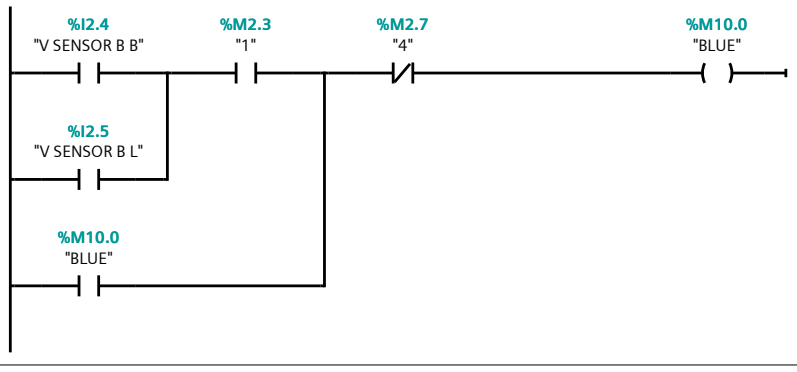


Network 7:

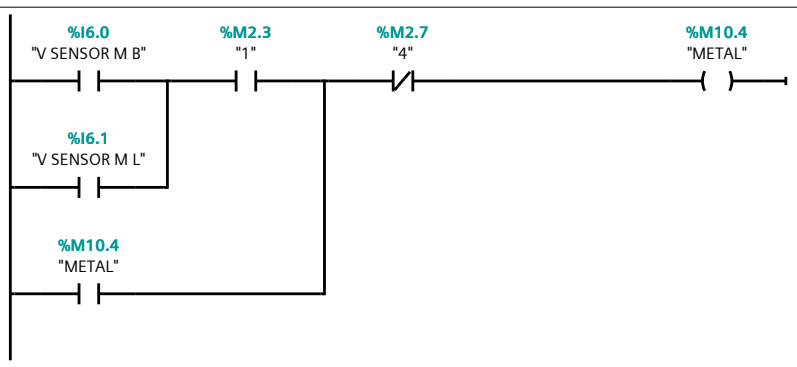


Network 8:

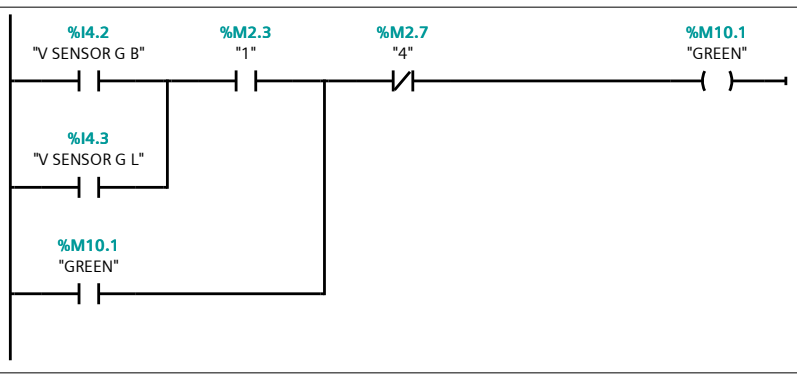


Network 9:

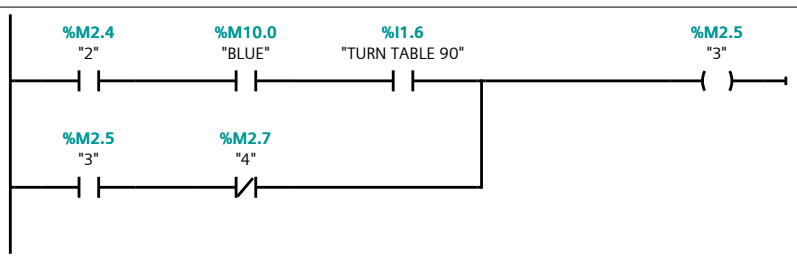


Network 10:

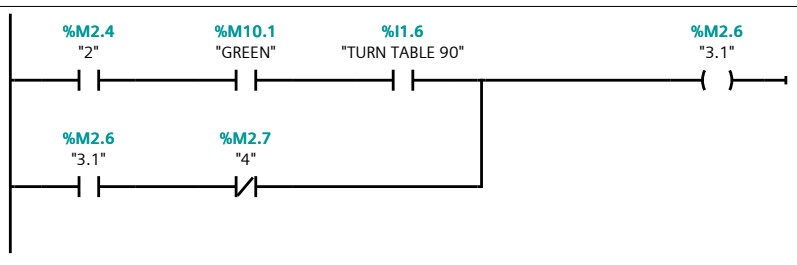


Network 11:

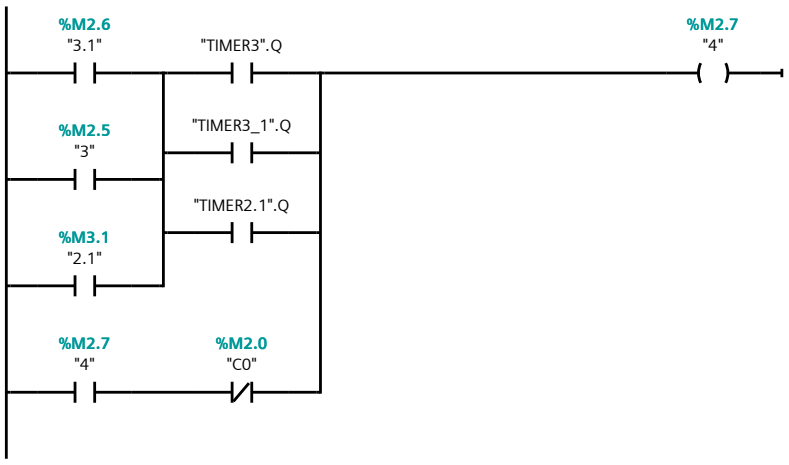


Network 12:

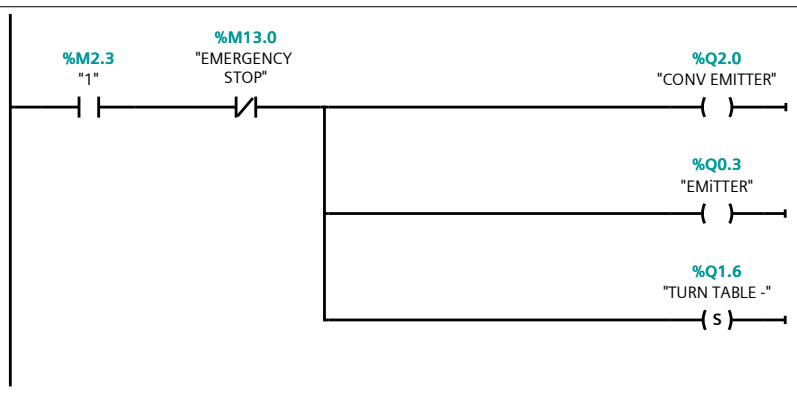


Network 13:

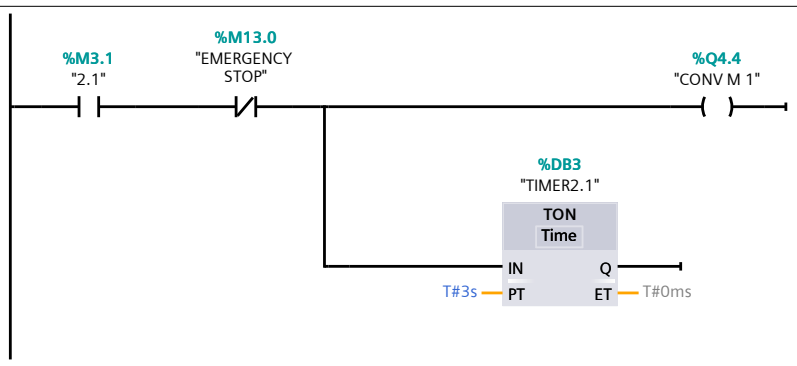


Network 14:

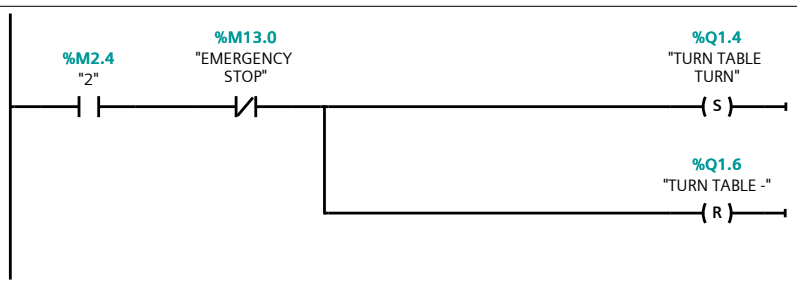


Network 15:

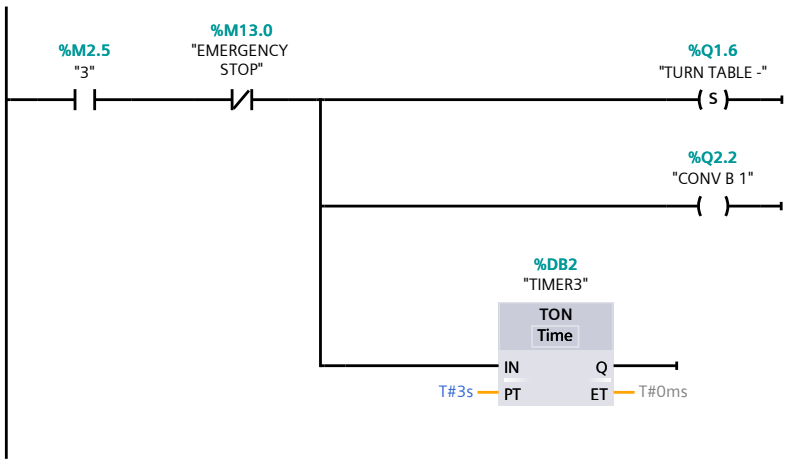


Network 16:

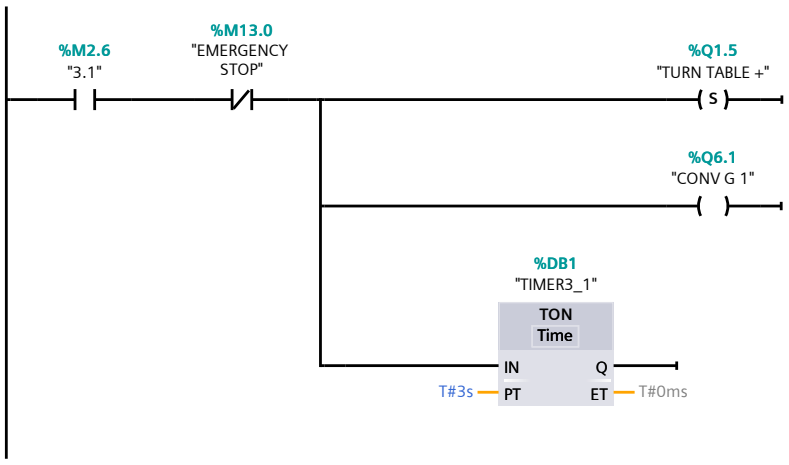

Network 17:

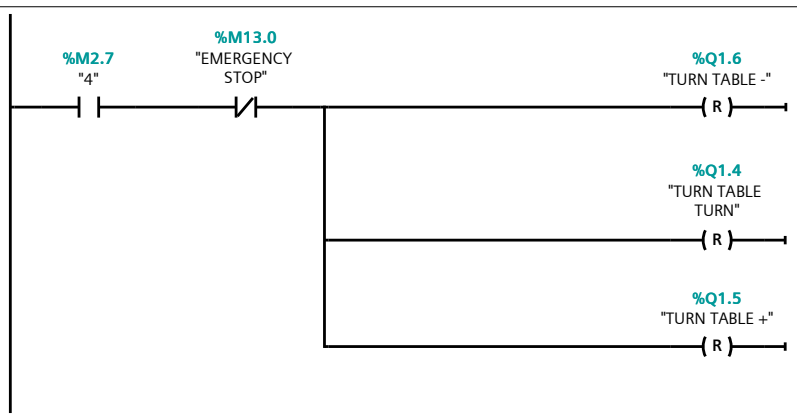

Network 18:

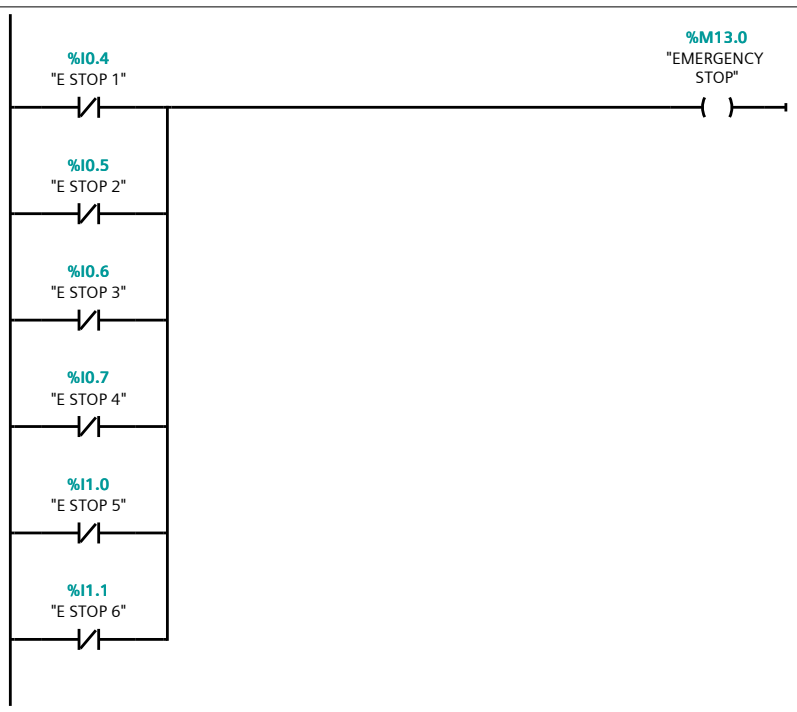

LIA_DISCRETE_DONE / PLC_1 [CPU 1211C DC/DC/DC] / Program blocks

MHJ-PLC-Lab-Function-S71200 [FC9000]

MHJ-PLC-Lab-Function-S71200 Properties							
General							
Name	MHJ-PLC-Lab-Function-S71200	**Number**	9000	**Type**	FC	**Language**	SCL
Numbering	Manual						
Information							
Title		**Author**		**Comment**		**Family**	
Version	0.1	**User-defined ID**					

Name	Data type	Default value	Comment
Input			
Output			
InOut			
▼ Temp			
rdTimeReturn	Int		
▼ outputTime	DTL		
YEAR	UInt		
MONTH	USInt		
DAY	USInt		
WEEKDAY	USInt		
HOUR	USInt		
MINUTE	USInt		
SECOND	USInt		
NANOSECOND	UDInt		
SyncVal	Byte		
forVal	Int		
forVal_2	Int		
Value	Byte		
▼ Constant			
CompVal	Byte	16#34	
Value_01	Byte	16#11	
Value_01_DW	DWord	16#A165_D992	
Value_02_DW	DWord	16#58BE_4401	
▼ Return			
MHJ-PLC-Lab-Function-S71200	Void		

```
0001
0002 #Value:=PEEK(area := 16#82,
0003    dbNumber := 0,
0004    byteOffset := 511);
0005 #Value := #Value + 1;
0006
0007 POKE(area := 16#82,
0008    dbNumber := 0,
0009    byteOffset := 511,
0010    value := #Value);
0011
0012 POKE(area:=16#81,
0013    dbNumber:=0,
0014    byteOffset:=1016,
0015    value:=#Value_01_DW);
0016 POKE(area := 16#81,
0017    dbNumber := 0,
0018    byteOffset := 1020,
0019    value := #Value_02_DW);
0020
0021 POKE(area := 16#81,
0022    dbNumber := 0,
0023    byteOffset := 511,
0024    value := B#16#00);
0025
0026 FOR #forVal := 0 TO 120 DO
0027   FOR #forVal_2:=0 TO 10 DO
0028     #rdTimeReturn:=RD_SYS_T(#outputTime);
0029     #rdTimeReturn := WR_SYS_T(#outputTime);
0030     #rdTimeReturn := RD_SYS_T(#outputTime);
0031     #rdTimeReturn := WR_SYS_T(#outputTime);
0032   END_FOR;
0033   #SyncVal:= PEEK(area := 16#81,
0034            dbNumber := 0,
0035            byteOffset := 511);
0036   IF #SyncVal = #CompVal THEN
0037      GOTO M_1;
0038   END_IF;
0039 END_FOR;
0040 RETURN;
0041
0042 M_1:
0043 POKE(area := 16#81,
```

```
0044     dbNumber := 0,
0045     byteOffset := 511,
0046     value := B#16#0);
0047
0048
0049
```

Symbol	Address	Type	Comment
#CompVal	16#34	Byte	
#forVal		Int	
#forVal_2		Int	
#outputTime		DTL	
#rdTimeReturn		Int	
#SyncVal		Byte	
#Value		Byte	
#Value_01_DW	16#A165_D992	DWord	
#Value_02_DW	16#58BE_4401	DWord	

LIA_DISCRETE_DONE / PLC_1 [CPU 1211C DC/DC/DC] / Program blocks


ROBOT ARM BLUE [OB123]

ROBOT ARM BLUE Properties							
General							
Name	ROBOT ARM BLUE	**Number**	123	**Type**	OB	**Language**	LAD
Numbering	Automatic						
Information							
Title	"Main Program Sweep (Cycle)"	**Author**		**Comment**		**Family**	
Version	0.1	**User-defined ID**					


Name	Data type	Default value	Comment
▼ Input			
Initial_Call	Bool		Initial call of this OB
Remanence	Bool		=True, if remanent data are available
Temp			
Constant			

Network 1:


If a base is detected

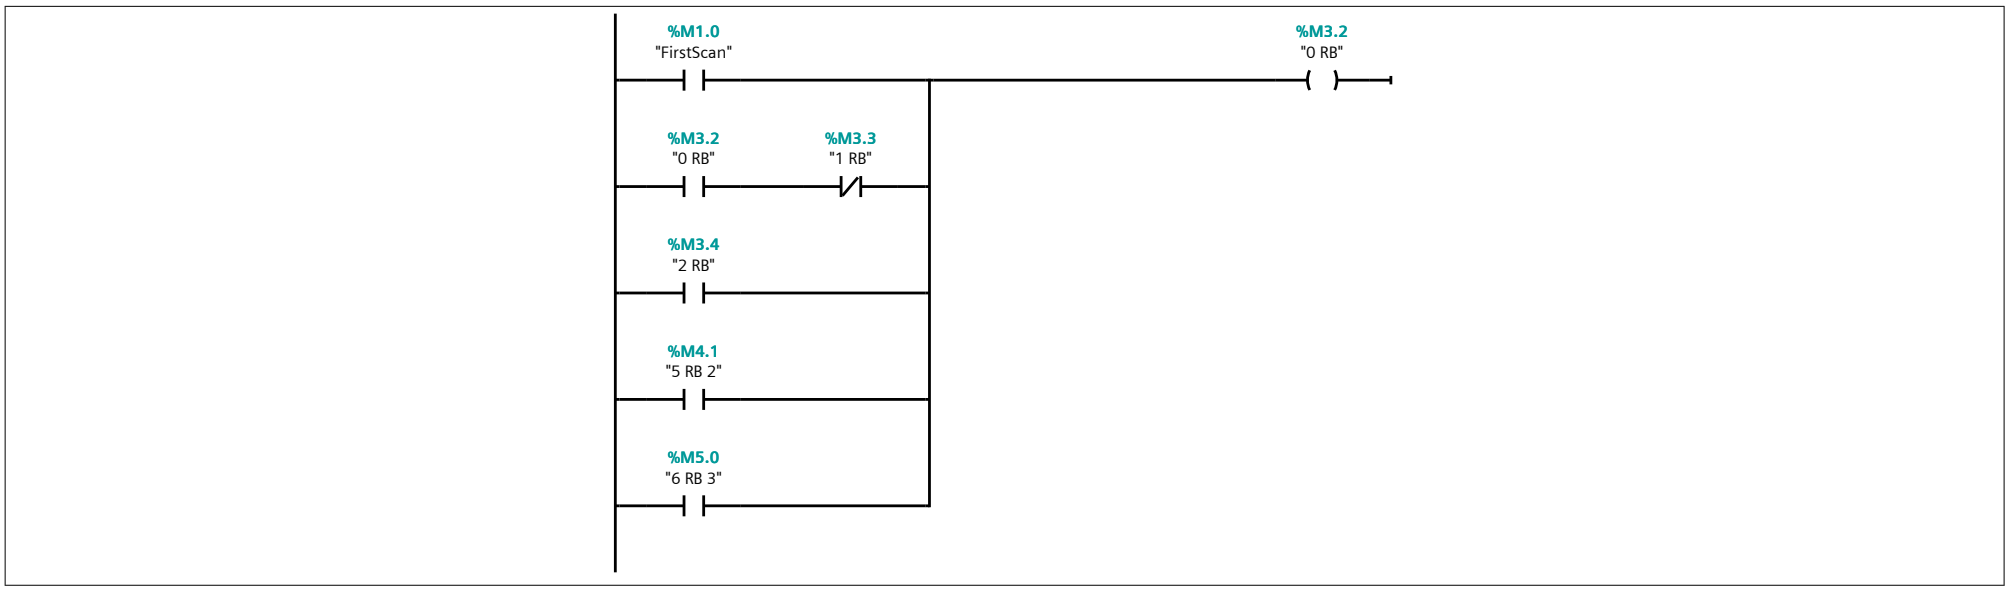


Network 2:

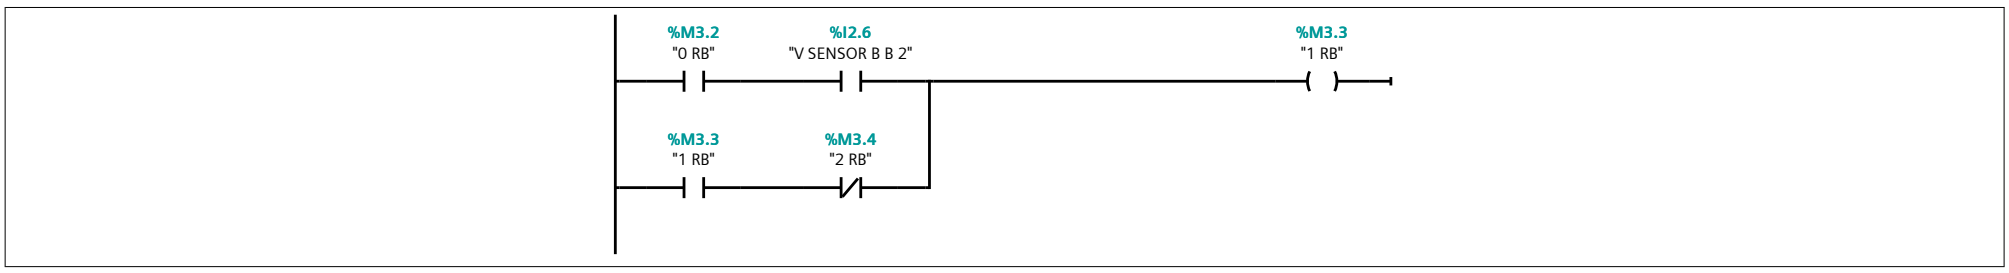


Network 3:

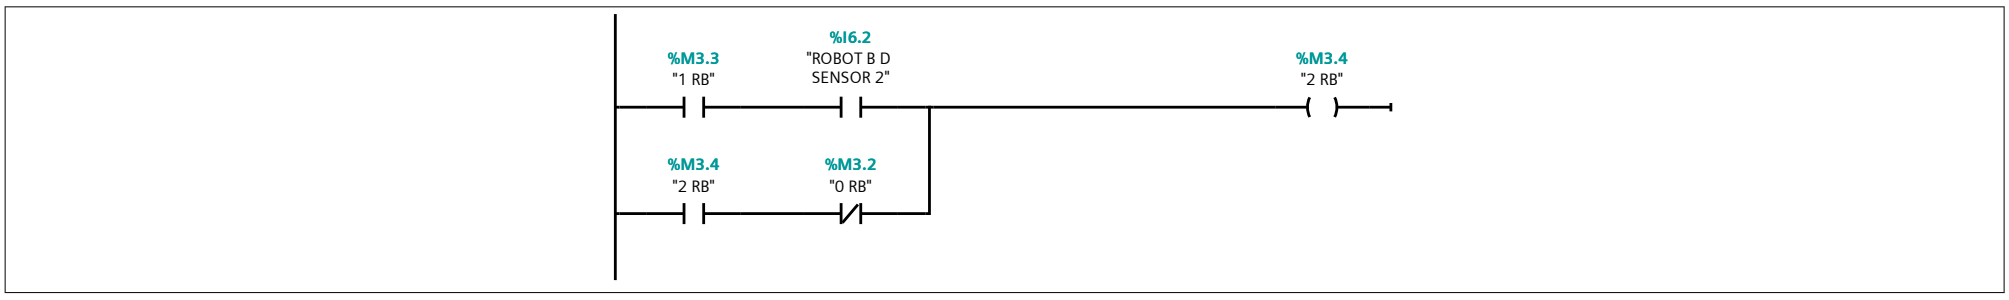


Network 4:

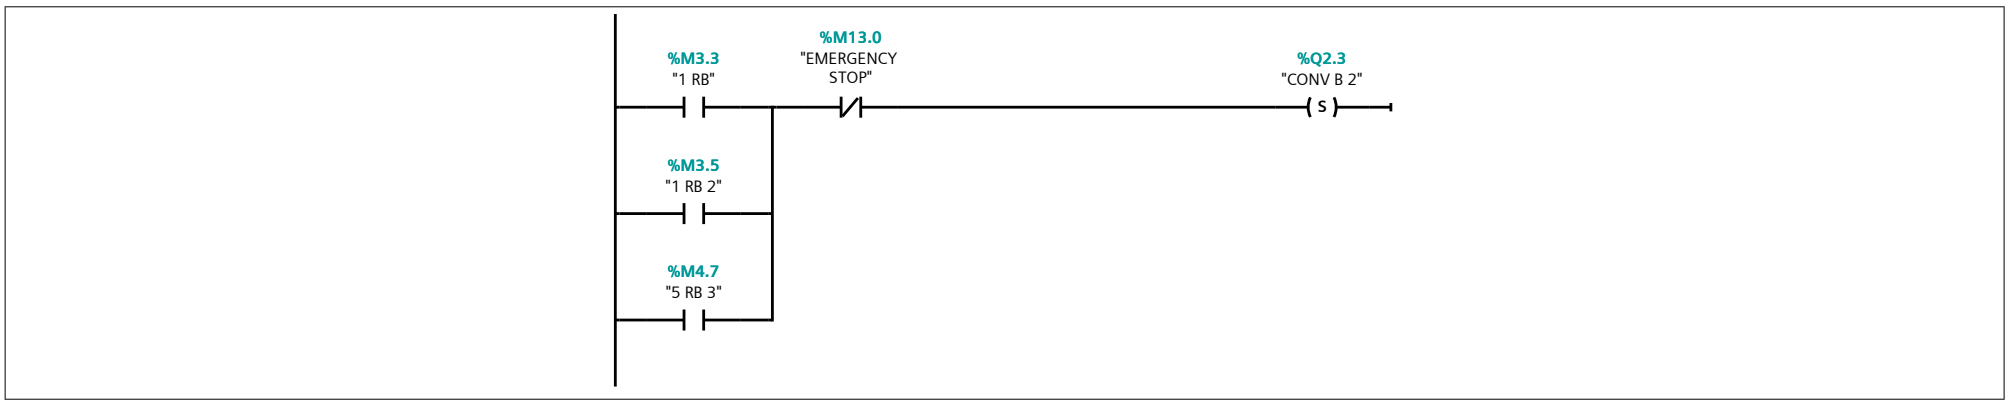


Network 5:

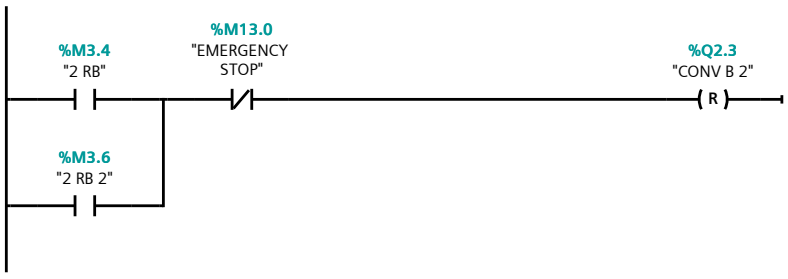


Network 6:

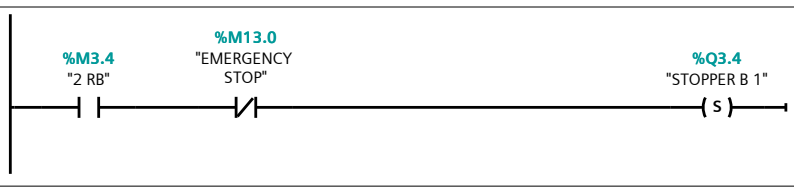


Network 7:

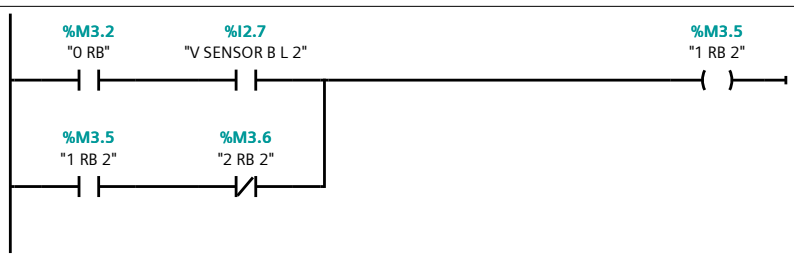


Network 8:

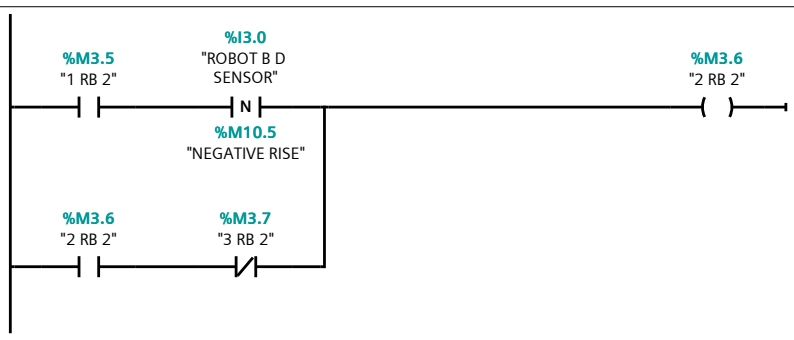


Network 9:

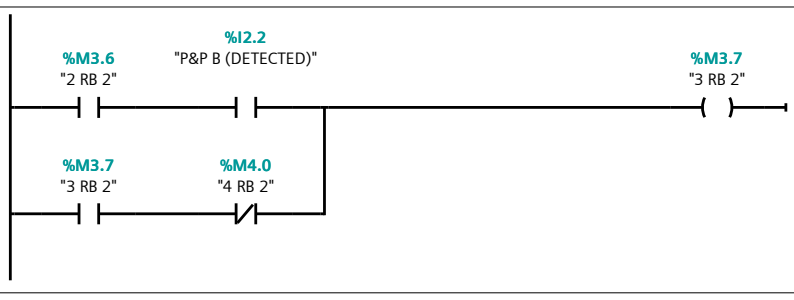


Network 10:

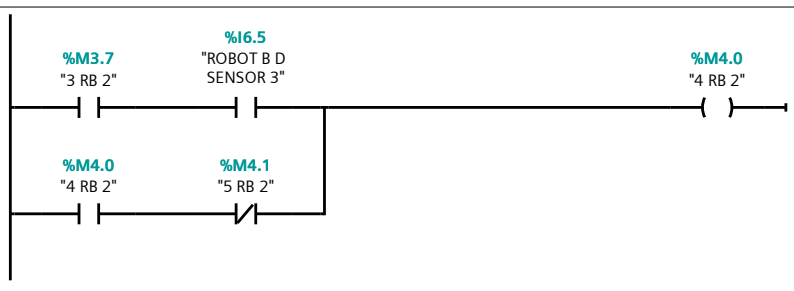


Network 11:

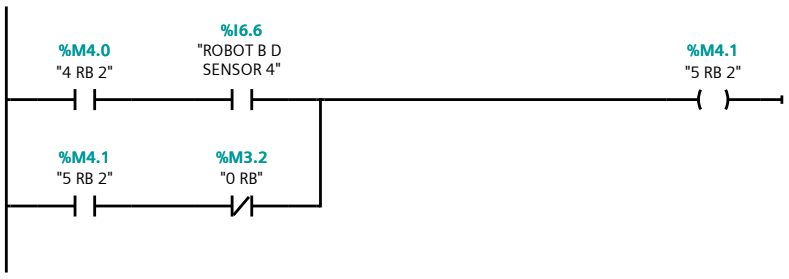


Network 12:

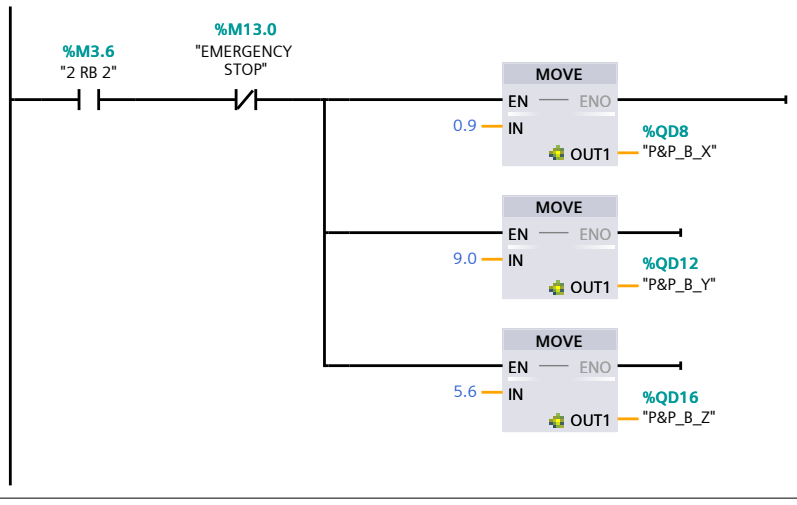


Network 13:

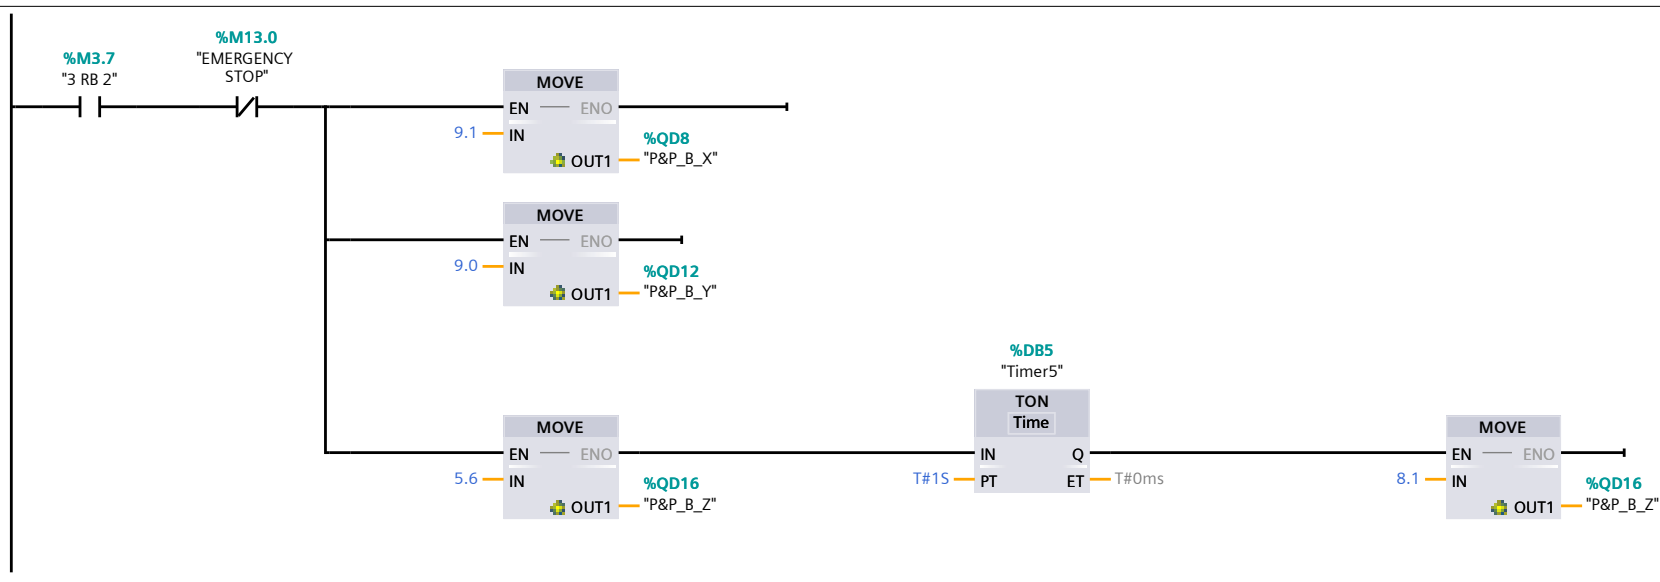


Network 14:

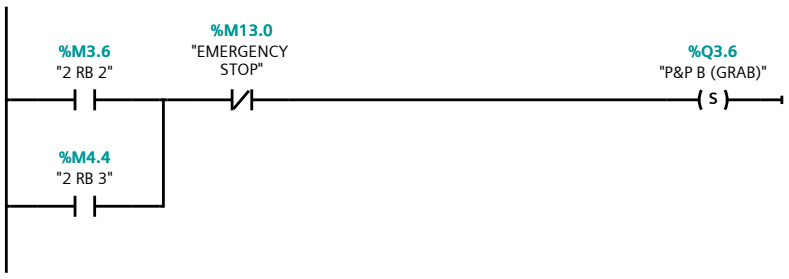


Network 15:

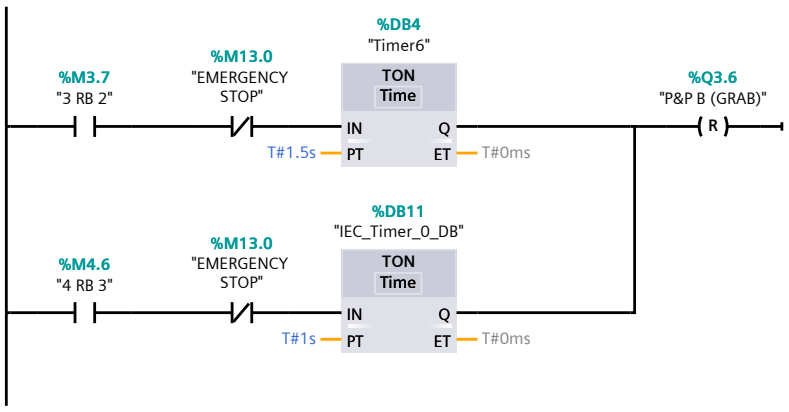


Network 16:

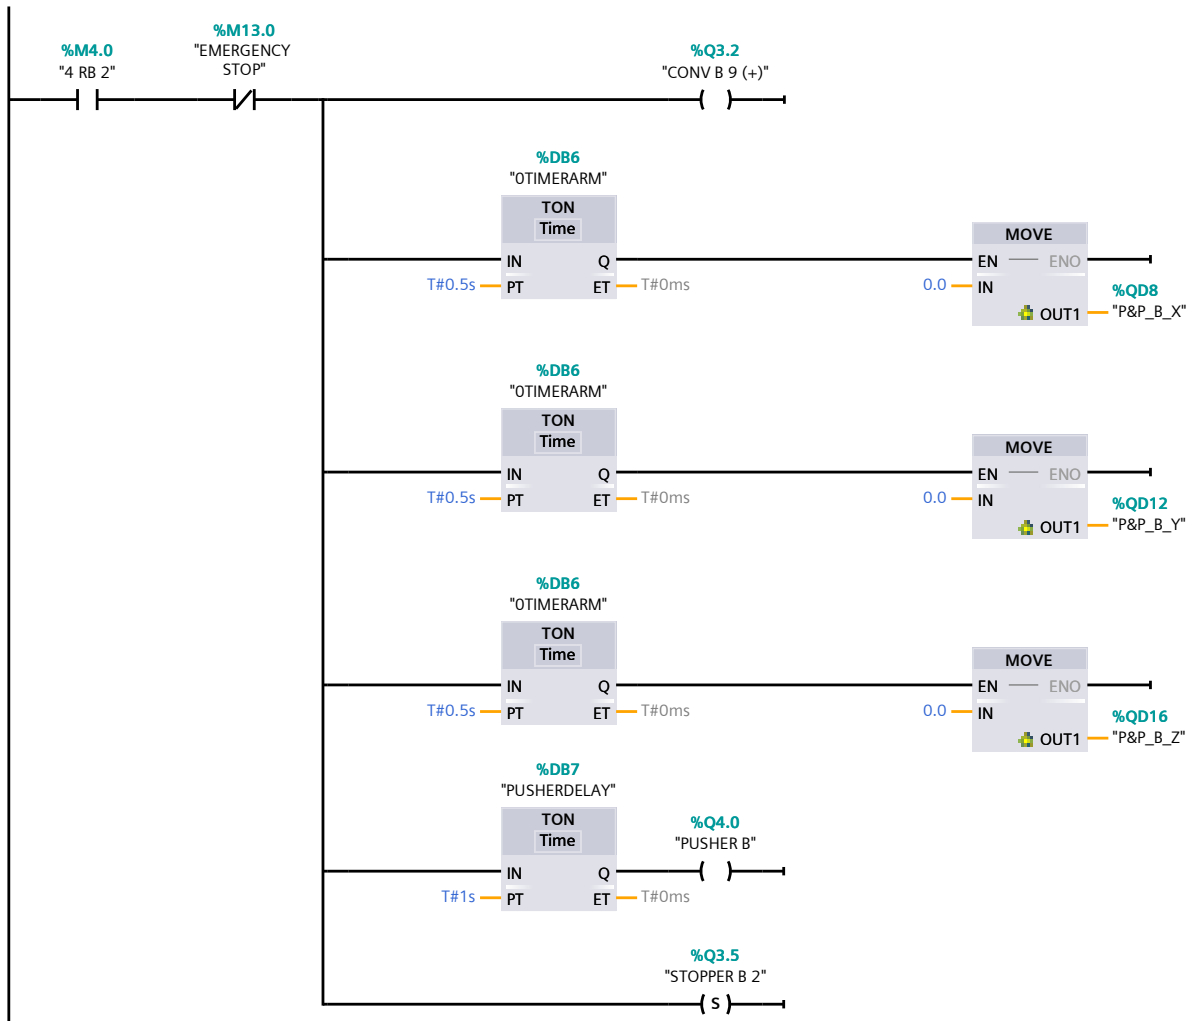


Network 17:

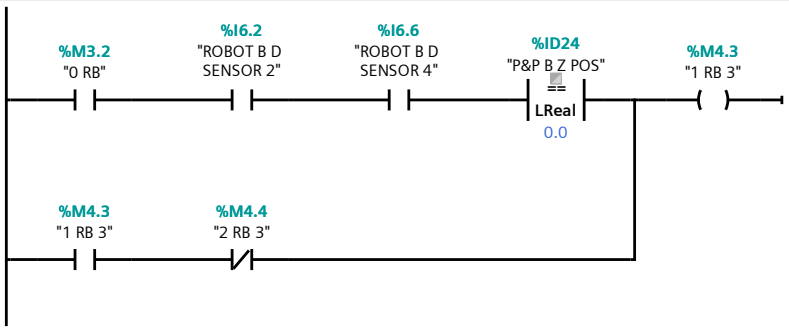


Network 18:

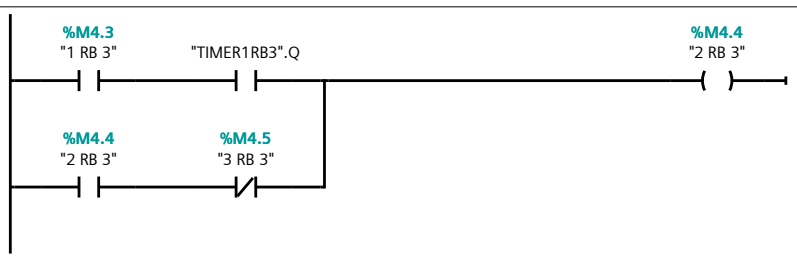


Network 19:

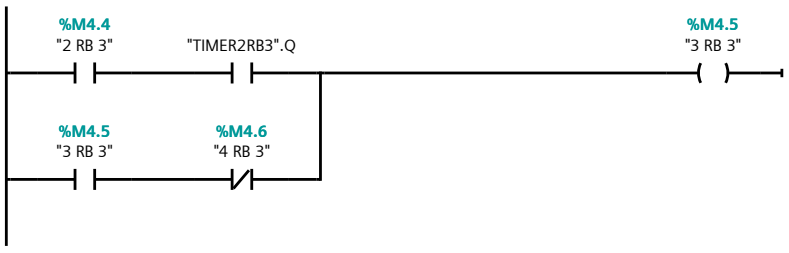


Network 20:

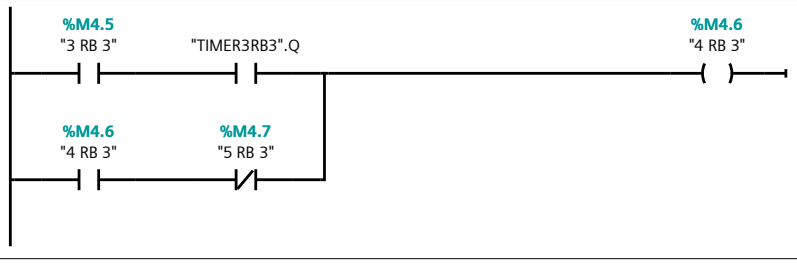


Network 21:

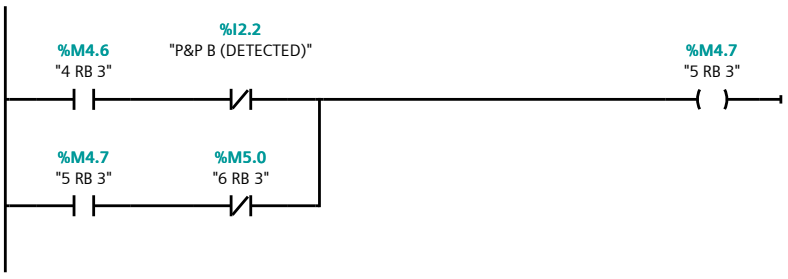


Network 22:

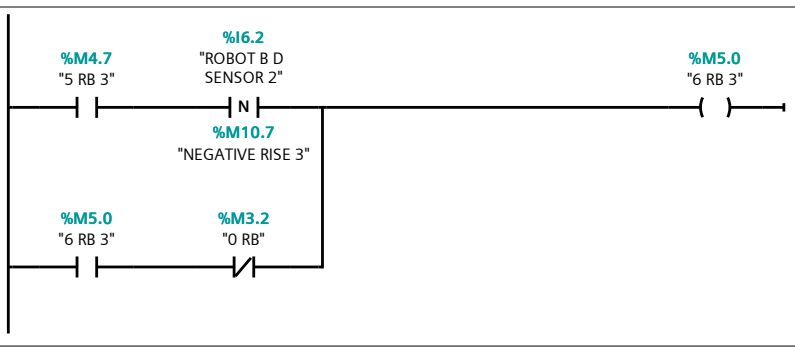


Network 23:

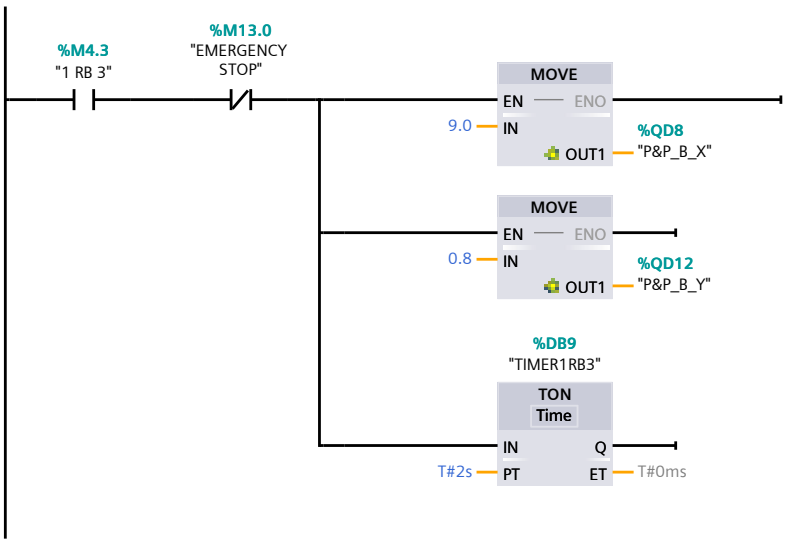


Network 24:

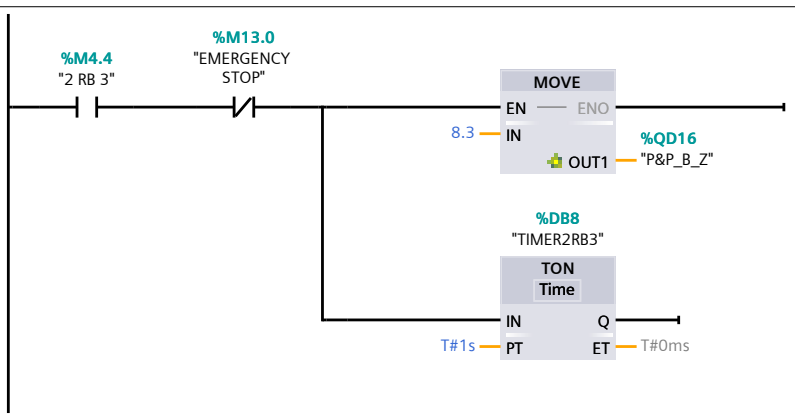


Network 25:

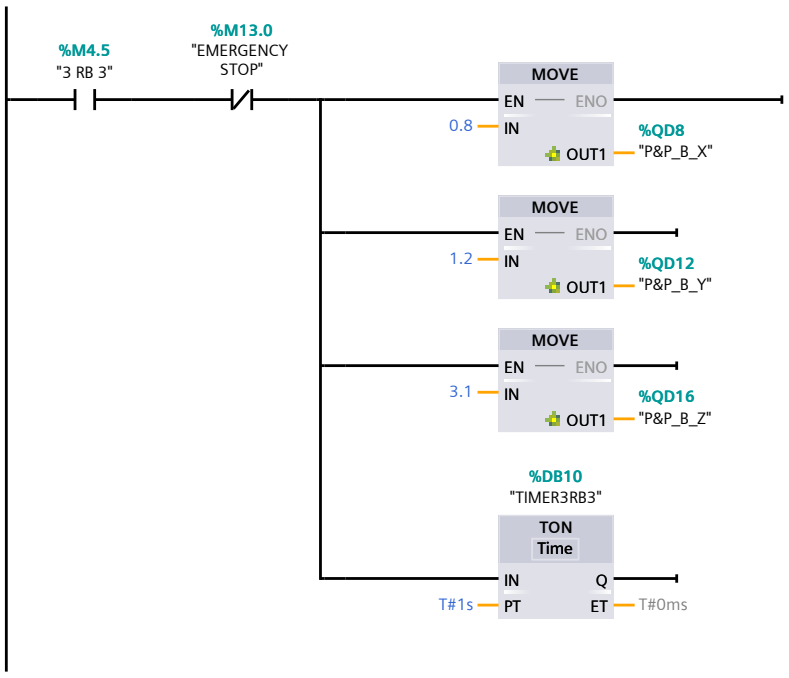


Network 26:

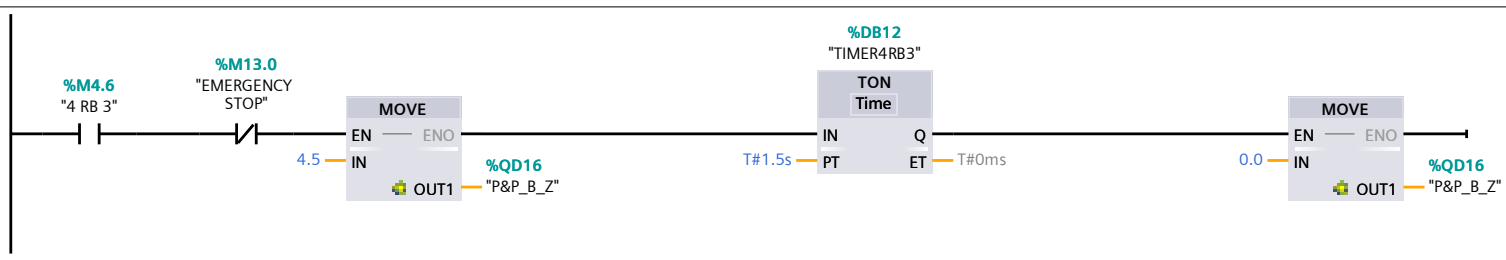


Network 27:

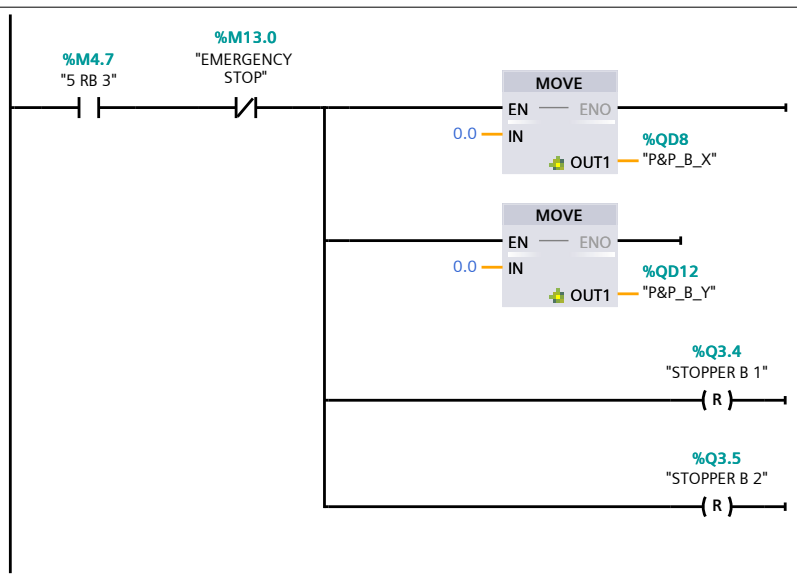


Network 28:

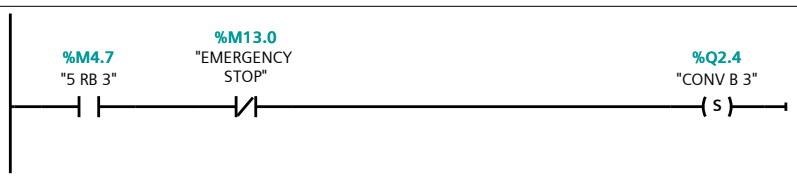


Network 29:

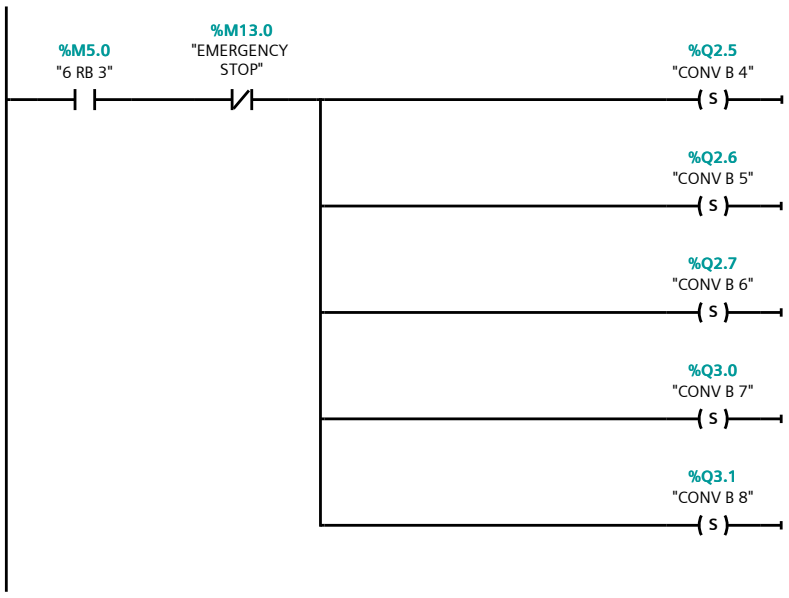

Network 30:

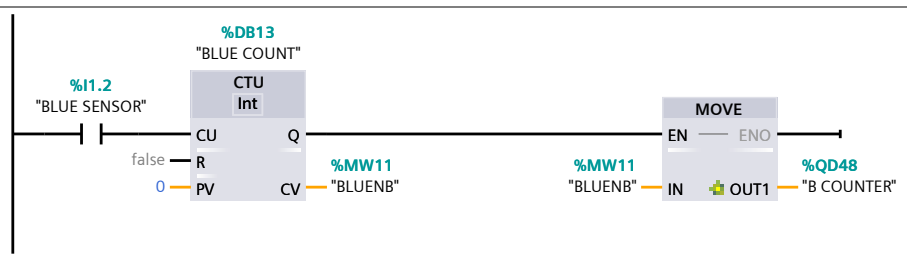

Network 31:

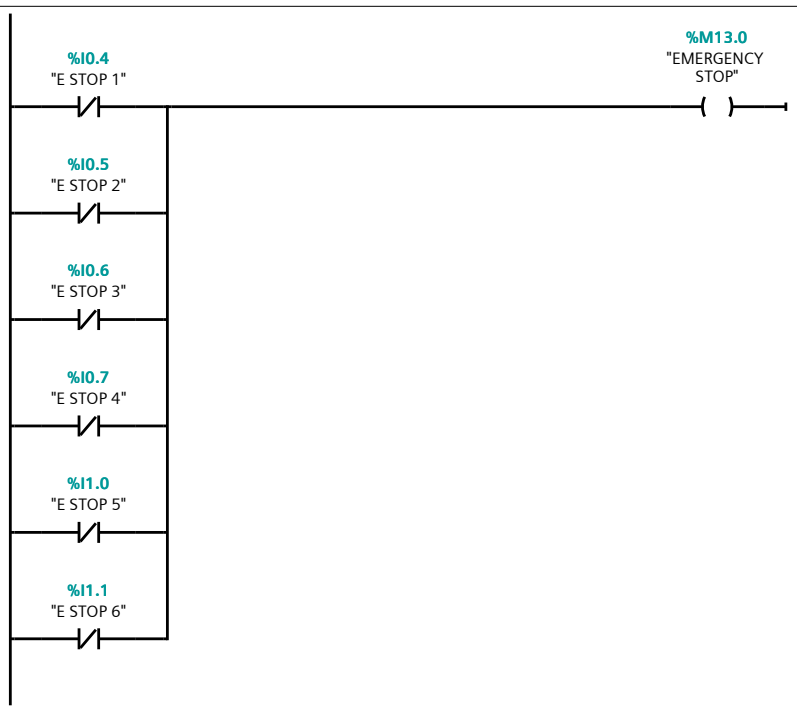

LIA_DISCRETE_DONE / PLC_1 [CPU 1211C DC/DC/DC] / Program blocks


CONTROL [OB124]

CONTROL Properties							
General							
Name	CONTROL	**Number**	124	**Type**	OB	**Language**	LAD
Numbering	Automatic						
Information							
Title	"Main Program Sweep (Cycle)"	**Author**		**Comment**		**Family**	
Version	0.1	**User-defined ID**					


Name	Data type	Default value	Comment
Input			
Initial_Call	Bool		Initial call of this OB
Remanence	Bool		=True, if remanent data are available
Temp			
Constant			

Network 1:


ADD LAST STEP!!!

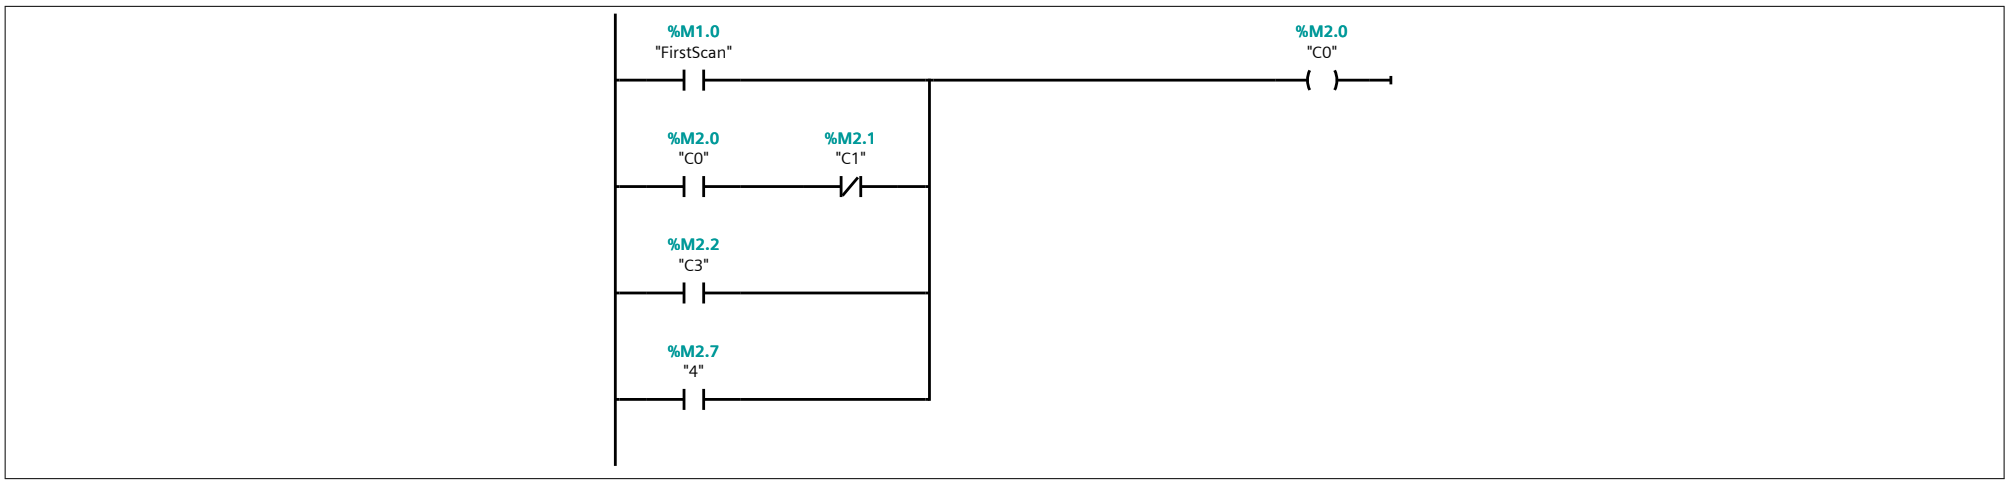


Network 2:

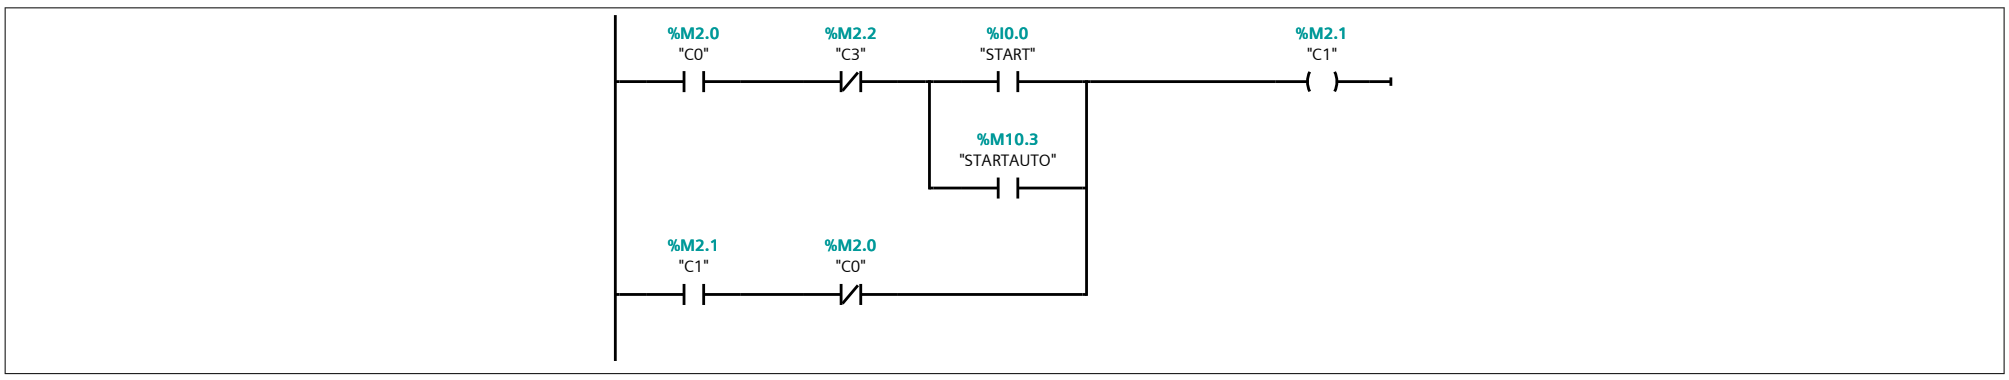


Network 3:

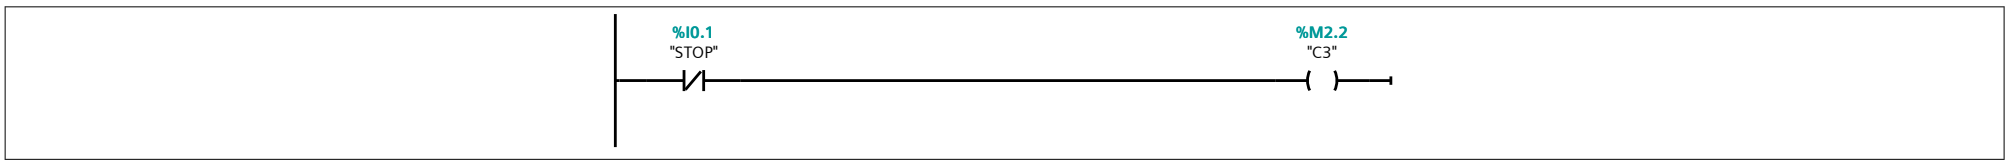


Network 4:

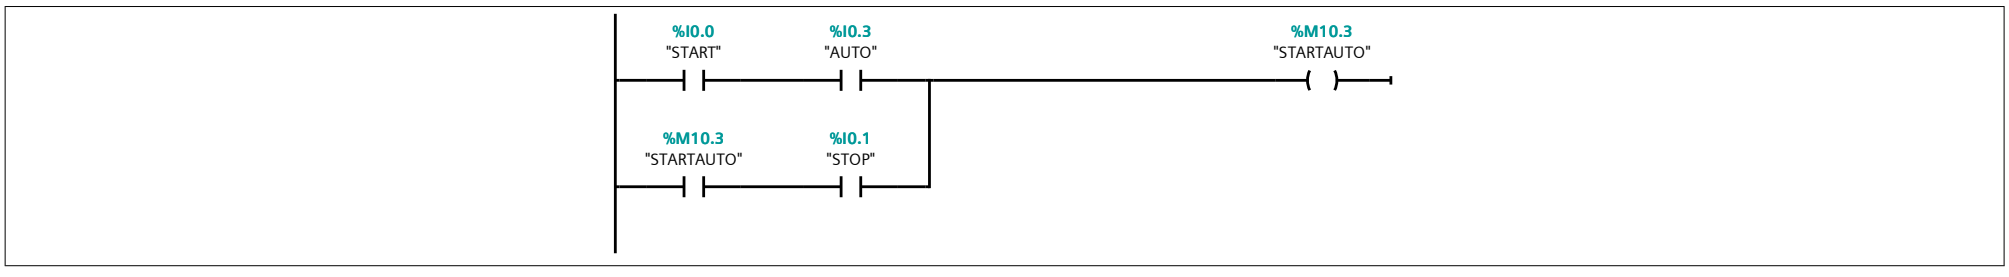


Network 5:

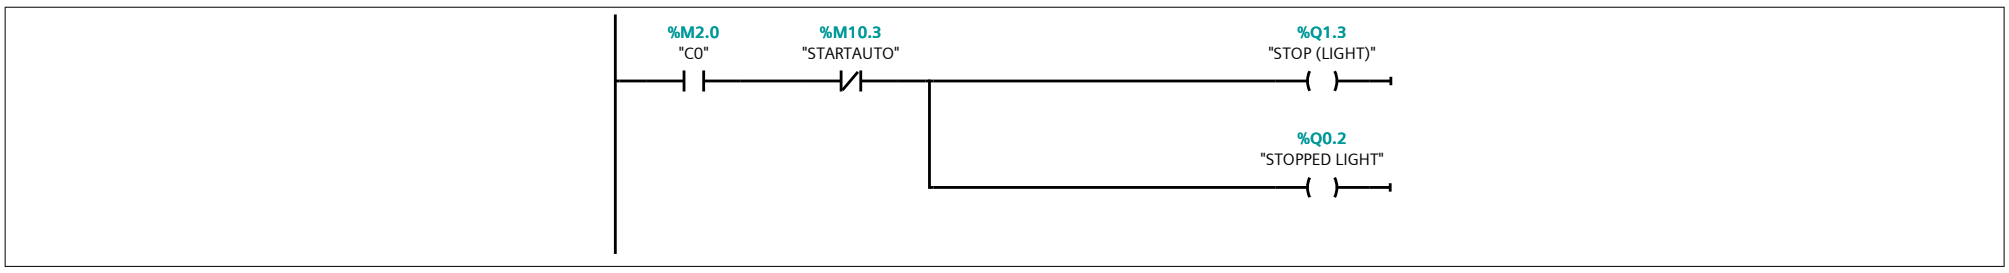


Network 6:

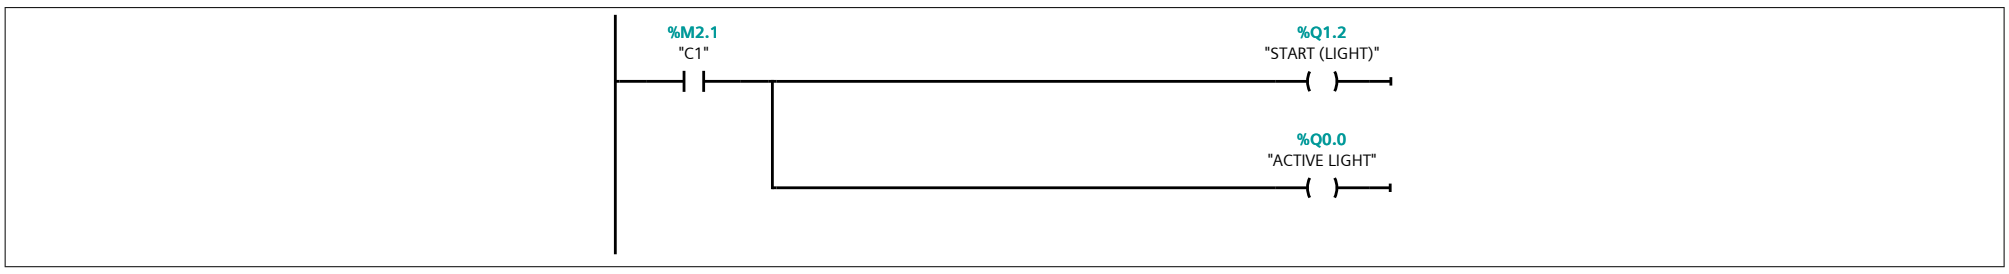


Network 7:

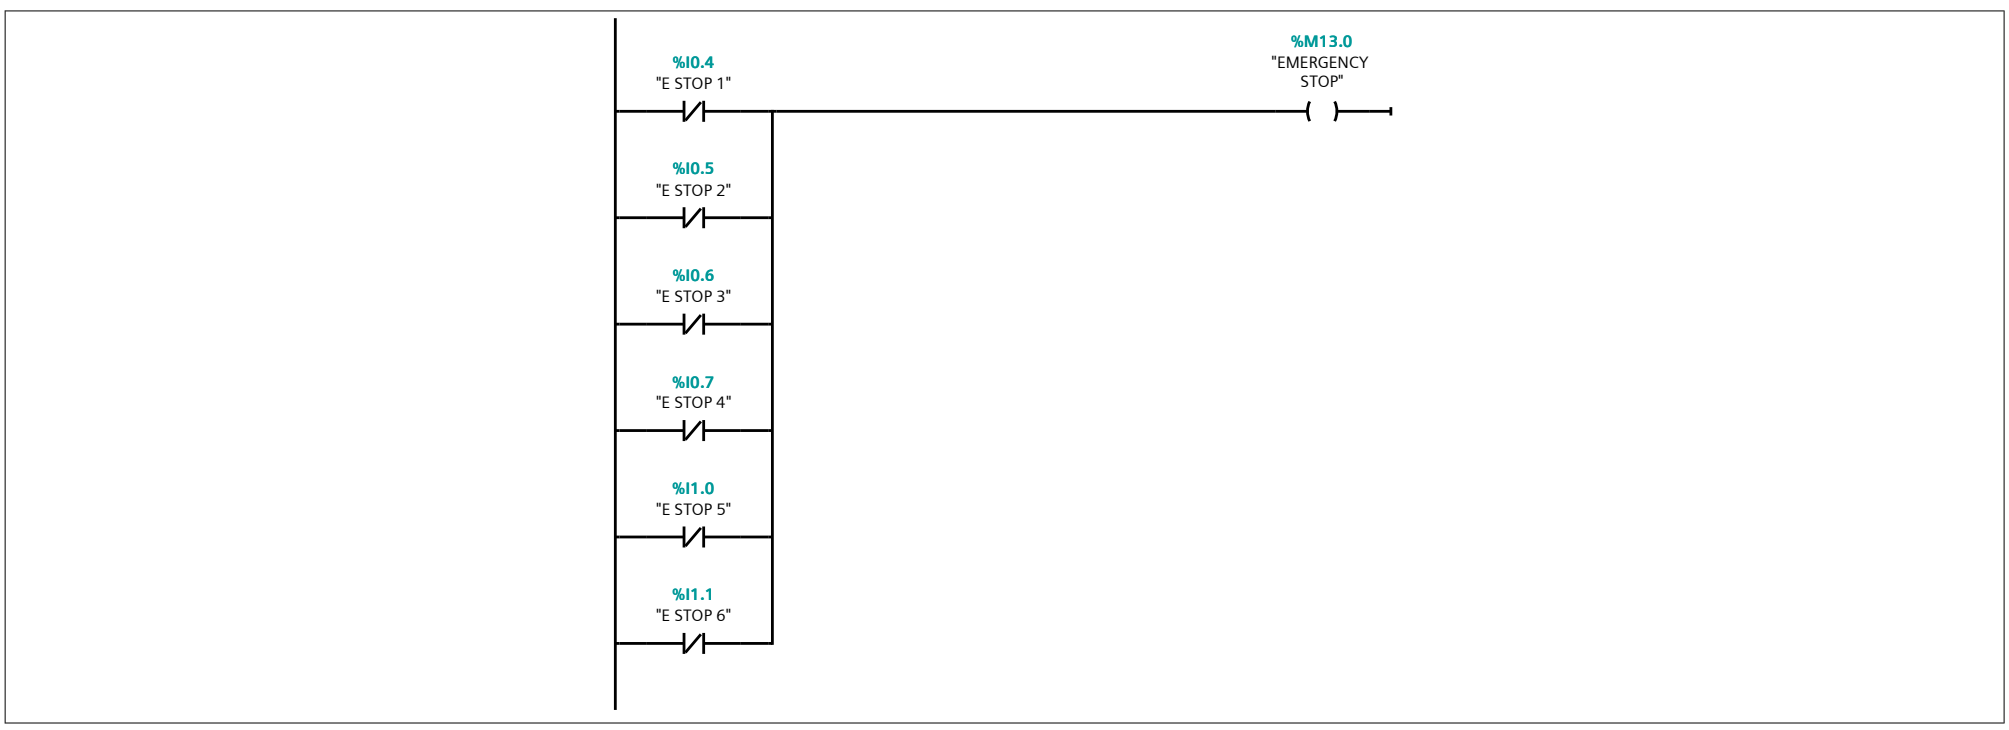

Network 8:

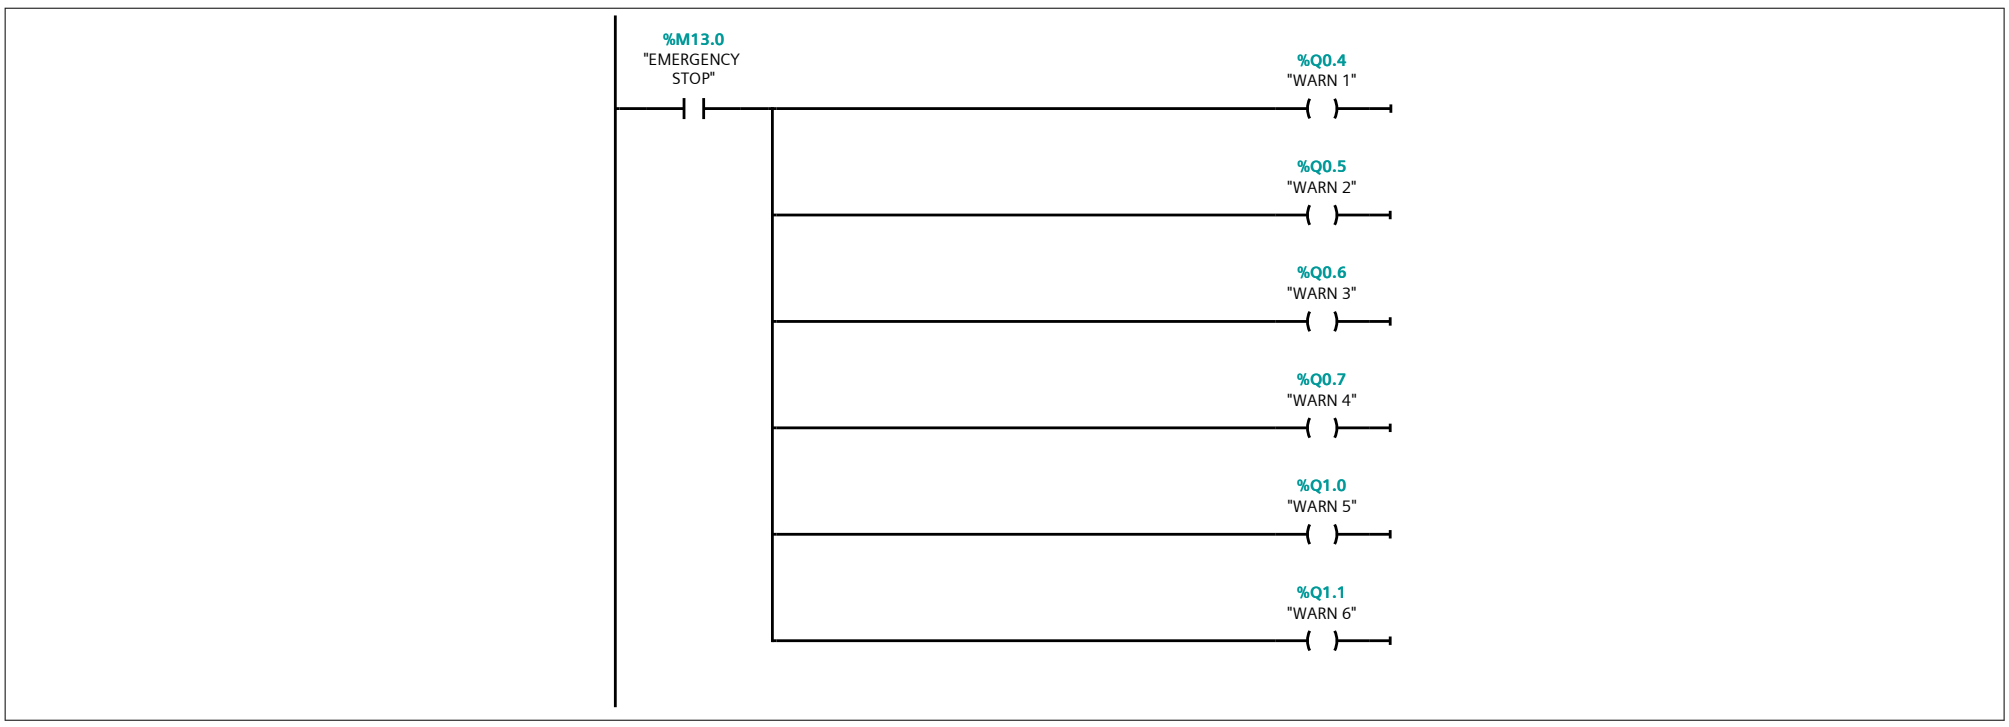

Network 9:

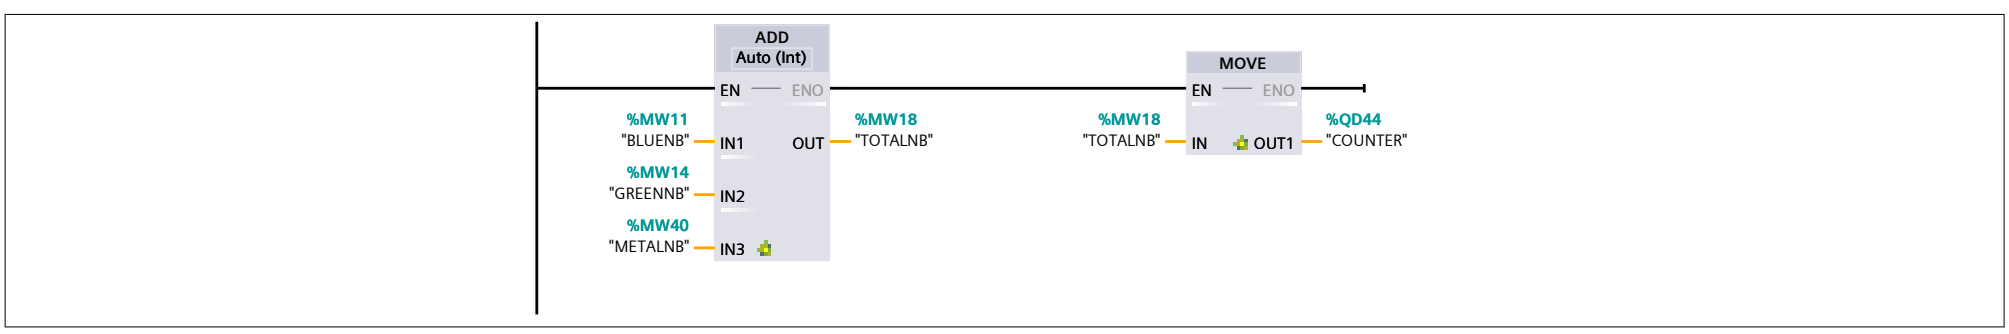

LIA_DISCRETE_DONE / PLC_1 [CPU 1211C DC/DC/DC] / Program blocks


ROBOT ARM METAL [OB126]

ROBOT ARM METAL Properties							
General							
Name	ROBOT ARM METAL	**Number**	126	**Type**	OB	**Language**	LAD
Numbering	Automatic						
Information							
Title	"Main Program Sweep (Cycle)"	**Author**		**Comment**		**Family**	
Version	0.1	**User-defined ID**					


Name	Data type	Default value	Comment
▼ Input			
Initial_Call	Bool		Initial call of this OB
Remanence	Bool		=True, if remanent data are available
Temp			
Constant			

Network 1:


If a base is detected

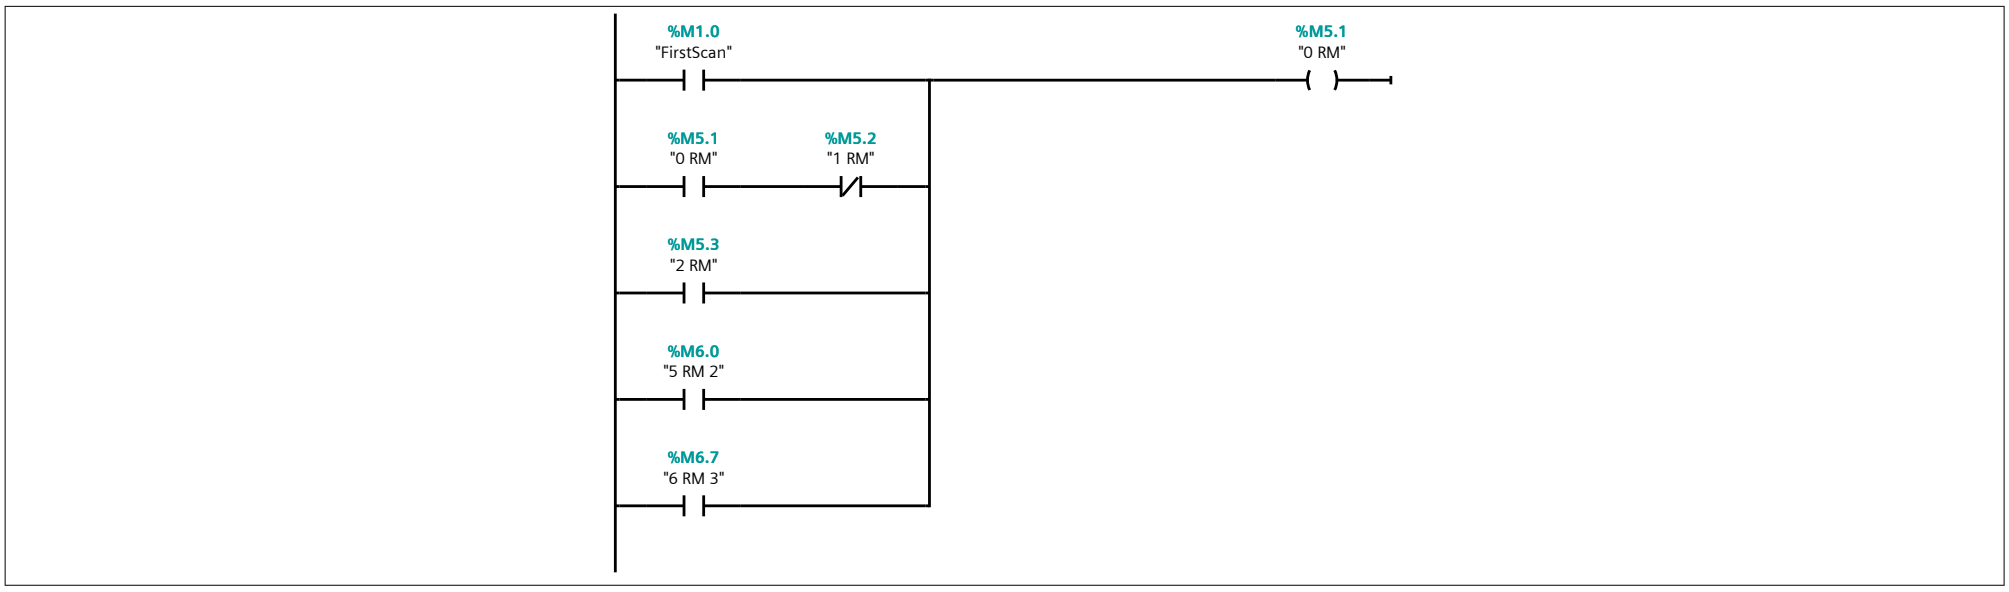


Network 2:

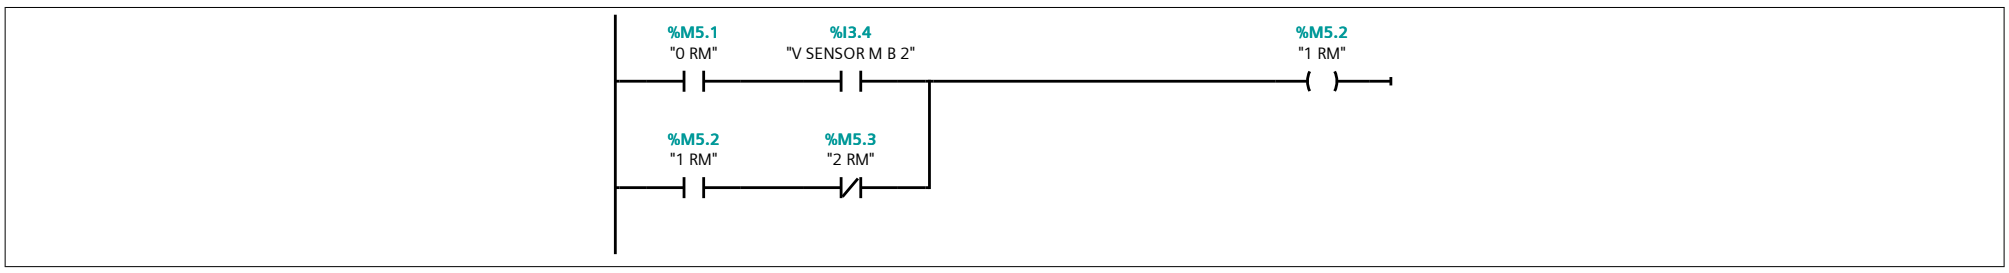


Network 3:

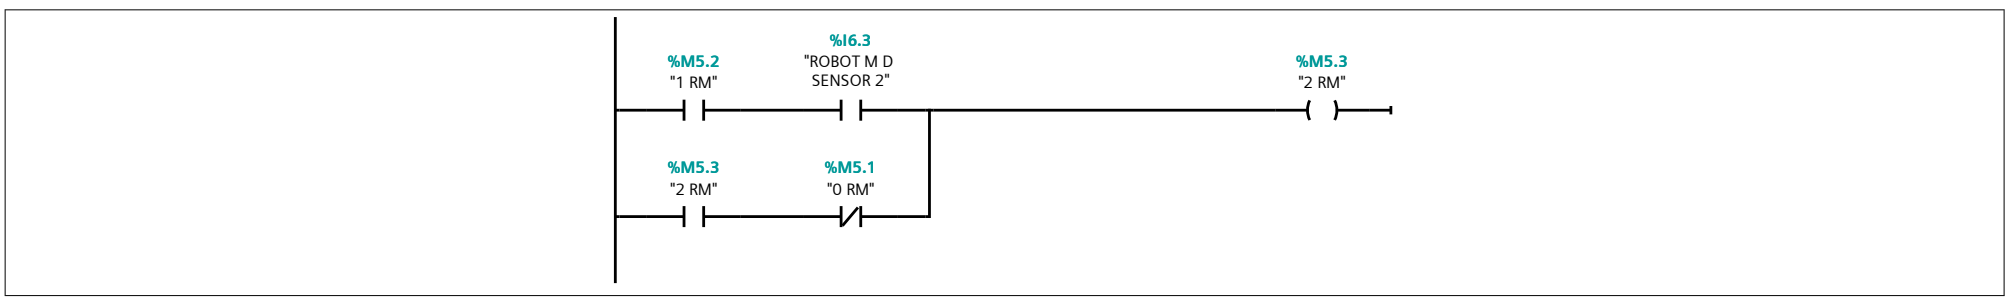


Network 4:

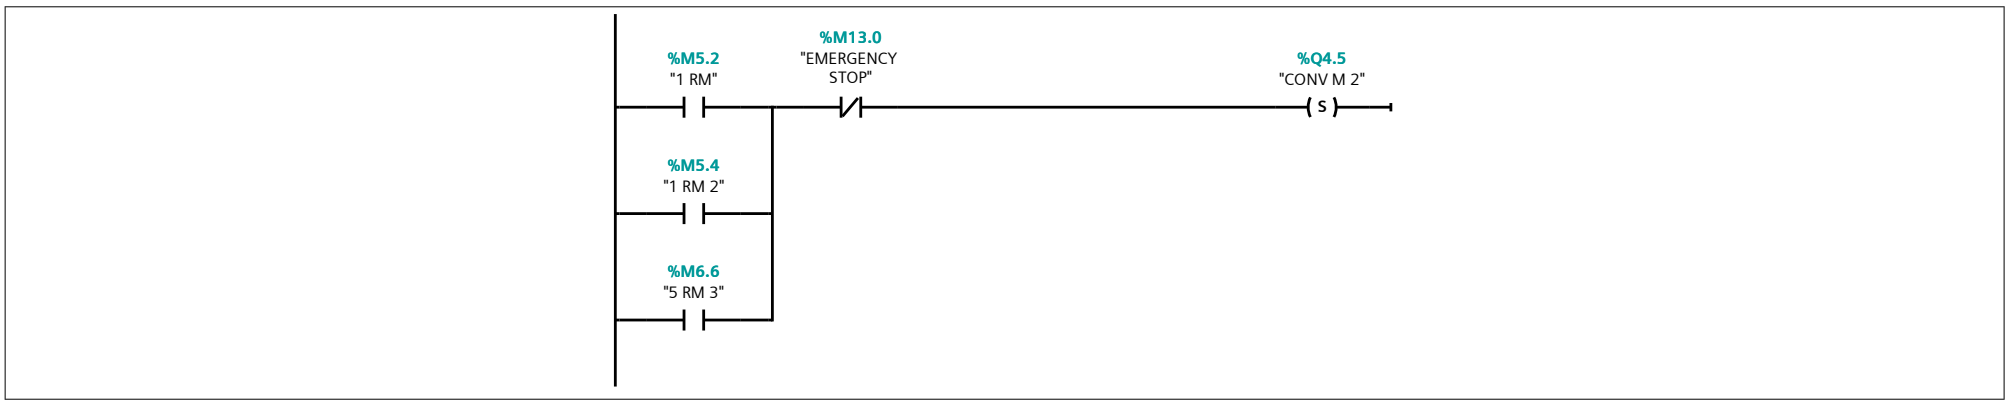


Network 5:

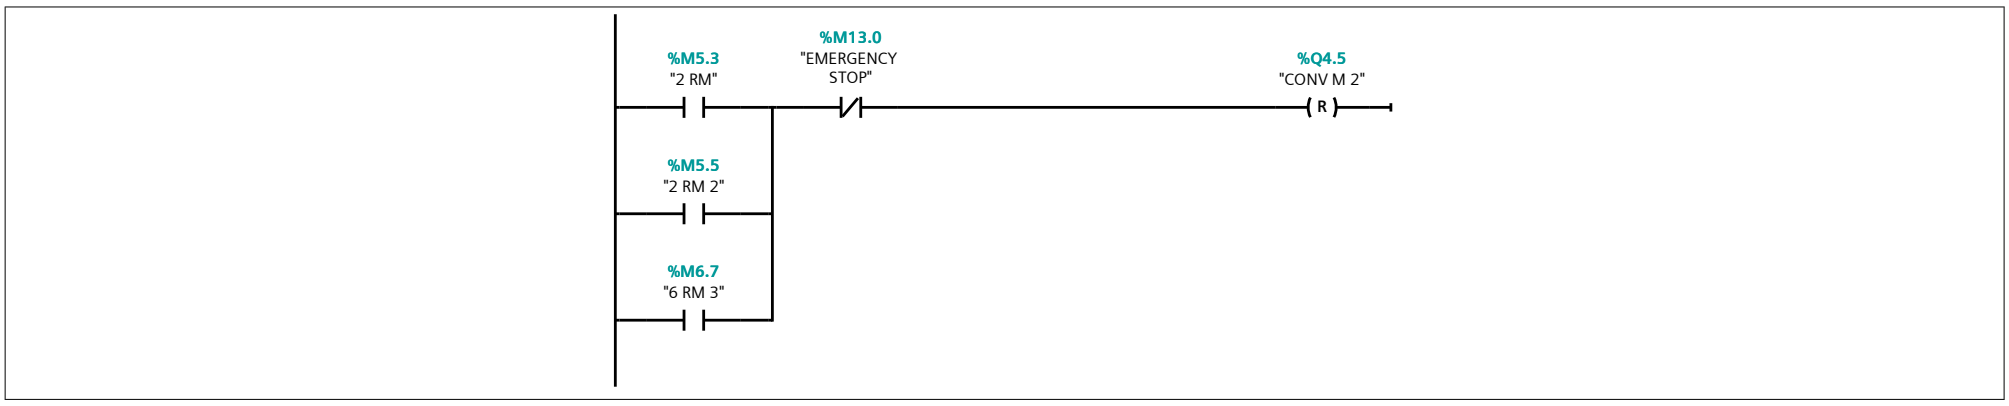


Network 6:

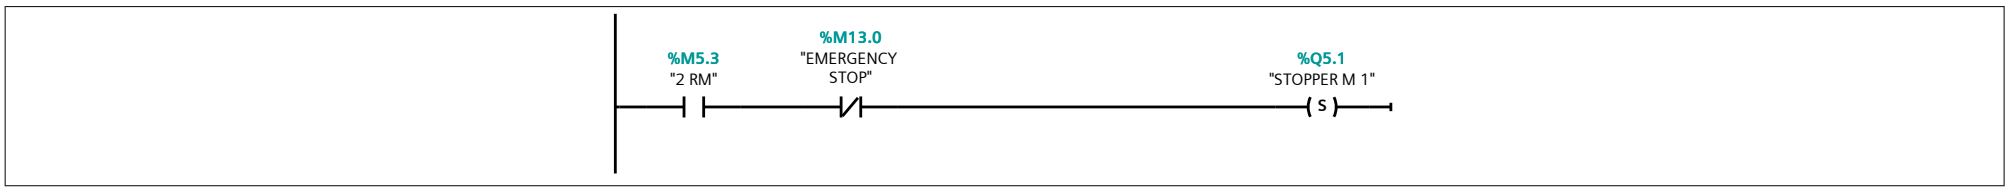


Network 7:

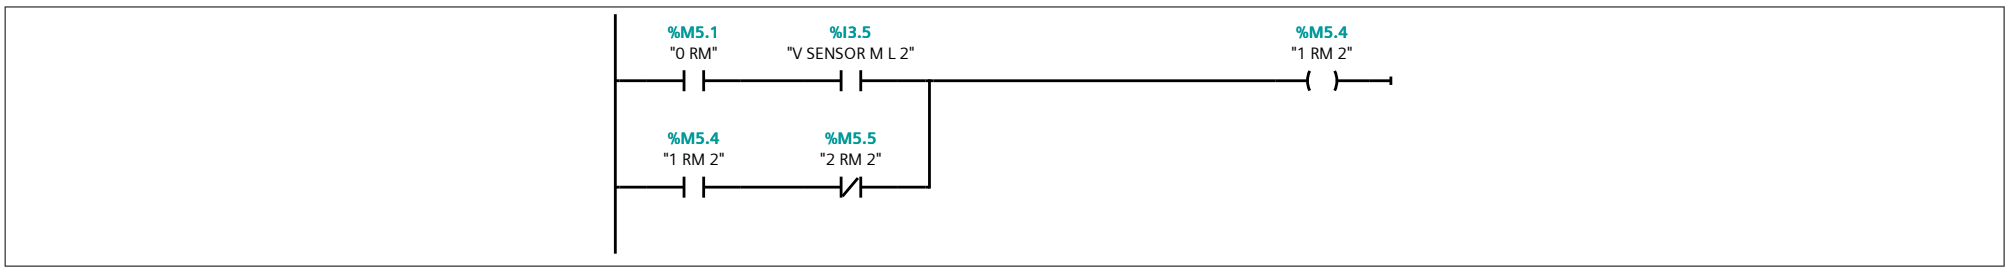


Network 8:

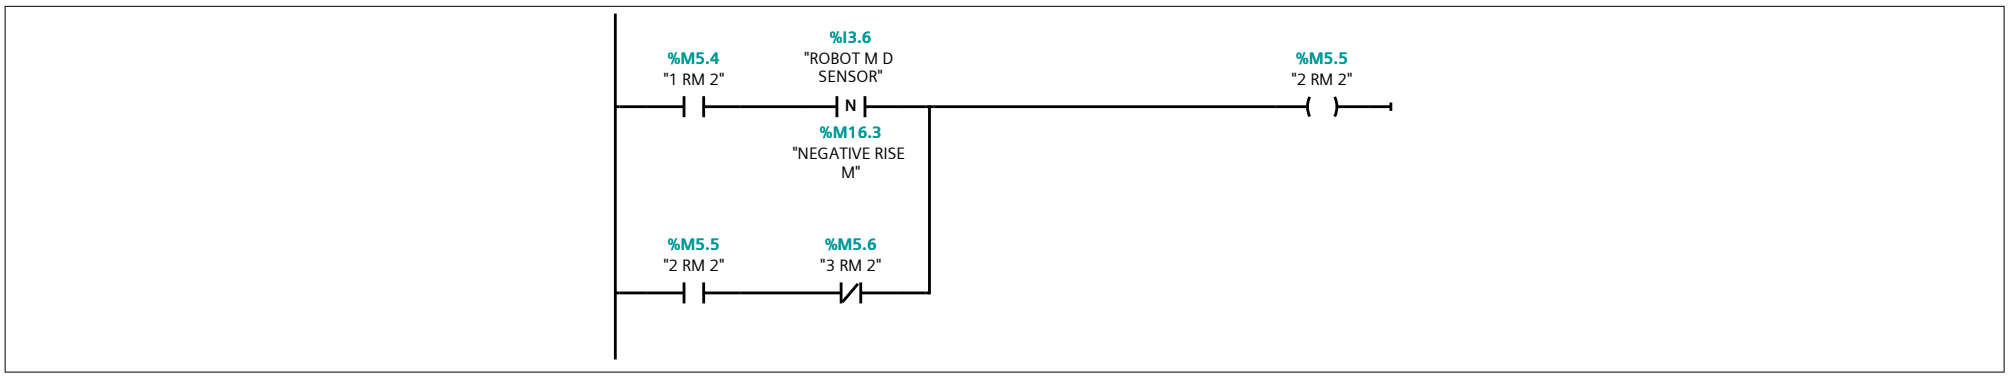

Network 9:

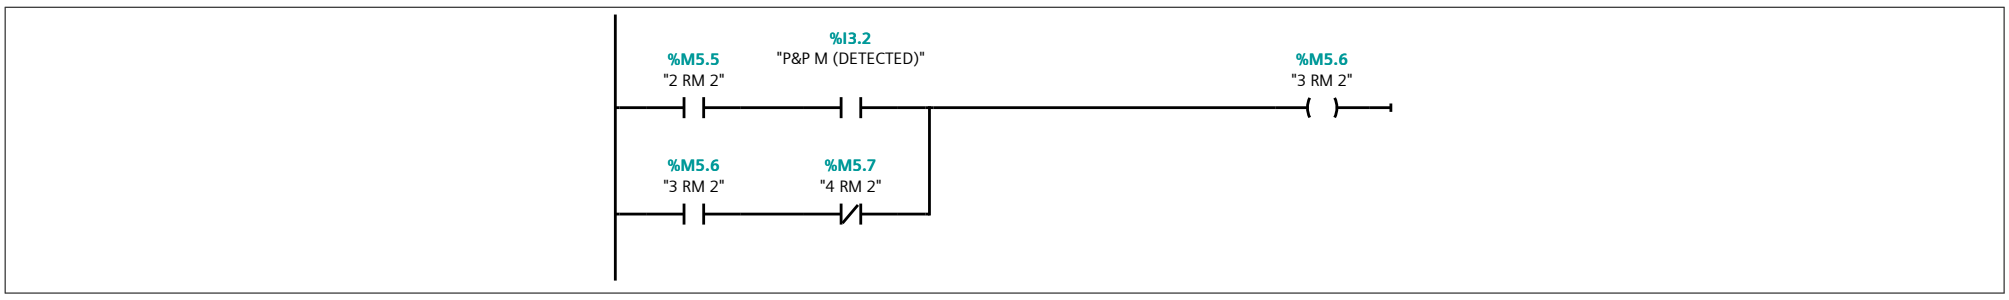


Network 10:

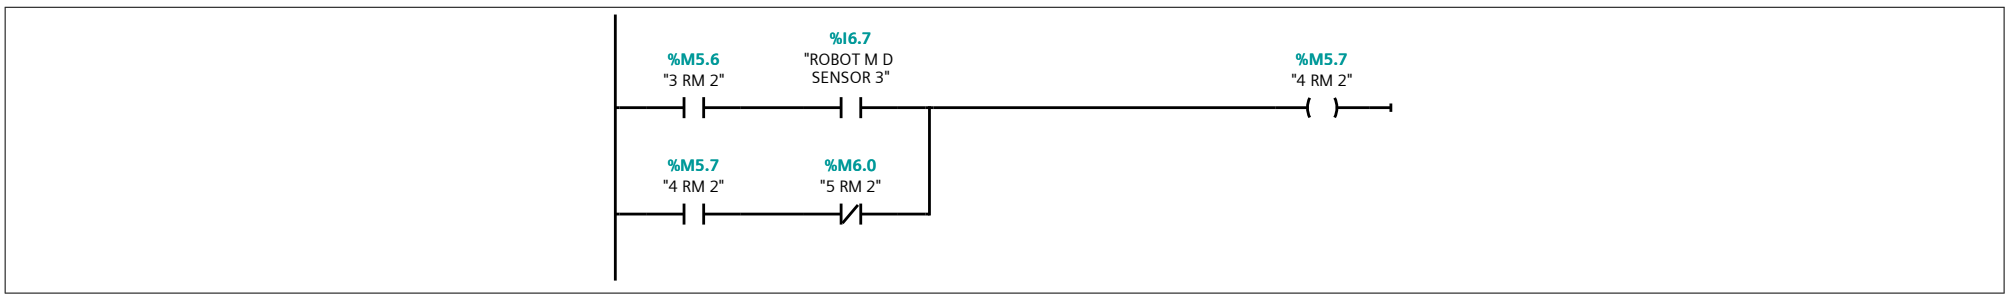


Network 11:




Network 12:

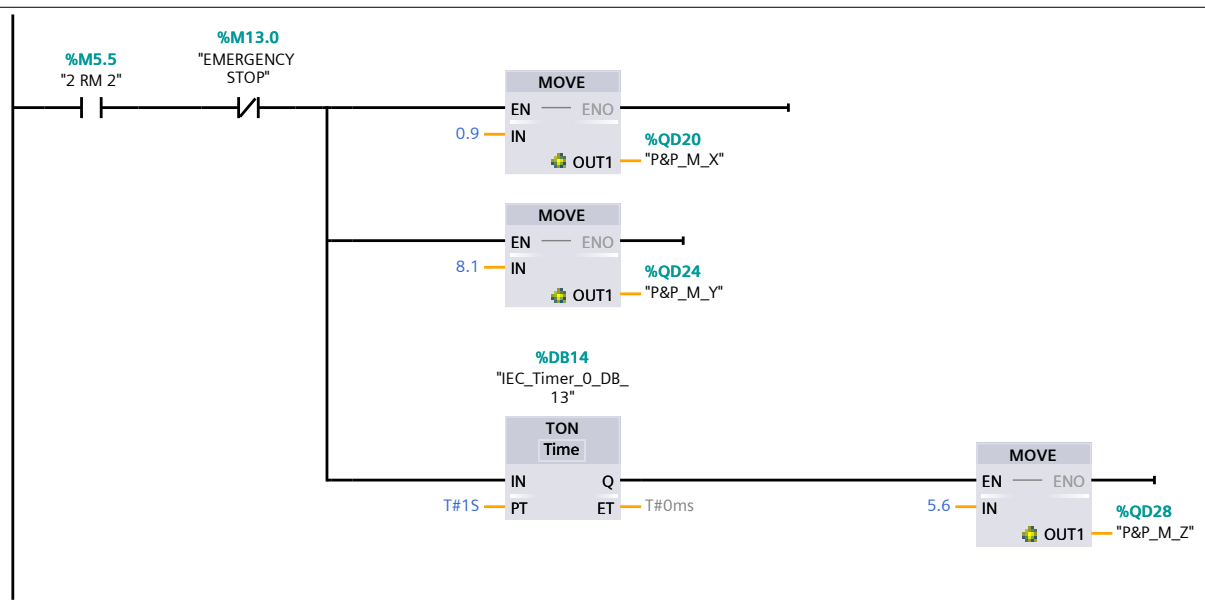


Network 13:

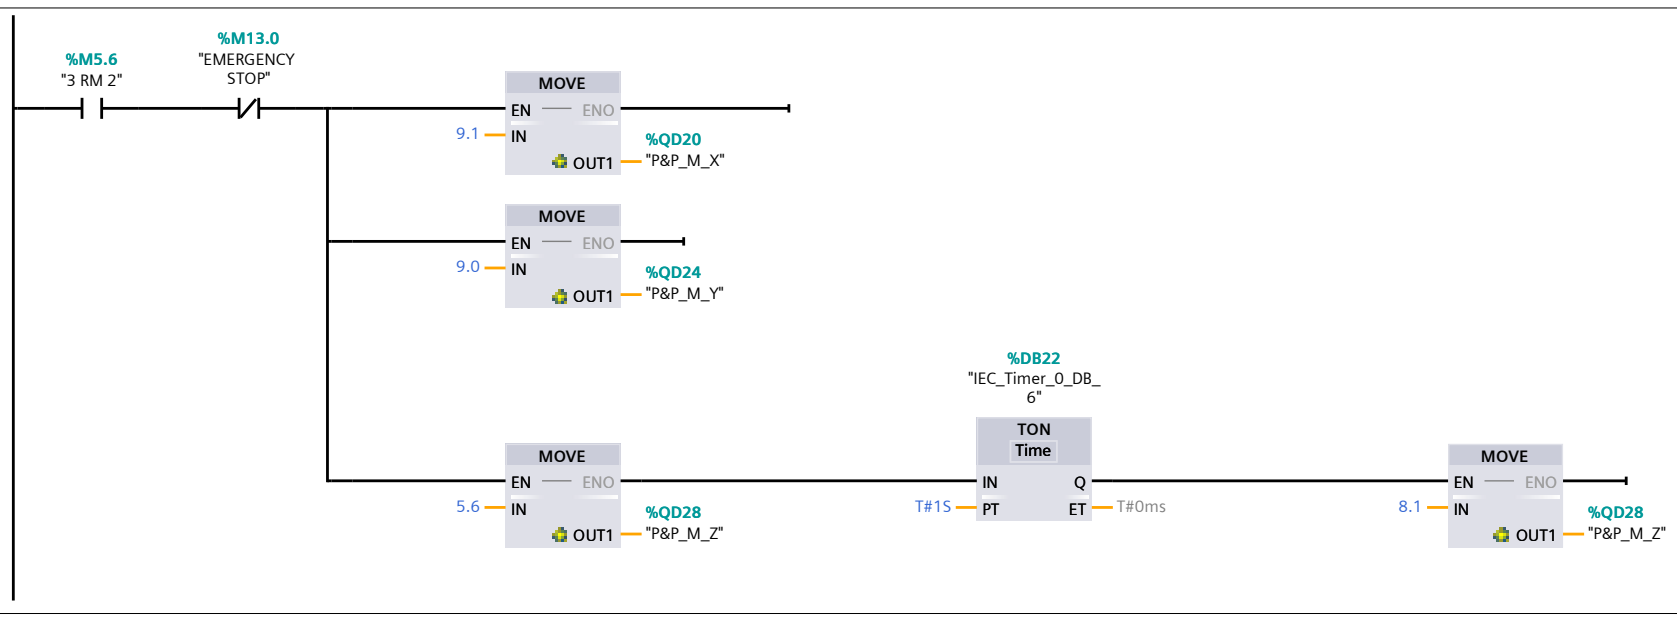


Network 14:

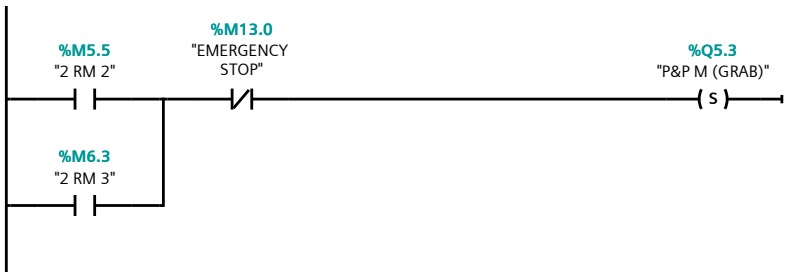


Network 15:

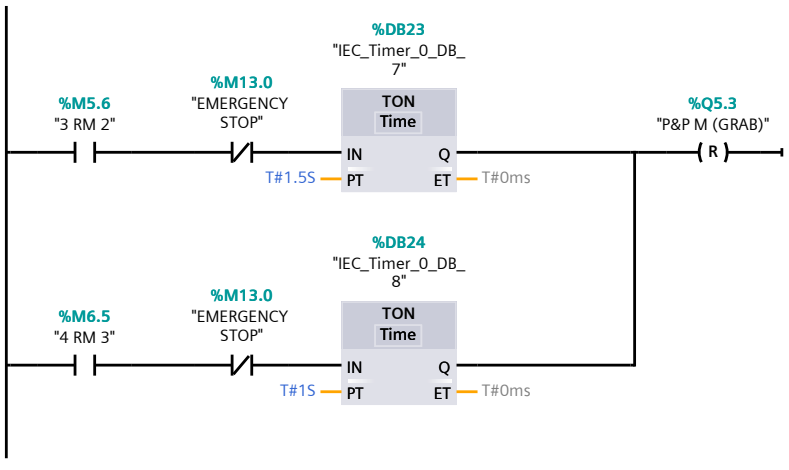


Network 16:

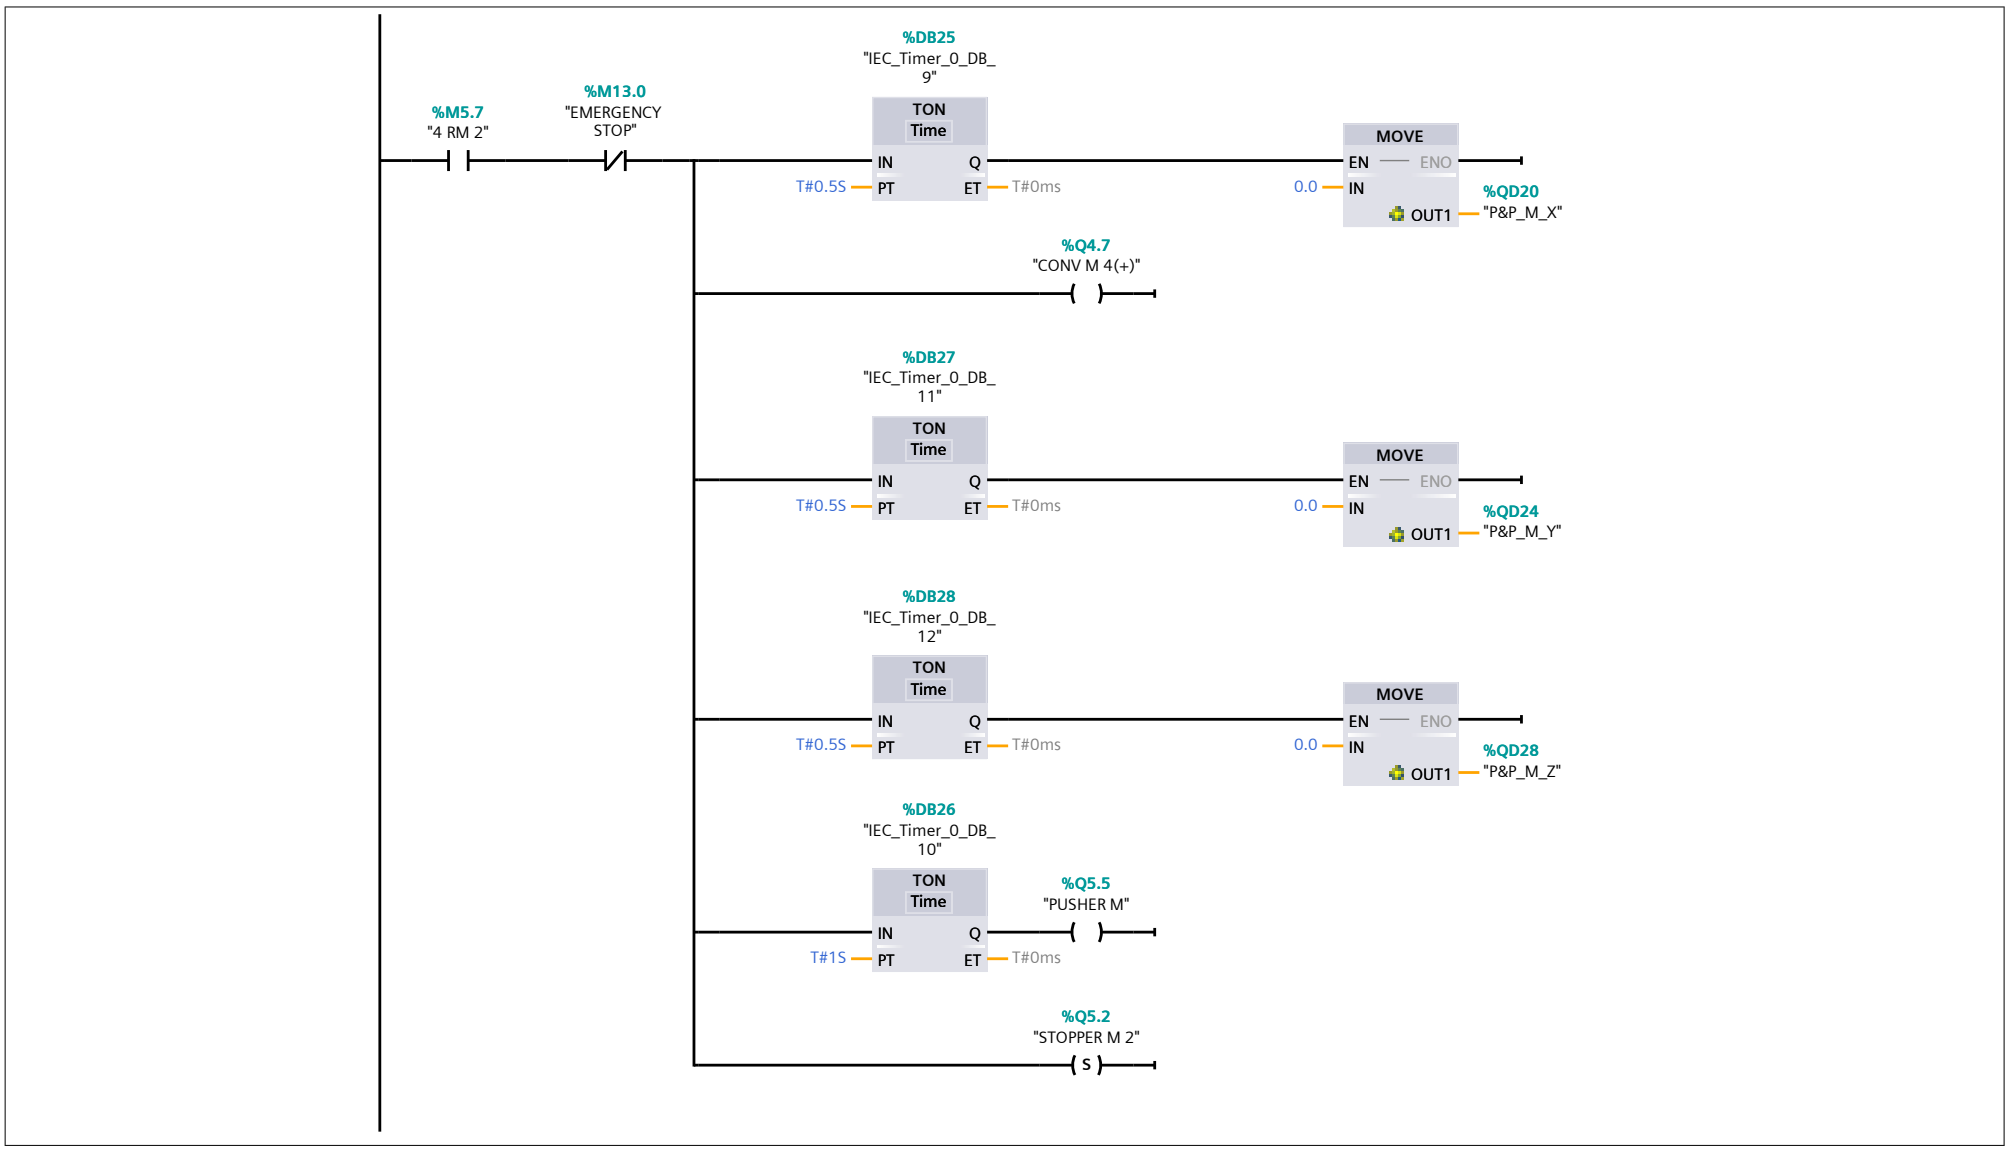


Network 17:

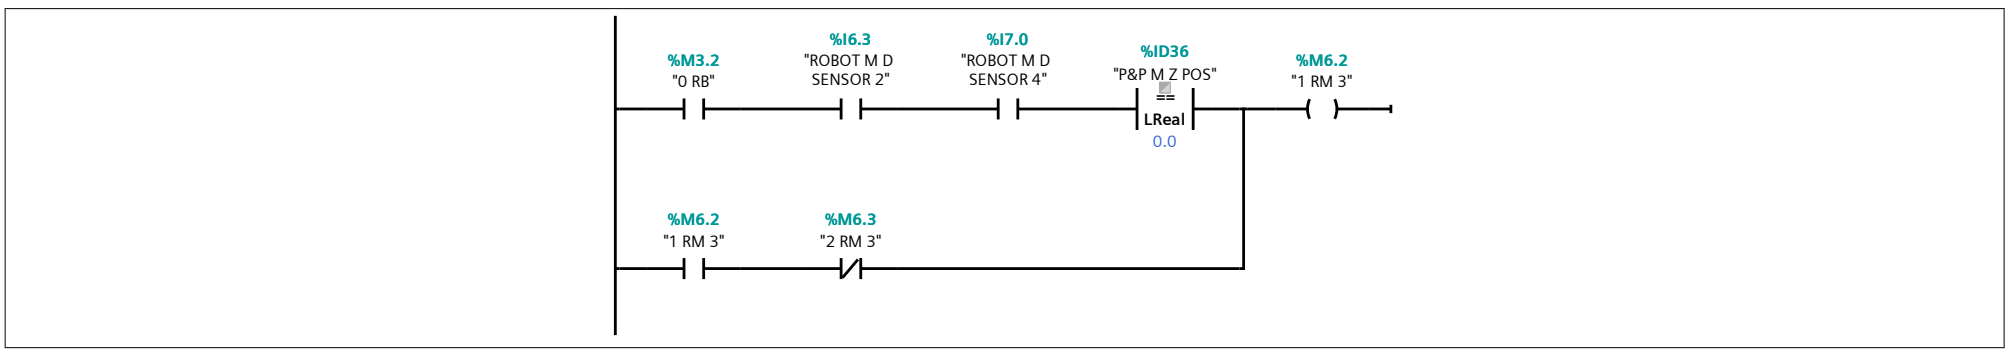


Network 18:

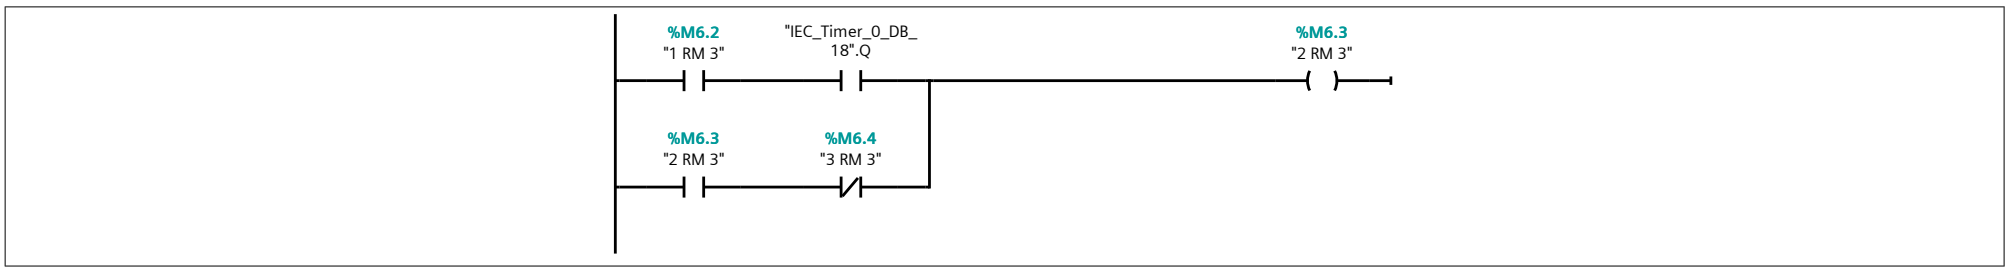


Network 19:

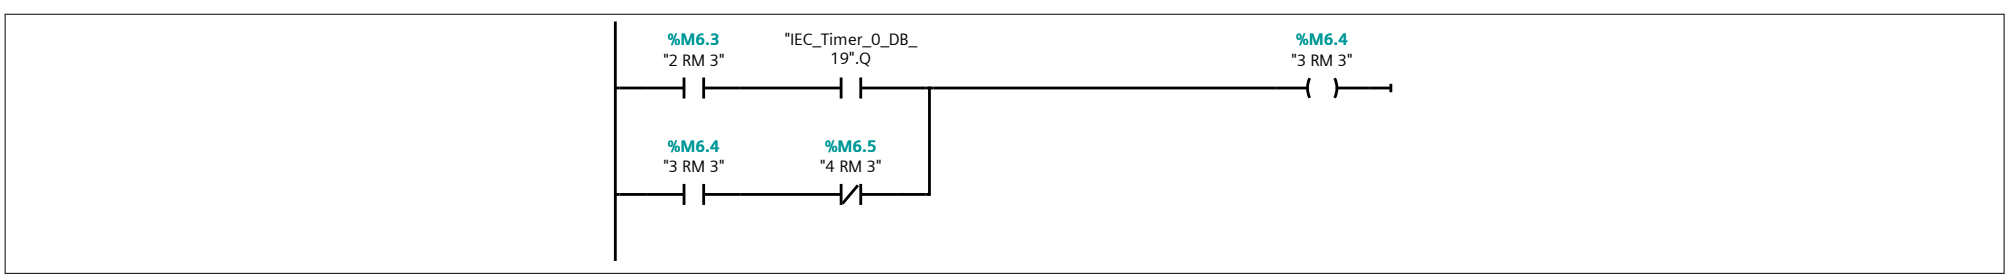


Network 20:

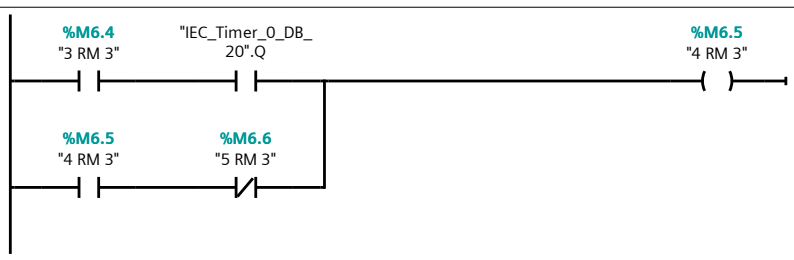


Network 21:

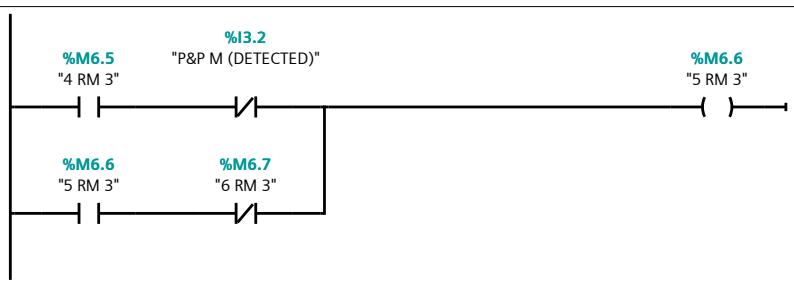


Network 22:

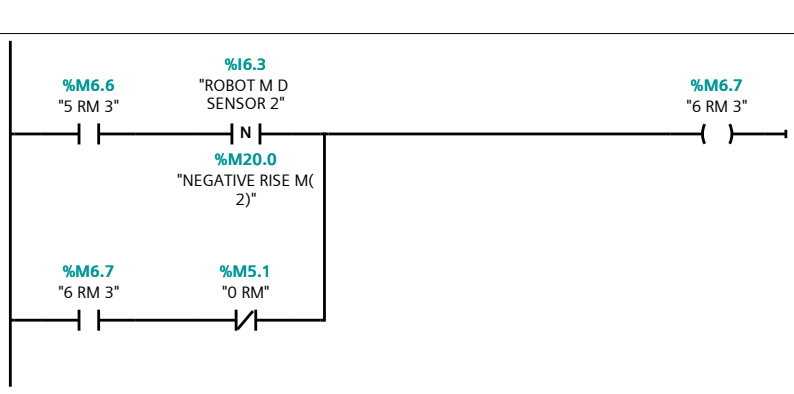


Network 23:

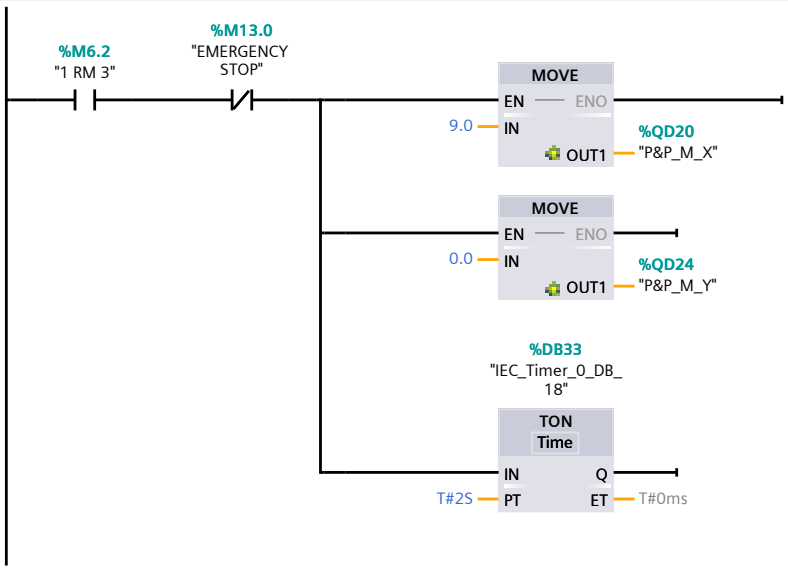


Network 24:

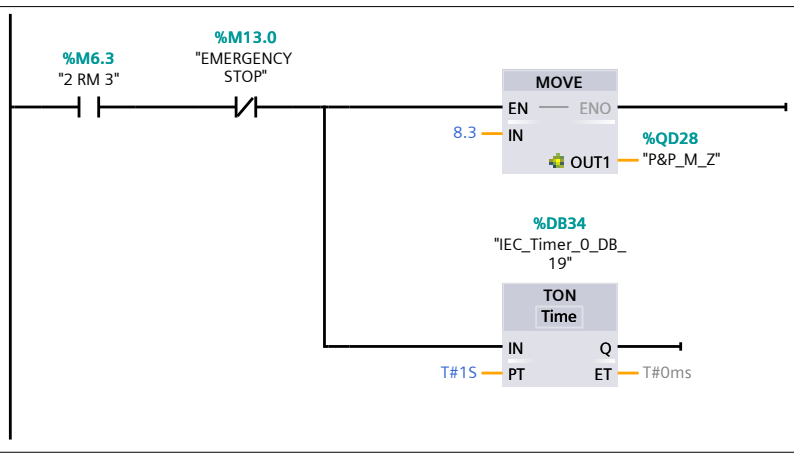


Network 25:

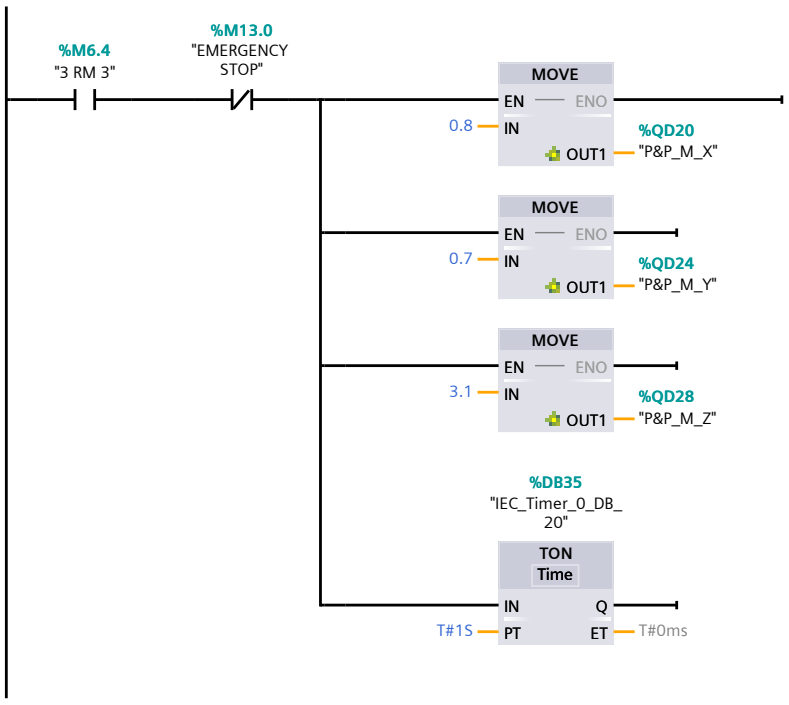


Network 26:

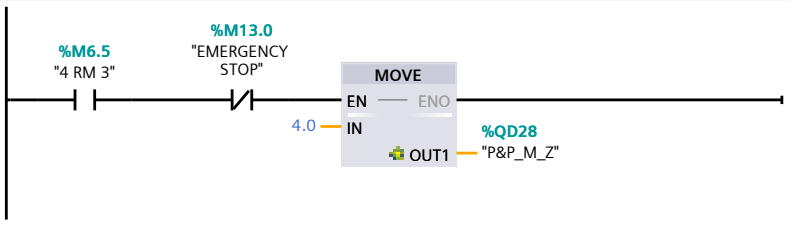


Network 27:

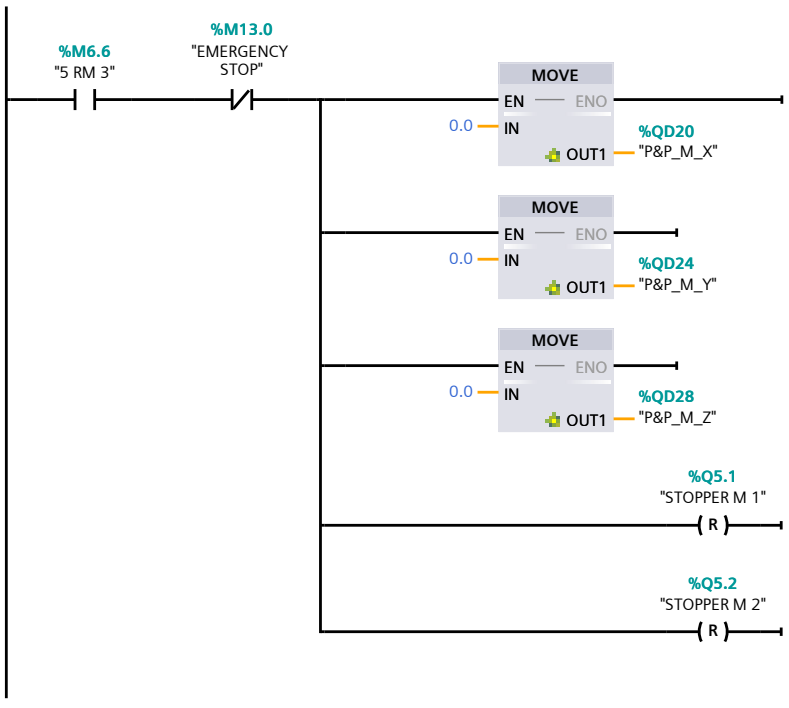


Network 28:

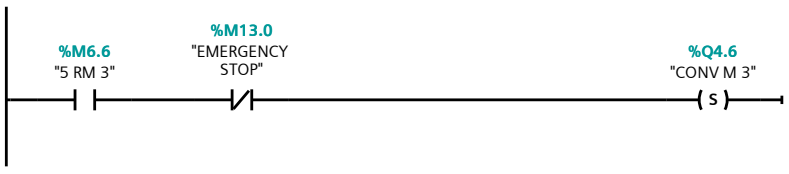

Network 29:

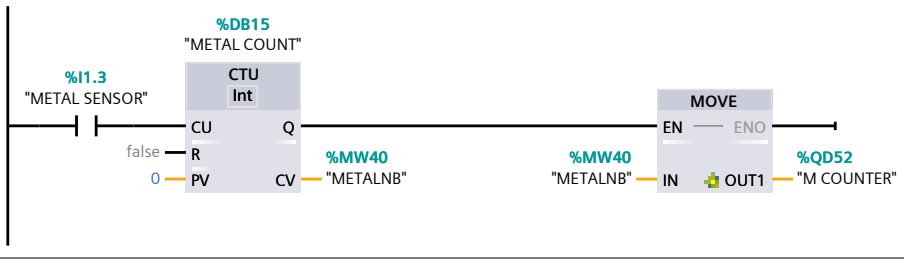

Network 30:

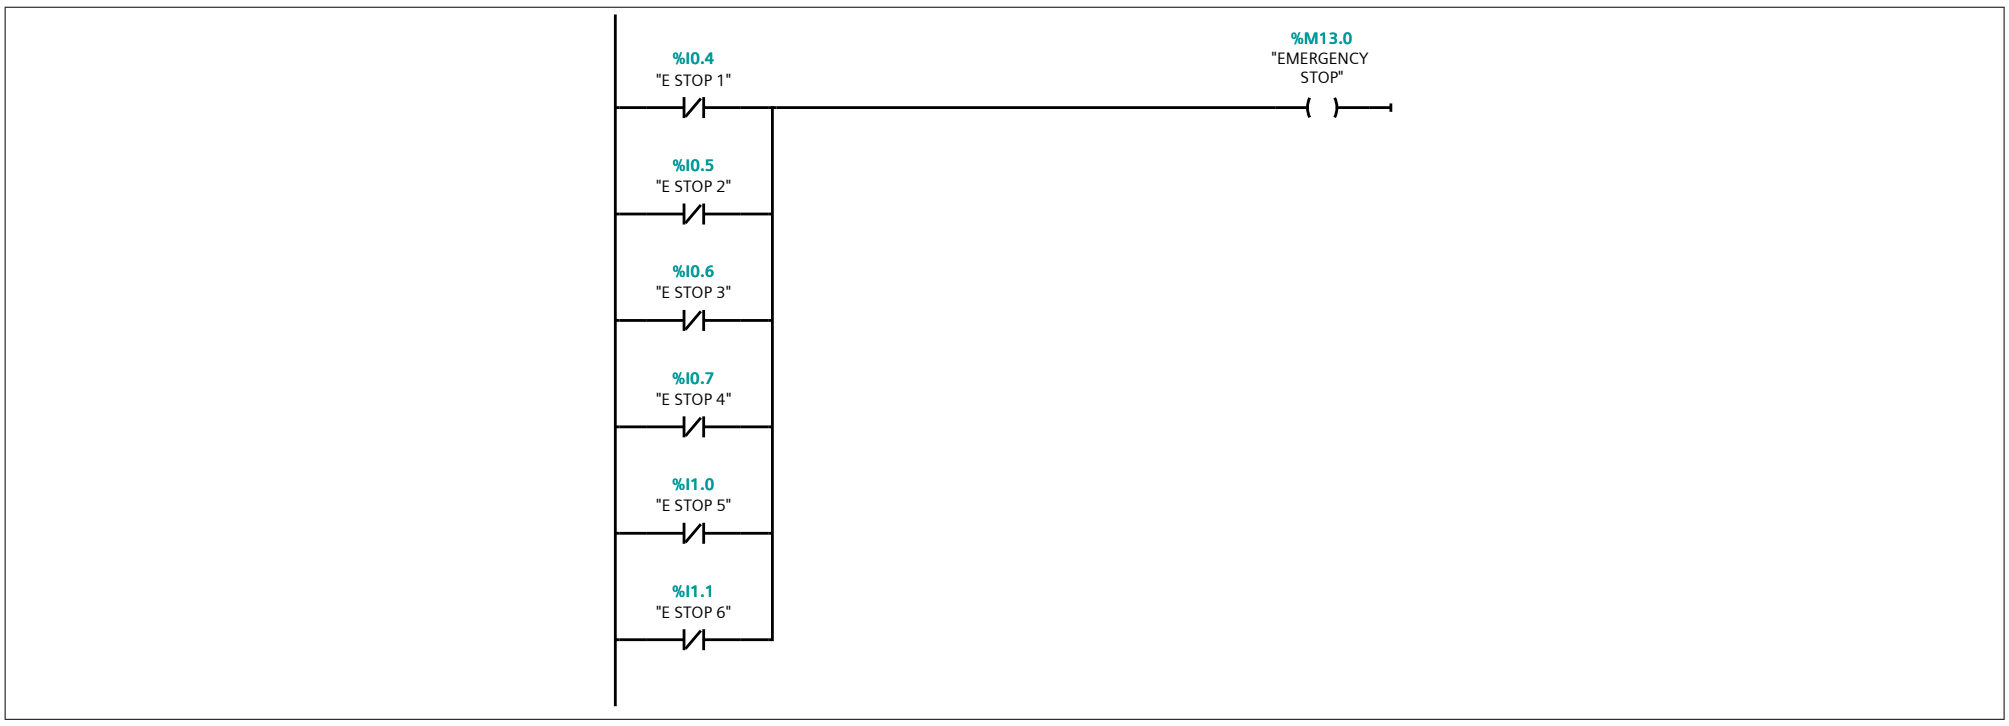
%I0.4
"E STOP 1"
%M13.0
"EMERGENCY
STOP"
%I0.5
"E STOP 2"
%I0.6
"E STOP 3"
%I0.7
"E STOP 4"
%I1.0
"E STOP 5"
%I1.1
"E STOP 6"

LIA_DISCRETE_DONE / PLC_1 [CPU 1211C DC/DC/DC] / Program blocks


ROBOT ARM GREEN [OB125]

ROBOT ARM GREEN Properties							
General							
Name	ROBOT ARM GREEN	**Number**	125	**Type**	OB	**Language**	LAD
Numbering	Automatic						
Information							
Title	"Main Program Sweep (Cycle)"	**Author**		**Comment**		**Family**	
Version	0.1	**User-defined ID**					


Name	Data type	Default value	Comment
▼ Input			
Initial_Call	Bool		Initial call of this OB
Remanence	Bool		=True, if remanent data are available
Temp			
Constant			

Network 1:


If a base is detected

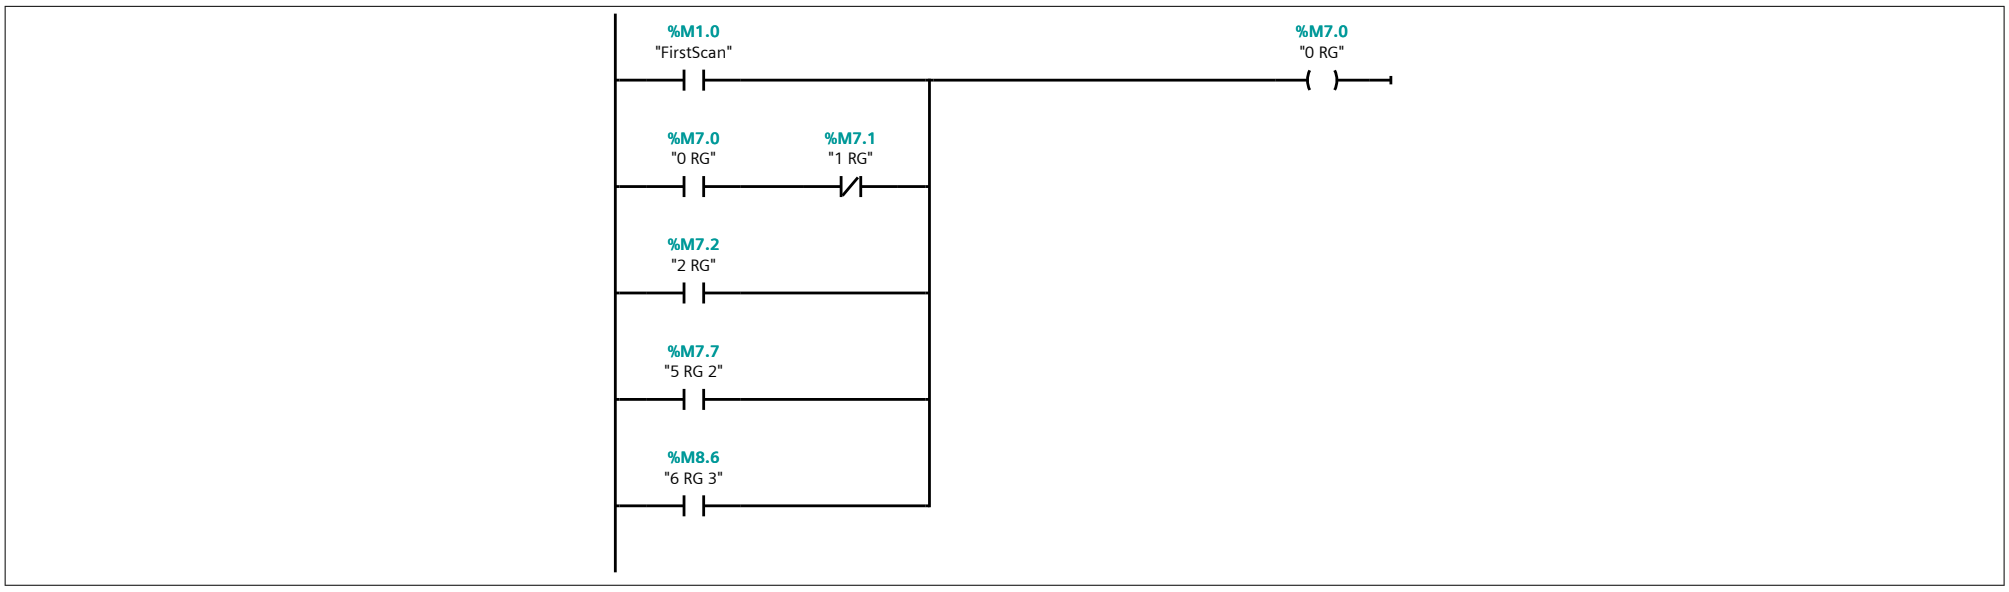


Network 2:

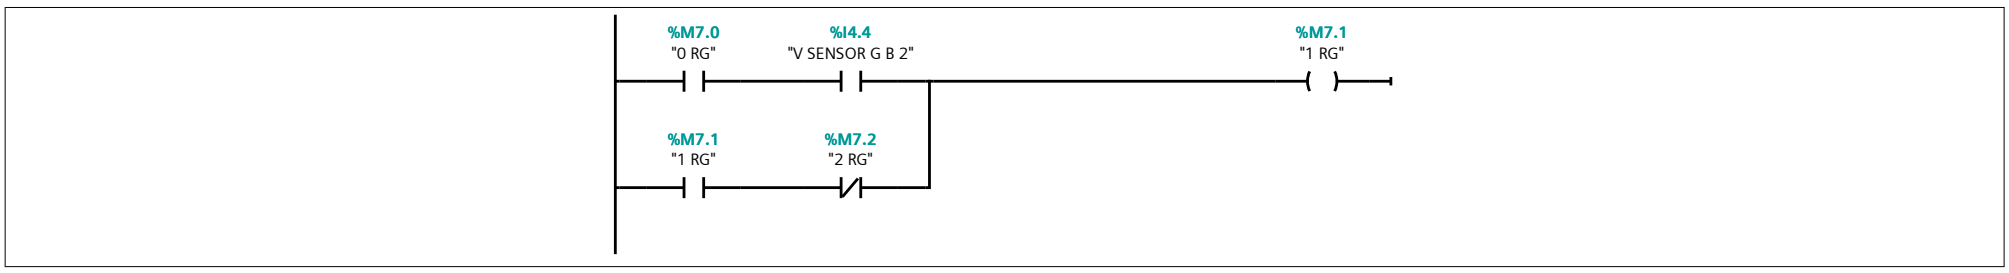


Network 3:

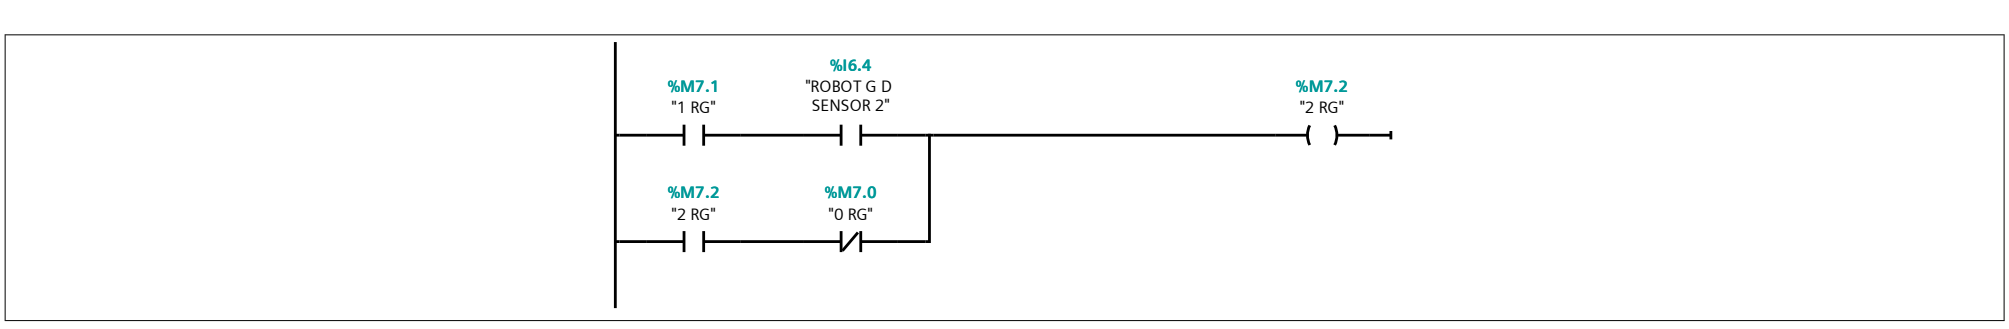


Network 4:

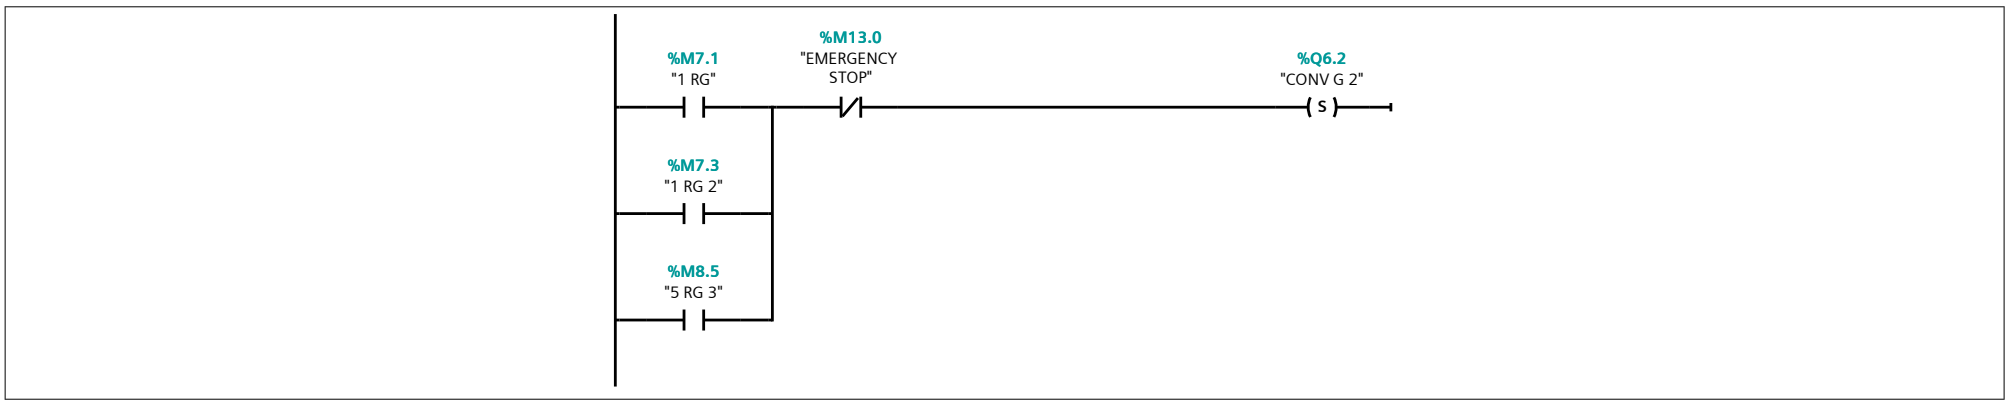

Network 5:

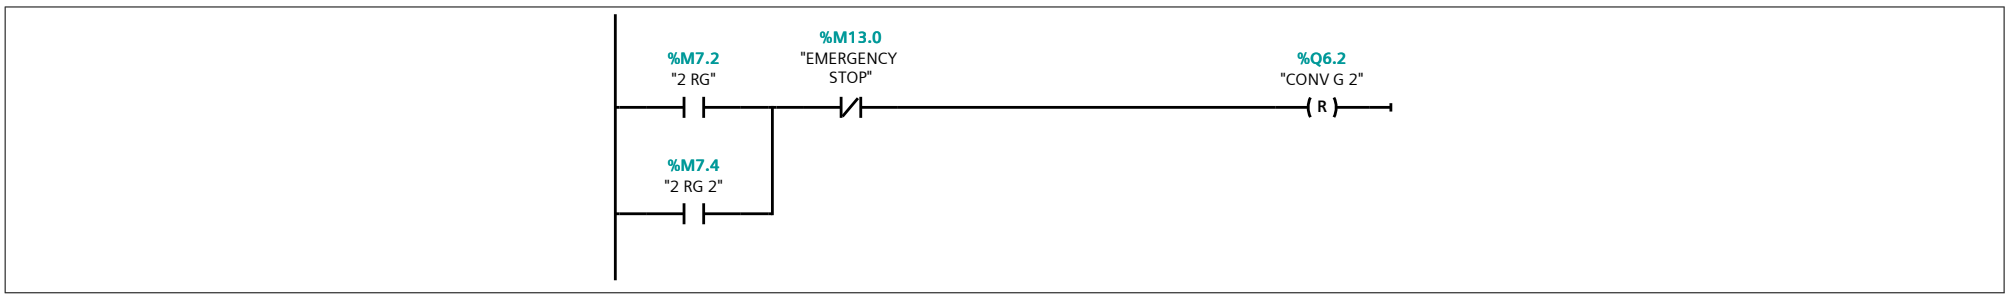


Network 6:

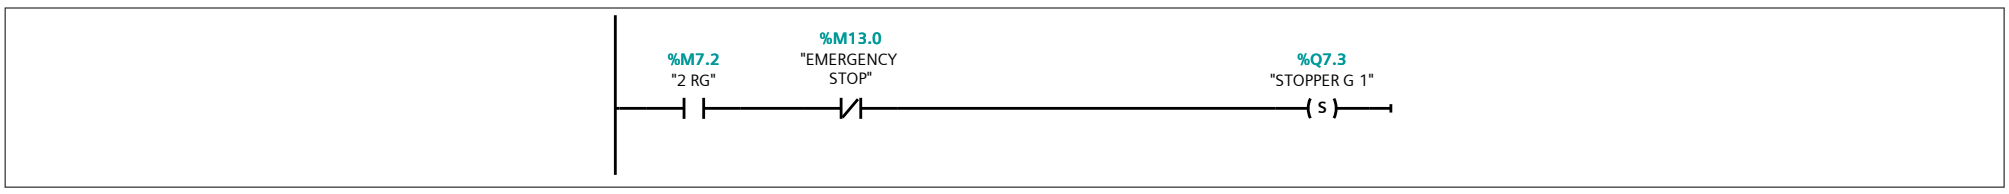


Network 7:




Network 8:

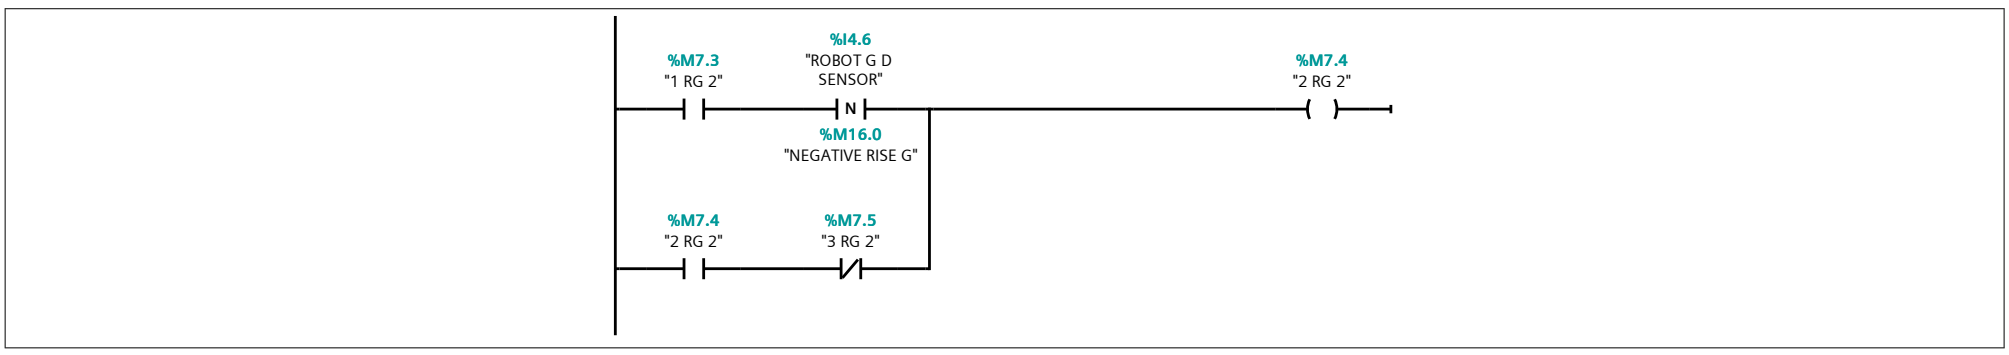

Network 9:

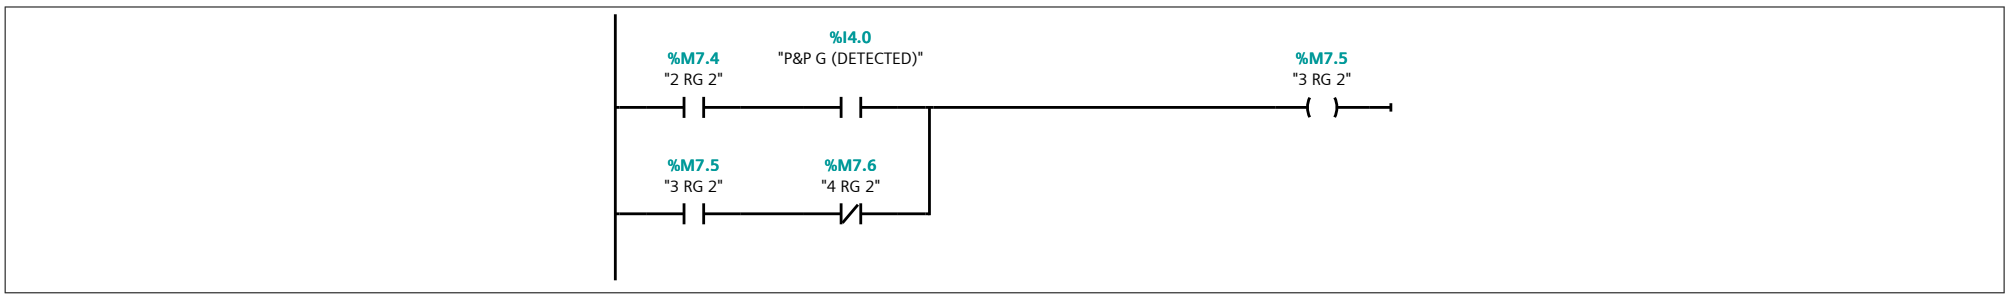


Network 10:

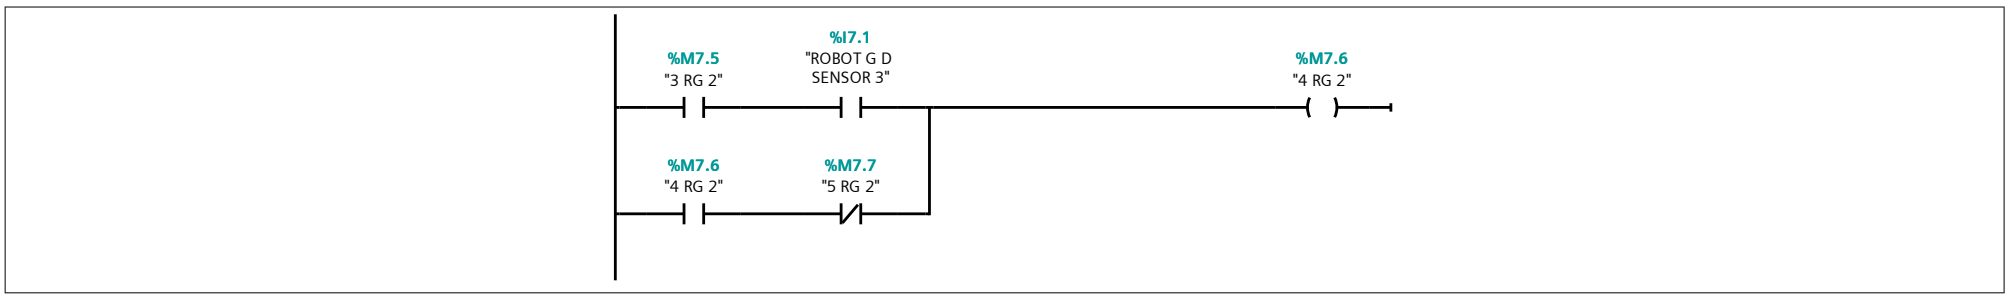


Network 11:




Network 12:

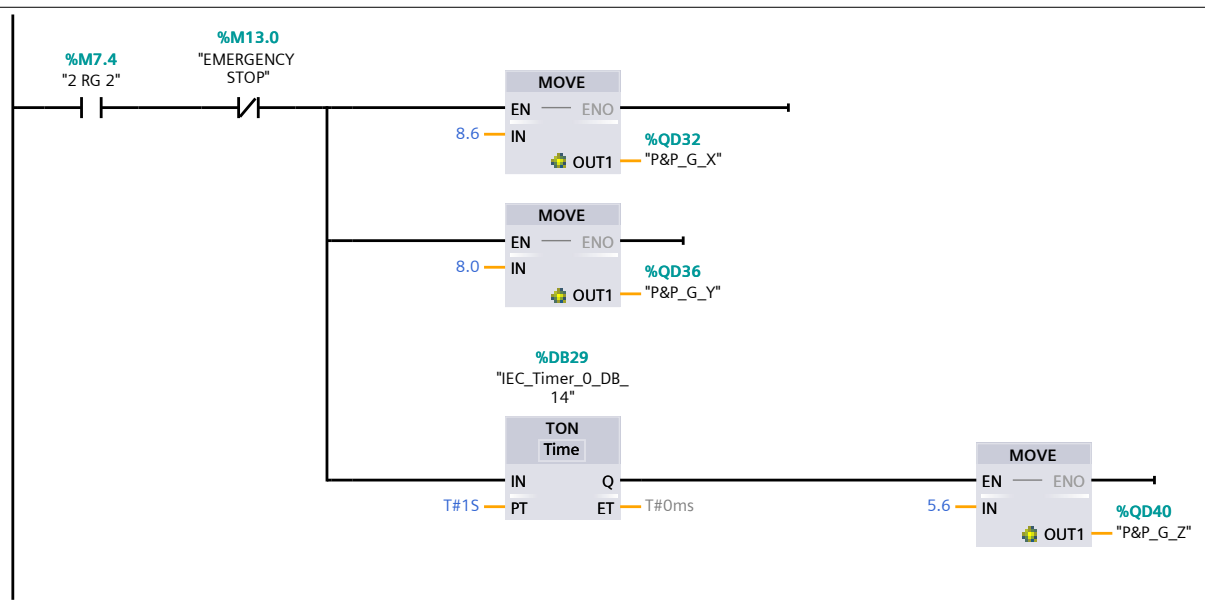


Network 13:

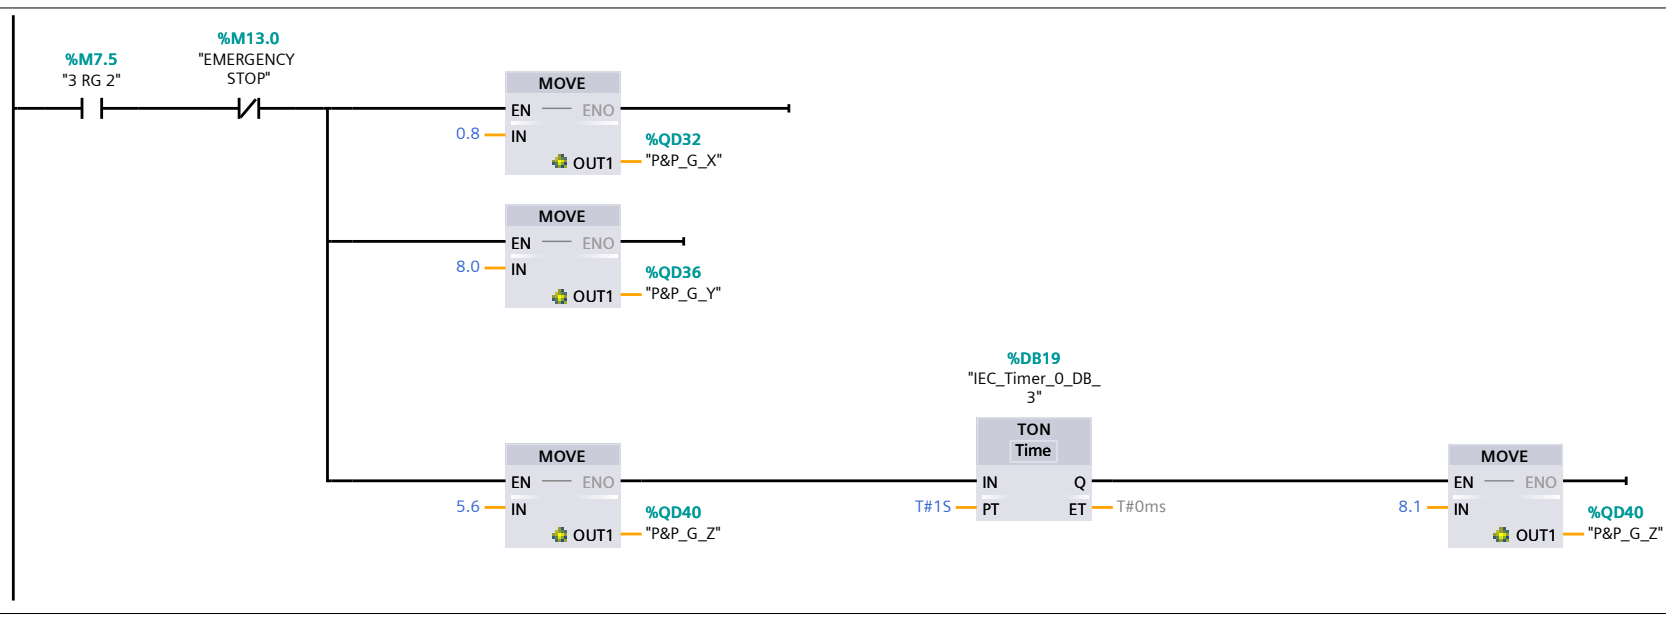


Network 14:

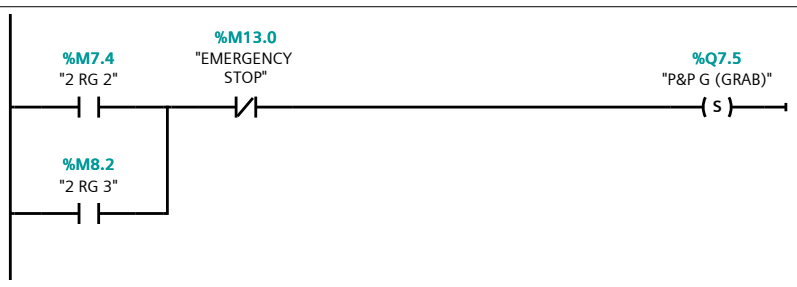


Network 15:

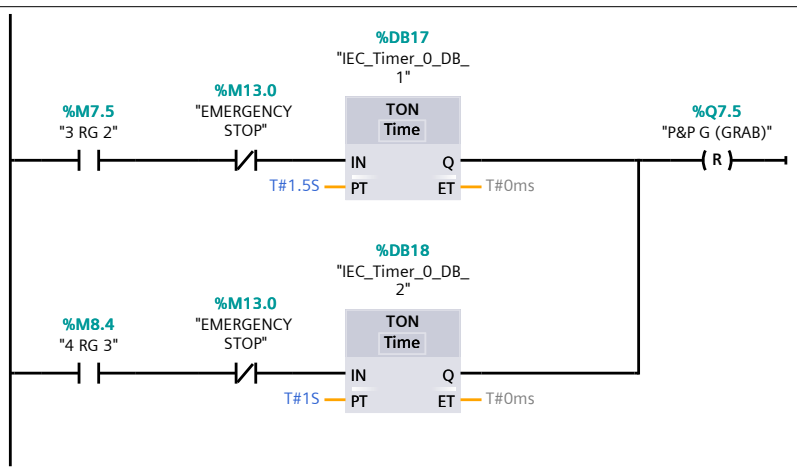

Network 16:

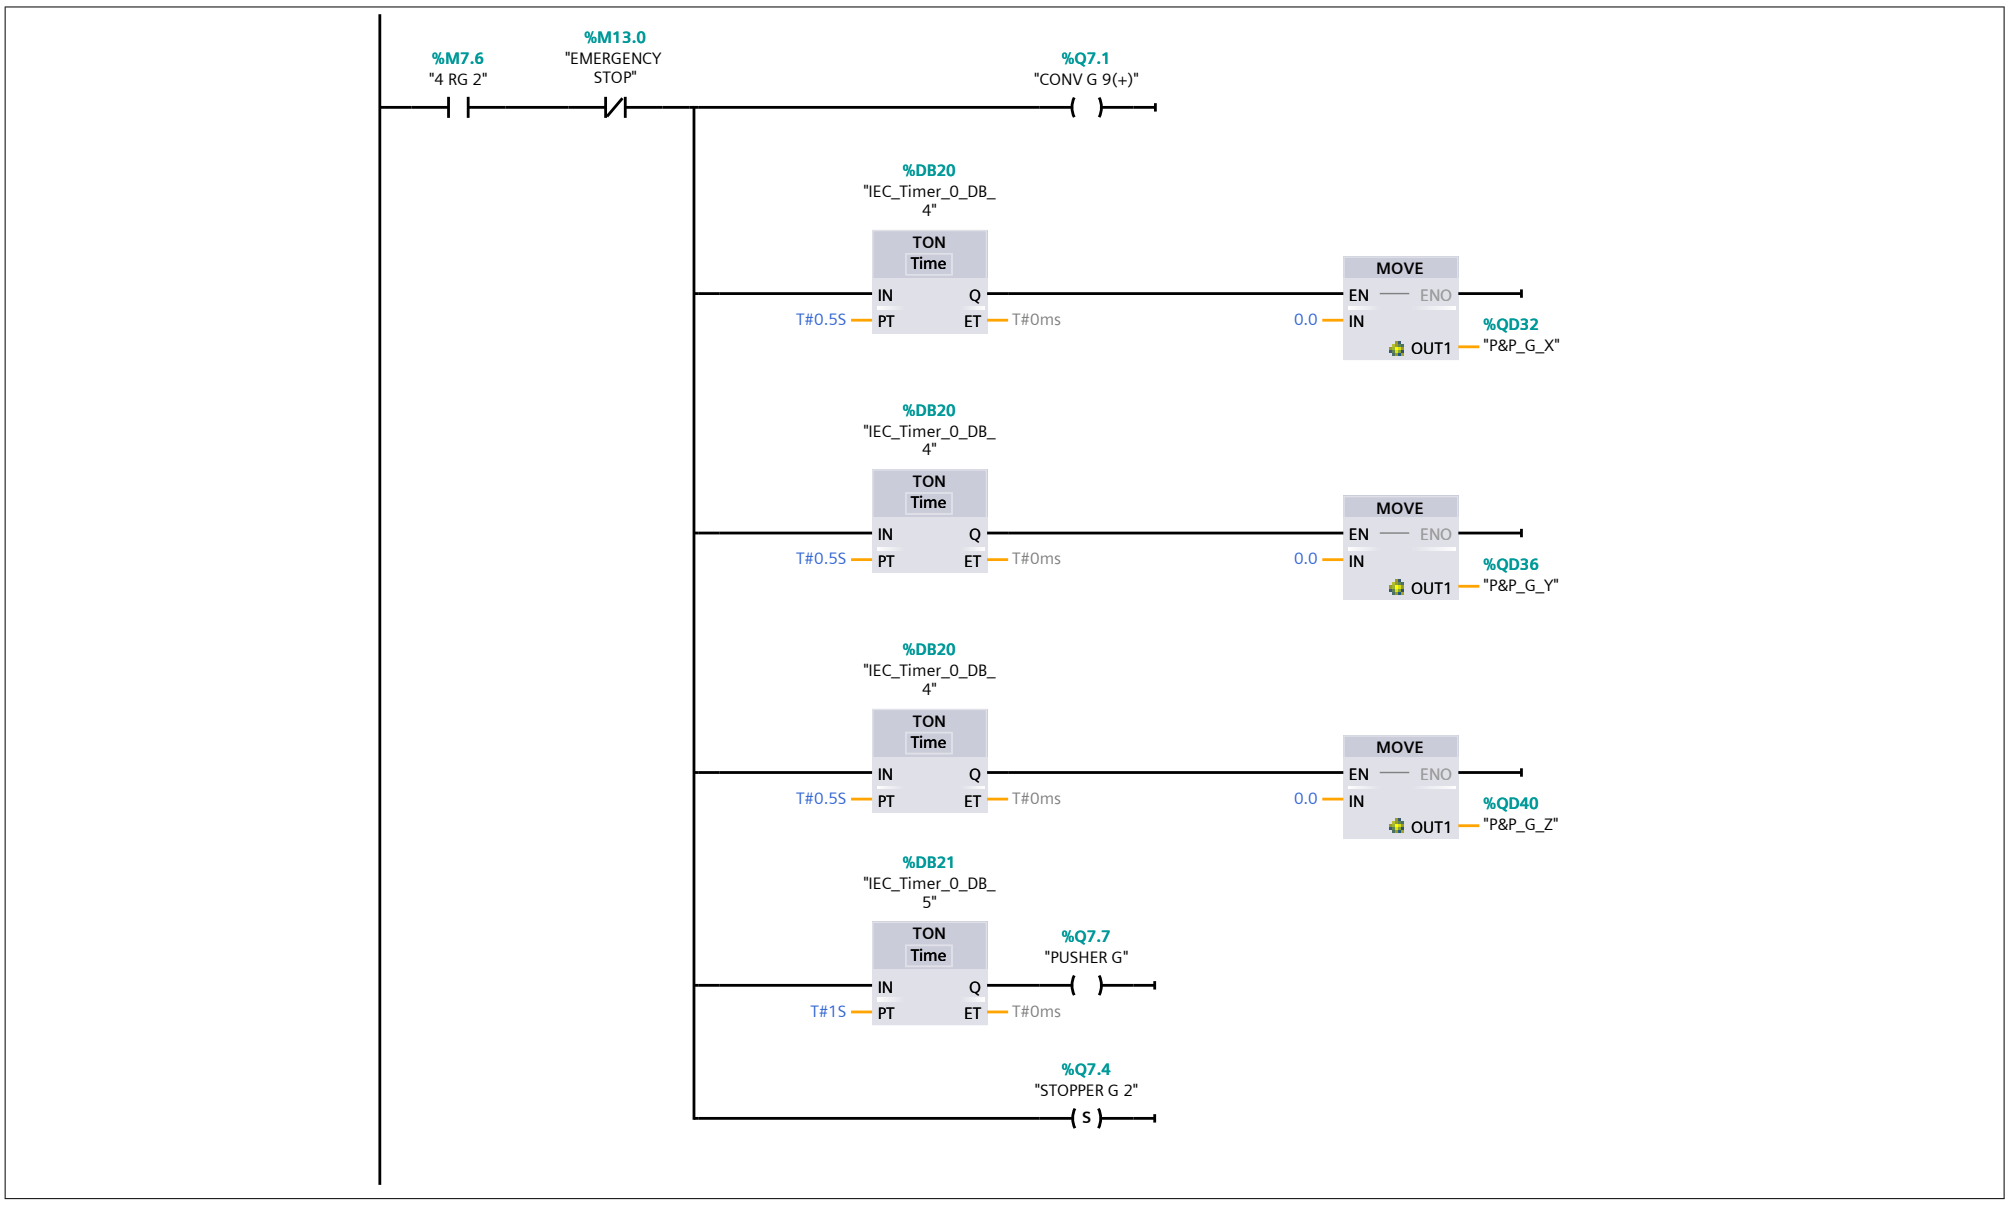


Network 17:

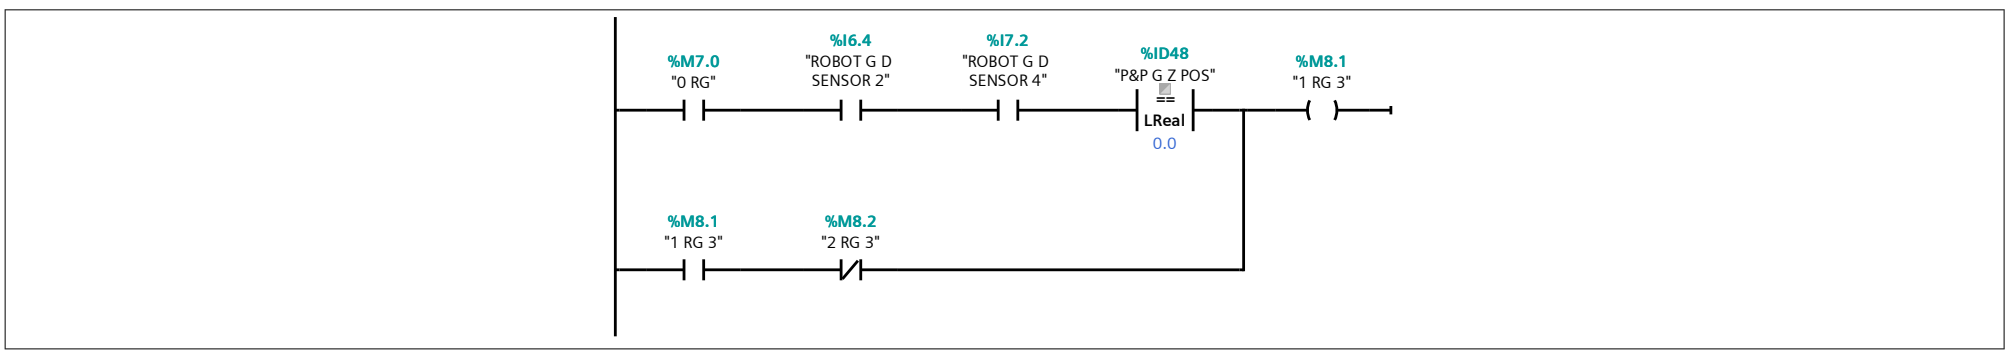


Network 18:


Network 19:

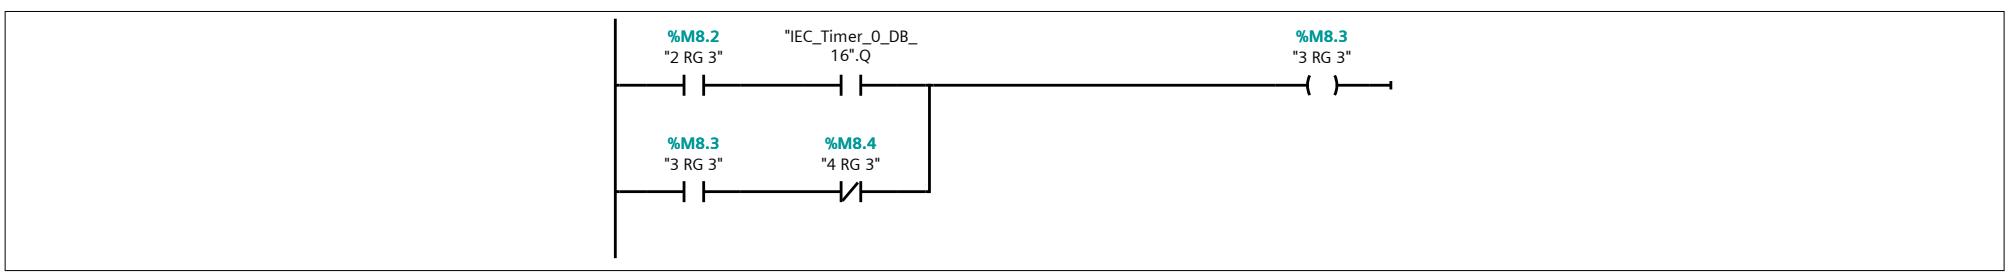


Network 20:

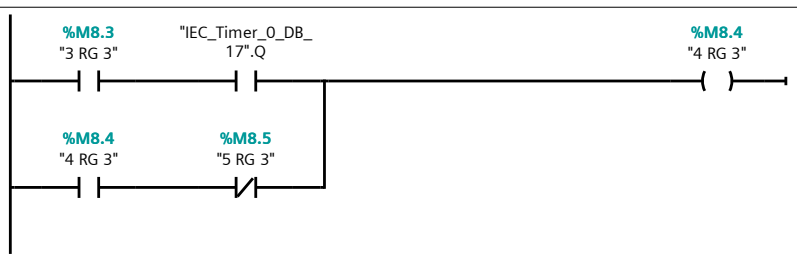


Network 21:

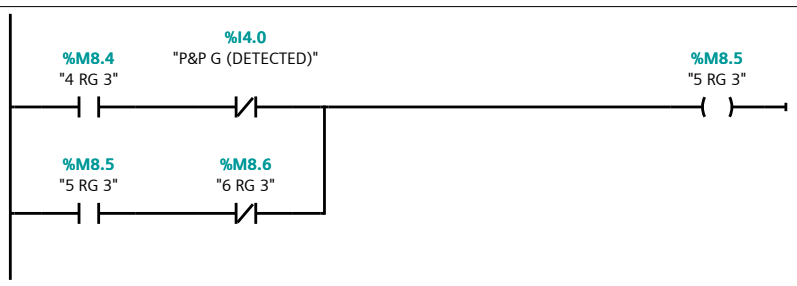


Network 22:

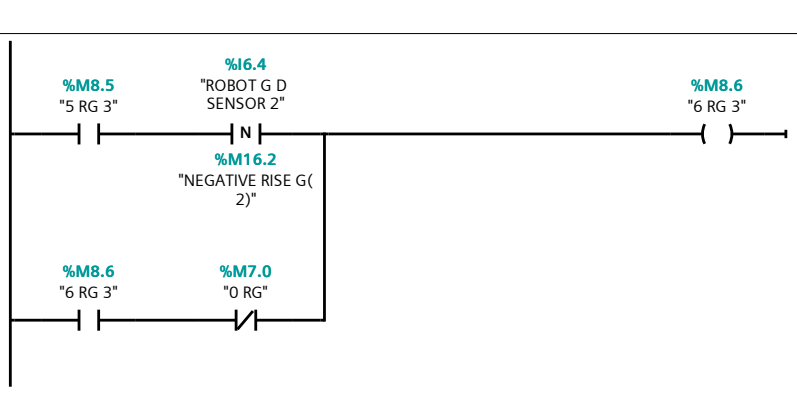


Network 23:

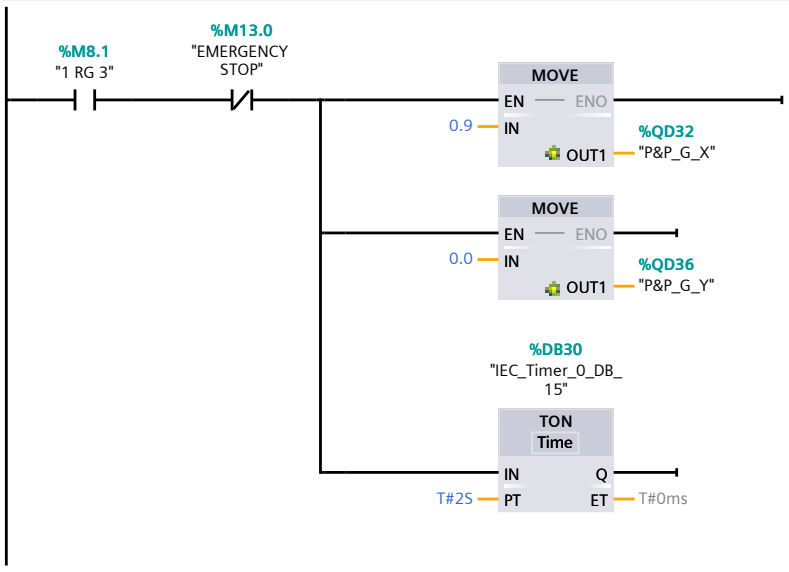


Network 24:

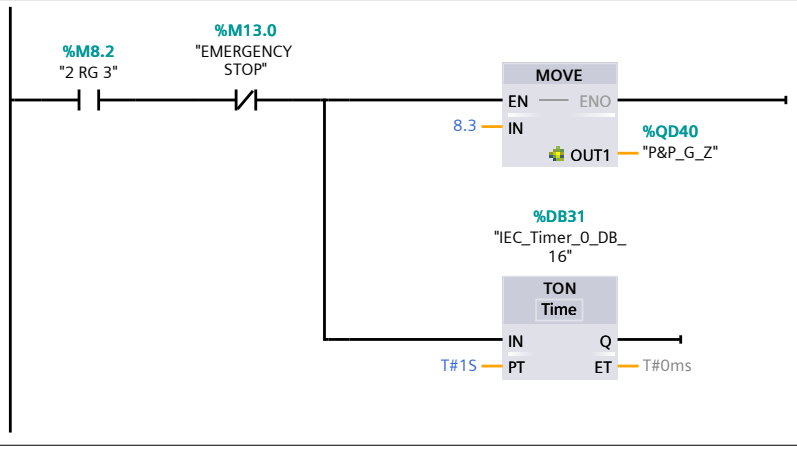


Network 25:

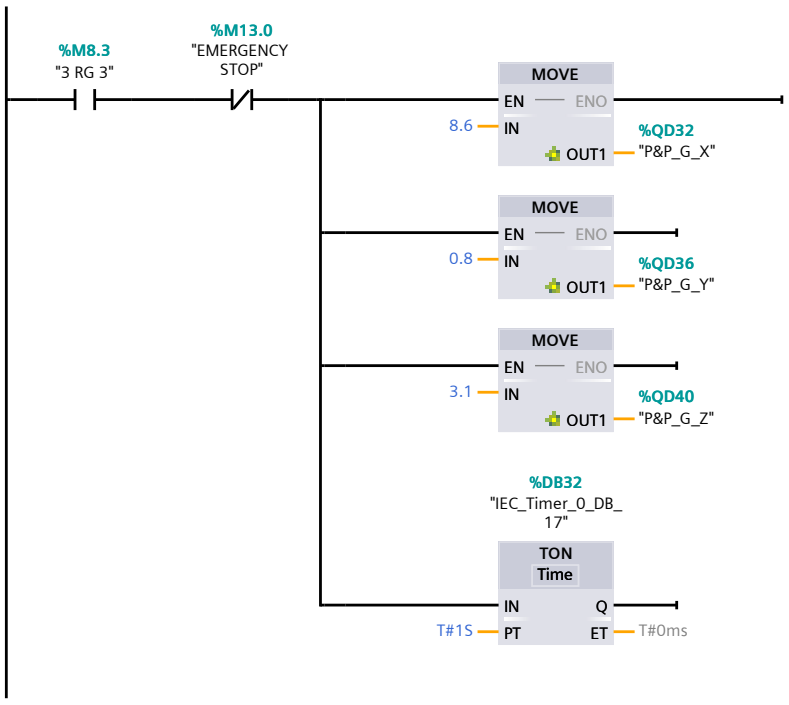


Network 26:

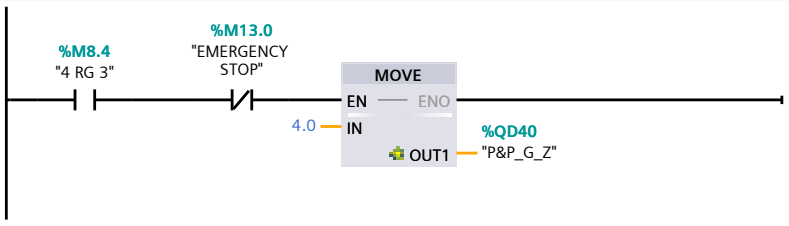


Network 27:

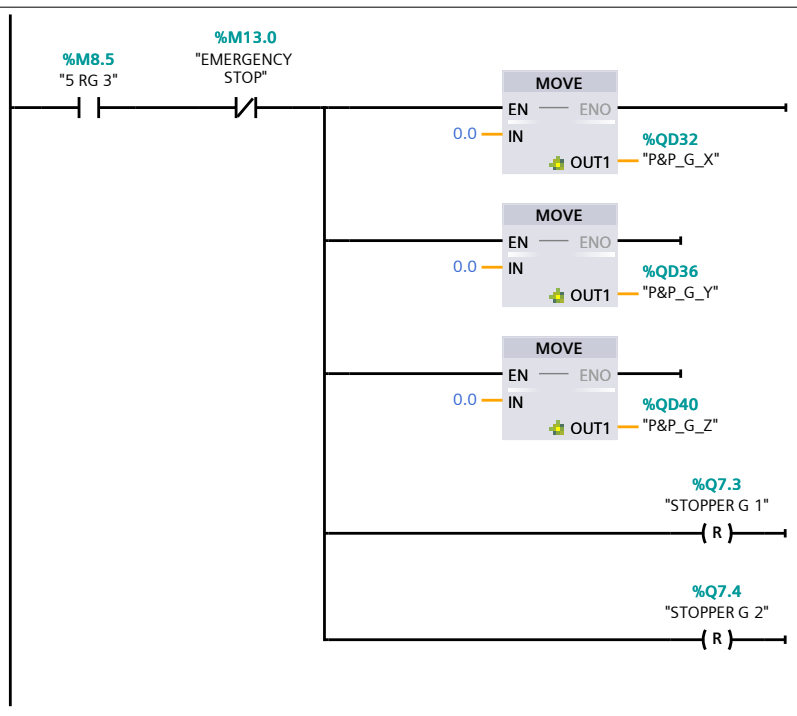

Network 28:

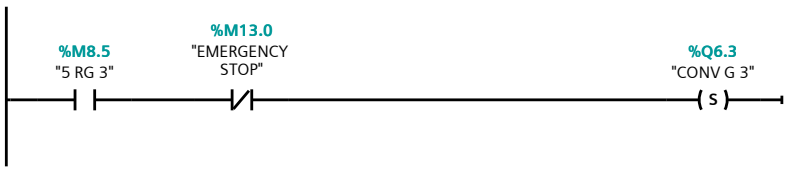


Network 29:

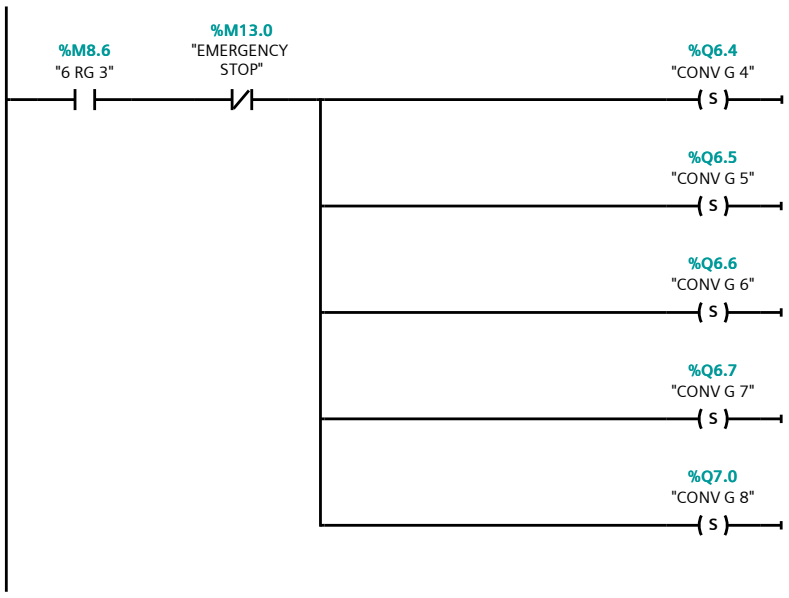

Network 30:



Network 31:

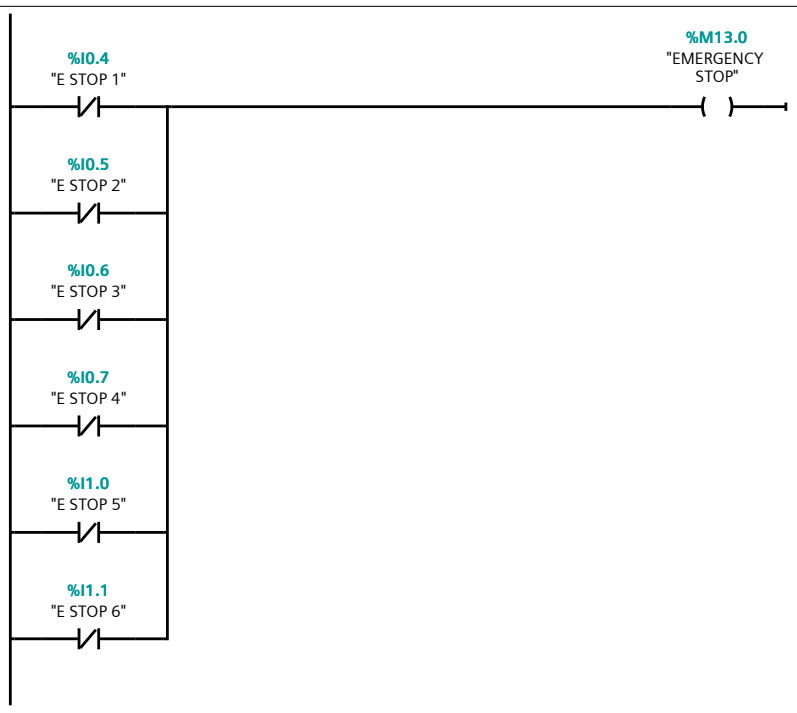

LIA_DISCRETE_DONE / PLC_1 [CPU 1211C DC/DC/DC] / Program blocks / System blocks / Program resources

TIMER3 [DB2]

TIMER3 Properties							
General							
Name	TIMER3	**Number**	2	**Type**	DB	**Language**	DB
Numbering	Automatic						
Information							
Title		**Author**	Simatic	**Comment**		**Family**	IEC
Version	1.0	**User-defined ID**	IEC_TMR				

Name	Data type	Start value	Retain	Accessible from HMI/OPC UA/Web API	Writ-able from HMI/ OPC UA/ Web API	Visible in HMI engi-neering	Setpoint	Supervi-sion	Comment
▼ Static									
PT	Time	T#0ms	False	True	True	True	False		
ET	Time	T#0ms	False	True	False	True	False		
IN	Bool	false	False	True	True	True	False		
Q	Bool	false	False	True	False	True	False		

LIA_DISCRETE_DONE / PLC_1 [CPU 1211C DC/DC/DC] / Program blocks / System blocks / Program resources

TIMER3_1 [DB1]

TIMER3_1 Properties							
General							
Name	TIMER3_1	**Number**	1	**Type**	DB	**Language**	DB
Numbering	Automatic						
Information							
Title		**Author**	Simatic	**Comment**		**Family**	IEC
Version	1.0	**User-defined ID**	IEC_TMR				

Name	Data type	Start value	Retain	Accessible from HMI/OPC UA/Web API	Writ-able from HMI/ OPC UA/ Web API	Visible in HMI engi-neering	Setpoint	Supervi-sion	Comment
▼ Static									
PT	Time	T#0ms	False	True	True	True	False		
ET	Time	T#0ms	False	True	False	True	False		
IN	Bool	false	False	True	True	True	False		
Q	Bool	false	False	True	False	True	False		

LIA_DISCRETE_DONE / PLC_1 [CPU 1211C DC/DC/DC] / Program blocks / System blocks / Program resources

TIMER2.1 [DB3]

TIMER2.1 Properties							
General							
Name	TIMER2.1	**Number**	3	**Type**	DB	**Language**	DB
Numbering	Automatic						
Information							
Title		**Author**	Simatic	**Comment**		**Family**	IEC
Version	1.0	**User-defined ID**	IEC_TMR				

Name	Data type	Start value	Retain	Accessible from HMI/OPC UA/Web API	Writ-able from HMI/ OPC UA/ Web API	Visible in HMI engi-neering	Setpoint	Supervi-sion	Comment
▼ Static									
PT	Time	T#0ms	False	True	True	True	False		
ET	Time	T#0ms	False	True	False	True	False		
IN	Bool	false	False	True	True	True	False		
Q	Bool	false	False	True	False	True	False		

LIA_DISCRETE_DONE / PLC_1 [CPU 1211C DC/DC/DC] / Program blocks / System blocks / Program resources

Timer5 [DB5]

Timer5 Properties							
General							
Name	Timer5	**Number**	5	**Type**	DB	**Language**	DB
Numbering	Automatic						
Information							
Title		**Author**	Simatic	**Comment**		**Family**	IEC
Version	1.0	**User-defined ID**	IEC_TMR				

Name	Data type	Start value	Retain	Accessible from HMI/OPC UA/Web API	Writ-able from HMI/ OPC UA/ Web API	Visible in HMI engi-neering	Setpoint	Supervi-sion	Comment
▼ Static									
PT	Time	T#0ms	False	True	True	True	False		
ET	Time	T#0ms	False	True	False	True	False		
IN	Bool	false	False	True	True	True	False		
Q	Bool	false	False	True	False	True	False		

LIA_DISCRETE_DONE / PLC_1 [CPU 1211C DC/DC/DC] / Program blocks / System blocks / Program resources

Timer6 [DB4]

Timer6 Properties							
General							
Name	Timer6	**Number**	4	**Type**	DB	**Language**	DB
Numbering	Automatic						
Information							
Title		**Author**	Simatic	**Comment**		**Family**	IEC
Version	1.0	**User-defined ID**	IEC_TMR				

Name	Data type	Start value	Retain	Accessible from HMI/OPC UA/Web API	Writ-able from HMI/ OPC UA/ Web API	Visible in HMI engi-neering	Setpoint	Supervi-sion	Comment
▼ Static									
PT	Time	T#0ms	False	True	True	True	False		
ET	Time	T#0ms	False	True	False	True	False		
IN	Bool	false	False	True	True	True	False		
Q	Bool	false	False	True	False	True	False		

LIA_DISCRETE_DONE / PLC_1 [CPU 1211C DC/DC/DC] / Program blocks / System blocks / Program resources

0TIMERARM [DB6]

0TIMERARM Properties							
General							
Name	0TIMERARM	**Number**	6	**Type**	DB	**Language**	DB
Numbering	Automatic						
Information							
Title		**Author**	Simatic	**Comment**		**Family**	IEC
Version	1.0	**User-defined ID**	IEC_TMR				

Name	Data type	Start value	Retain	Accessible from HMI/OPC UA/Web API	Writ-able from HMI/ OPC UA/ Web API	Visible in HMI engi-neering	Setpoint	Supervi-sion	Comment
▼ Static									
PT	Time	T#0ms	False	True	True	True	False		
ET	Time	T#0ms	False	True	False	True	False		
IN	Bool	false	False	True	True	True	False		
Q	Bool	false	False	True	False	True	False		

LIA_DISCRETE_DONE / PLC_1 [CPU 1211C DC/DC/DC] / Program blocks / System blocks / Program resources

PUSHERDELAY [DB7]

PUSHERDELAY Properties							
General							
Name	PUSHERDELAY	**Number**	7	**Type**	DB	**Language**	DB
Numbering	Automatic						
Information							
Title		**Author**	Simatic	**Comment**		**Family**	IEC
Version	1.0	**User-defined ID**	IEC_TMR				

Name	Data type	Start value	Retain	Accessible from HMI/OPC UA/Web API	Writ-able from HMI/ OPC UA/ Web API	Visible in HMI engi-neering	Setpoint	Supervi-sion	Comment
▼ Static									
PT	Time	T#0ms	False	True	True	True	False		
ET	Time	T#0ms	False	True	False	True	False		
IN	Bool	false	False	True	True	True	False		
Q	Bool	false	False	True	False	True	False		

LIA_DISCRETE_DONE / PLC_1 [CPU 1211C DC/DC/DC] / Program blocks / System blocks / Program resources

TIMER1RB3 [DB9]

TIMER1RB3 Properties							
General							
Name	TIMER1RB3	**Number**	9	**Type**	DB	**Language**	DB
Numbering	Automatic						
Information							
Title		**Author**	Simatic	**Comment**		**Family**	IEC
Version	1.0	**User-defined ID**	IEC_TMR				

Name	Data type	Start value	Retain	Accessible from HMI/OPC UA/Web API	Writ-able from HMI/ OPC UA/ Web API	Visible in HMI engi-neering	Setpoint	Supervi-sion	Comment
▼ Static									
PT	Time	T#0ms	False	True	True	True	False		
ET	Time	T#0ms	False	True	False	True	False		
IN	Bool	false	False	True	True	True	False		
Q	Bool	false	False	True	False	True	False		

LIA_DISCRETE_DONE / PLC_1 [CPU 1211C DC/DC/DC] / Program blocks / System blocks / Program resources

TIMER2RB3 [DB8]

TIMER2RB3 Properties							
General							
Name	TIMER2RB3	**Number**	8	**Type**	DB	**Language**	DB
Numbering	Automatic						
Information							
Title		**Author**	Simatic	**Comment**		**Family**	IEC
Version	1.0	**User-defined ID**	IEC_TMR				

Name	Data type	Start value	Retain	Accessible from HMI/OPC UA/Web API	Writ-able from HMI/ OPC UA/ Web API	Visible in HMI engi-neering	Setpoint	Supervi-sion	Comment
▼ Static									
PT	Time	T#0ms	False	True	True	True	False		
ET	Time	T#0ms	False	True	False	True	False		
IN	Bool	false	False	True	True	True	False		
Q	Bool	false	False	True	False	True	False		

LIA_DISCRETE_DONE / PLC_1 [CPU 1211C DC/DC/DC] / Program blocks / System blocks / Program resources

TIMER3RB3 [DB10]

TIMER3RB3 Properties							
General							
Name	TIMER3RB3	**Number**	10	**Type**	DB	**Language**	DB
Numbering	Automatic						
Information							
Title		**Author**	Simatic	**Comment**		**Family**	IEC
Version	1.0	**User-defined ID**	IEC_TMR				

Name	Data type	Start value	Retain	Accessible from HMI/OPC UA/Web API	Writ-able from HMI/ OPC UA/ Web API	Visible in HMI engi-neering	Setpoint	Supervi-sion	Comment
▼ Static									
PT	Time	T#0ms	False	True	True	True	False		
ET	Time	T#0ms	False	True	False	True	False		
IN	Bool	false	False	True	True	True	False		
Q	Bool	false	False	True	False	True	False		

LIA_DISCRETE_DONE / PLC_1 [CPU 1211C DC/DC/DC] / Program blocks / System blocks / Program resources

IEC_Timer_0_DB [DB11]

IEC_Timer_0_DB Properties							
General							
Name	IEC_Timer_0_DB	**Number**	11	**Type**	DB	**Language**	DB
Numbering	Automatic						
Information							
Title		**Author**	Simatic	**Comment**		**Family**	IEC
Version	1.0	**User-defined ID**	IEC_TMR				

Name	Data type	Start value	Retain	Accessible from HMI/OPC UA/Web API	Writ-able from HMI/ OPC UA/ Web API	Visible in HMI engi-neering	Setpoint	Supervi-sion	Comment
▼ Static									
PT	Time	T#0ms	False	True	True	True	False		
ET	Time	T#0ms	False	True	False	True	False		
IN	Bool	false	False	True	True	True	False		
Q	Bool	false	False	True	False	True	False		

LIA_DISCRETE_DONE / PLC_1 [CPU 1211C DC/DC/DC] / Program blocks / System blocks / Program resources

TIMER4RB3 [DB12]

TIMER4RB3 Properties							
General							
Name	TIMER4RB3	**Number**	12	**Type**	DB	**Language**	DB
Numbering	Automatic						
Information							
Title		**Author**	Simatic	**Comment**		**Family**	IEC
Version	1.0	**User-defined ID**	IEC_TMR				

Name	Data type	Start value	Retain	Accessible from HMI/OPC UA/Web API	Writ-able from HMI/ OPC UA/ Web API	Visible in HMI engi-neering	Setpoint	Supervi-sion	Comment
▼ Static									
PT	Time	T#0ms	False	True	True	True	False		
ET	Time	T#0ms	False	True	False	True	False		
IN	Bool	false	False	True	True	True	False		
Q	Bool	false	False	True	False	True	False		

LIA_DISCRETE_DONE / PLC_1 [CPU 1211C DC/DC/DC] / Program blocks / System blocks / Program resources

BLUE COUNT [DB13]

BLUE COUNT Properties							
General							
Name	BLUE COUNT	**Number**	13	**Type**	DB	**Language**	DB
Numbering	Automatic						
Information							
Title		**Author**	Simatic	**Comment**		**Family**	IEC
Version	1.0	**User-defined ID**	CNTR				

Name	Data type	Start value	Retain	Accessible from HMI/OPC UA/Web API	Writable from HMI/OPC UA/Web API	Visible in HMI engineering	Setpoint	Supervision	Comment
▼ Static									
CU	Bool	false	True	True	True	True	False		
CD	Bool	false	True	True	True	True	False		
R	Bool	false	True	True	True	True	False		
LD	Bool	false	True	True	True	True	False		
QU	Bool	false	True	True	True	True	False		
QD	Bool	false	True	True	True	True	False		
PV	Int	0	True	True	True	True	False		
CV	Int	0	True	True	True	True	False		

LIA_DISCRETE_DONE / PLC_1 [CPU 1211C DC/DC/DC] / Program blocks / System blocks / Program resources

METAL COUNT [DB15]

METAL COUNT Properties							
General							
Name	METAL COUNT	**Number**	15	**Type**	DB	**Language**	DB
Numbering	Automatic						
Information							
Title		**Author**	Simatic	**Comment**		**Family**	IEC
Version	1.0	**User-defined ID**	CNTR				

Name	Data type	Start value	Retain	Accessible from HMI/OPC UA/Web API	Writ-able from HMI/ OPC UA/ Web API	Visible in HMI engi-neering	Setpoint	Supervi-sion	Comment
▼ Static									
CU	Bool	false	True	True	True	True	False		
CD	Bool	false	True	True	True	True	False		
R	Bool	false	True	True	True	True	False		
LD	Bool	false	True	True	True	True	False		
QU	Bool	false	True	True	True	True	False		
QD	Bool	false	True	True	True	True	False		
PV	Int	0	True	True	True	True	False		
CV	Int	0	True	True	True	True	False		

LIA_DISCRETE_DONE / PLC_1 [CPU 1211C DC/DC/DC] / Program blocks / System blocks / Program resources

GREEN COUNT [DB16]

GREEN COUNT Properties							
General							
Name	GREEN COUNT	**Number**	16	**Type**	DB	**Language**	DB
Numbering	Automatic						
Information							
Title		**Author**	Simatic	**Comment**		**Family**	IEC
Version	1.0	**User-defined ID**	CNTR				

Name	Data type	Start value	Retain	Accessible from HMI/OPC UA/Web API	Writable from HMI/OPC UA/Web API	Visible in HMI engineering	Setpoint	Supervision	Comment
▼ Static									
CU	Bool	false	True	True	True	True	False		
CD	Bool	false	True	True	True	True	False		
R	Bool	false	True	True	True	True	False		
LD	Bool	false	True	True	True	True	False		
QU	Bool	false	True	True	True	True	False		
QD	Bool	false	True	True	True	True	False		
PV	Int	0	True	True	True	True	False		
CV	Int	0	True	True	True	True	False		

LIA_DISCRETE_DONE / PLC_1 [CPU 1211C DC/DC/DC] / Program blocks / System blocks / Program resources

IEC_Timer_0_DB_1 [DB17]

IEC_Timer_0_DB_1 Properties							
General							
Name	IEC_Timer_0_DB_1	**Number**	17	**Type**	DB	**Language**	DB
Numbering	Automatic						
Information							
Title		**Author**	Simatic	**Comment**		**Family**	IEC
Version	1.0	**User-defined ID**	IEC_TMR				

Name	Data type	Start value	Retain	Accessible from HMI/OPC UA/Web API	Writ-able from HMI/ OPC UA/ Web API	Visible in HMI engi-neering	Setpoint	Supervi-sion	Comment
▼ Static									
PT	Time	T#0ms	False	True	True	True	False		
ET	Time	T#0ms	False	True	False	True	False		
IN	Bool	false	False	True	True	True	False		
Q	Bool	false	False	True	False	True	False		

LIA_DISCRETE_DONE / PLC_1 [CPU 1211C DC/DC/DC] / Program blocks / System blocks / Program resources

IEC_Timer_0_DB_2 [DB18]

IEC_Timer_0_DB_2 Properties							
General							
Name	IEC_Timer_0_DB_2	**Number**	18	**Type**	DB	**Language**	DB
Numbering	Automatic						
Information							
Title		**Author**	Simatic	**Comment**		**Family**	IEC
Version	1.0	**User-defined ID**	IEC_TMR				

Name	Data type	Start value	Retain	Accessible from HMI/OPC UA/Web API	Writ-able from HMI/ OPC UA/ Web API	Visible in HMI engi-neering	Setpoint	Supervi-sion	Comment
▼ Static									
PT	Time	T#0ms	False	True	True	True	False		
ET	Time	T#0ms	False	True	False	True	False		
IN	Bool	false	False	True	True	True	False		
Q	Bool	false	False	True	False	True	False		

LIA_DISCRETE_DONE / PLC_1 [CPU 1211C DC/DC/DC] / Program blocks / System blocks / Program resources

IEC_Timer_0_DB_3 [DB19]

IEC_Timer_0_DB_3 Properties							
General							
Name	IEC_Timer_0_DB_3	**Number**	19	**Type**	DB	**Language**	DB
Numbering	Automatic						
Information							
Title		**Author**	Simatic	**Comment**		**Family**	IEC
Version	1.0	**User-defined ID**	IEC_TMR				

Name	Data type	Start value	Retain	Accessible from HMI/OPC UA/Web API	Writ-able from HMI/ OPC UA/ Web API	Visible in HMI engi-neering	Setpoint	Supervi-sion	Comment
▼ Static									
PT	Time	T#0ms	False	True	True	True	False		
ET	Time	T#0ms	False	True	False	True	False		
IN	Bool	false	False	True	True	True	False		
Q	Bool	false	False	True	False	True	False		

LIA_DISCRETE_DONE / PLC_1 [CPU 1211C DC/DC/DC] / Program blocks / System blocks / Program resources

IEC_Timer_0_DB_4 [DB20]

IEC_Timer_0_DB_4 Properties							
General							
Name	IEC_Timer_0_DB_4	**Number**	20	**Type**	DB	**Language**	DB
Numbering	Automatic						
Information							
Title		**Author**	Simatic	**Comment**		**Family**	IEC
Version	1.0	**User-defined ID**	IEC_TMR				

Name	Data type	Start value	Retain	Accessible from HMI/OPC UA/Web API	Writ-able from HMI/ OPC UA/ Web API	Visible in HMI engi-neering	Setpoint	Supervi-sion	Comment
▼ Static									
PT	Time	T#0ms	False	True	True	True	False		
ET	Time	T#0ms	False	True	False	True	False		
IN	Bool	false	False	True	True	True	False		
Q	Bool	false	False	True	False	True	False		

LIA_DISCRETE_DONE / PLC_1 [CPU 1211C DC/DC/DC] / Program blocks / System blocks / Program resources

IEC_Timer_0_DB_5 [DB21]

IEC_Timer_0_DB_5 Properties							
General							
Name	IEC_Timer_0_DB_5	**Number**	21	**Type**	DB	**Language**	DB
Numbering	Automatic						
Information							
Title		**Author**	Simatic	**Comment**		**Family**	IEC
Version	1.0	**User-defined ID**	IEC_TMR				

Name	Data type	Start value	Retain	Accessible from HMI/OPC UA/Web API	Writ-able from HMI/ OPC UA/ Web API	Visible in HMI engi-neering	Setpoint	Supervi-sion	Comment
▼ Static									
PT	Time	T#0ms	False	True	True	True	False		
ET	Time	T#0ms	False	True	False	True	False		
IN	Bool	false	False	True	True	True	False		
Q	Bool	false	False	True	False	True	False		

LIA_DISCRETE_DONE / PLC_1 [CPU 1211C DC/DC/DC] / Program blocks / System blocks / Program resources

IEC_Timer_0_DB_6 [DB22]

IEC_Timer_0_DB_6 Properties							
General							
Name	IEC_Timer_0_DB_6	**Number**	22	**Type**	DB	**Language**	DB
Numbering	Automatic						
Information							
Title		**Author**	Simatic	**Comment**		**Family**	IEC
Version	1.0	**User-defined ID**	IEC_TMR				

Name	Data type	Start value	Retain	Accessible from HMI/OPC UA/Web API	Writable from HMI/OPC UA/Web API	Visible in HMI engineering	Setpoint	Supervision	Comment
▼ Static									
PT	Time	T#0ms	False	True	True	True	False		
ET	Time	T#0ms	False	True	False	True	False		
IN	Bool	false	False	True	True	True	False		
Q	Bool	false	False	True	False	True	False		

LIA_DISCRETE_DONE / PLC_1 [CPU 1211C DC/DC/DC] / Program blocks / System blocks / Program resources

IEC_Timer_0_DB_7 [DB23]

IEC_Timer_0_DB_7 Properties							
General							
Name	IEC_Timer_0_DB_7	**Number**	23	**Type**	DB	**Language**	DB
Numbering	Automatic						
Information							
Title		**Author**	Simatic	**Comment**		**Family**	IEC
Version	1.0	**User-defined ID**	IEC_TMR				

Name	Data type	Start value	Retain	Accessible from HMI/OPC UA/Web API	Writ-able from HMI/ OPC UA/ Web API	Visible in HMI engi-neering	Setpoint	Supervi-sion	Comment
▼ Static									
PT	Time	T#0ms	False	True	True	True	False		
ET	Time	T#0ms	False	True	False	True	False		
IN	Bool	false	False	True	True	True	False		
Q	Bool	false	False	True	False	True	False		

LIA_DISCRETE_DONE / PLC_1 [CPU 1211C DC/DC/DC] / Program blocks / System blocks / Program resources

IEC_Timer_0_DB_8 [DB24]

IEC_Timer_0_DB_8 Properties							
General							
Name	IEC_Timer_0_DB_8	**Number**	24	**Type**	DB	**Language**	DB
Numbering	Automatic						
Information							
Title		**Author**	Simatic	**Comment**		**Family**	IEC
Version	1.0	**User-defined ID**	IEC_TMR				

Name	Data type	Start value	Retain	Accessible from HMI/OPC UA/Web API	Writ-able from HMI/ OPC UA/ Web API	Visible in HMI engi-neering	Setpoint	Supervi-sion	Comment
▼ Static									
PT	Time	T#0ms	False	True	True	True	False		
ET	Time	T#0ms	False	True	False	True	False		
IN	Bool	false	False	True	True	True	False		
Q	Bool	false	False	True	False	True	False		

LIA_DISCRETE_DONE / PLC_1 [CPU 1211C DC/DC/DC] / Program blocks / System blocks / Program resources

IEC_Timer_0_DB_9 [DB25]

IEC_Timer_0_DB_9 Properties							
General							
Name	IEC_Timer_0_DB_9	**Number**	25	**Type**	DB	**Language**	DB
Numbering	Automatic						
Information							
Title		**Author**	Simatic	**Comment**		**Family**	IEC
Version	1.0	**User-defined ID**	IEC_TMR				

Name	Data type	Start value	Retain	Accessible from HMI/OPC UA/Web API	Writ-able from HMI/ OPC UA/ Web API	Visible in HMI engi-neering	Setpoint	Supervi-sion	Comment
▼ Static									
PT	Time	T#0ms	False	True	True	True	False		
ET	Time	T#0ms	False	True	False	True	False		
IN	Bool	false	False	True	True	True	False		
Q	Bool	false	False	True	False	True	False		

LIA_DISCRETE_DONE / PLC_1 [CPU 1211C DC/DC/DC] / Program blocks / System blocks / Program resources

IEC_Timer_0_DB_10 [DB26]

IEC_Timer_0_DB_10 Properties							
General							
Name	IEC_Timer_0_DB_10	**Number**	26	**Type**	DB	**Language**	DB
Numbering	Automatic						
Information							
Title		**Author**	Simatic	**Comment**		**Family**	IEC
Version	1.0	**User-defined ID**	IEC_TMR				

Name	Data type	Start value	Retain	Accessible from HMI/OPC UA/Web API	Writ-able from HMI/ OPC UA/ Web API	Visible in HMI engi-neering	Setpoint	Supervi-sion	Comment
▼ Static									
PT	Time	T#0ms	False	True	True	True	False		
ET	Time	T#0ms	False	True	False	True	False		
IN	Bool	false	False	True	True	True	False		
Q	Bool	false	False	True	False	True	False		

LIA_DISCRETE_DONE / PLC_1 [CPU 1211C DC/DC/DC] / Program blocks / System blocks / Program resources

IEC_Timer_0_DB_11 [DB27]

IEC_Timer_0_DB_11 Properties							
General							
Name	IEC_Timer_0_DB_11	**Number**	27	**Type**	DB	**Language**	DB
Numbering	Automatic						
Information							
Title		**Author**	Simatic	**Comment**		**Family**	IEC
Version	1.0	**User-defined ID**	IEC_TMR				

Name	Data type	Start value	Retain	Accessible from HMI/OPC UA/Web API	Writ-able from HMI/ OPC UA/ Web API	Visible in HMI engi-neering	Setpoint	Supervi-sion	Comment
▼ Static									
PT	Time	T#0ms	False	True	True	True	False		
ET	Time	T#0ms	False	True	False	True	False		
IN	Bool	false	False	True	True	True	False		
Q	Bool	false	False	True	False	True	False		

LIA_DISCRETE_DONE / PLC_1 [CPU 1211C DC/DC/DC] / Program blocks / System blocks / Program resources

IEC_Timer_0_DB_12 [DB28]

IEC_Timer_0_DB_12 Properties							
General							
Name	IEC_Timer_0_DB_12	**Number**	28	**Type**	DB	**Language**	DB
Numbering	Automatic						
Information							
Title		**Author**	Simatic	**Comment**		**Family**	IEC
Version	1.0	**User-defined ID**	IEC_TMR				

Name	Data type	Start value	Retain	Accessible from HMI/OPC UA/Web API	Writ-able from HMI/ OPC UA/ Web API	Visible in HMI engi-neering	Setpoint	Supervi-sion	Comment
▼ Static									
PT	Time	T#0ms	False	True	True	True	False		
ET	Time	T#0ms	False	True	False	True	False		
IN	Bool	false	False	True	True	True	False		
Q	Bool	false	False	True	False	True	False		

LIA_DISCRETE_DONE / PLC_1 [CPU 1211C DC/DC/DC] / Program blocks / System blocks / Program resources

IEC_Timer_0_DB_13 [DB14]

IEC_Timer_0_DB_13 Properties							
General							
Name	IEC_Timer_0_DB_13	**Number**	14	**Type**	DB	**Language**	DB
Numbering	Automatic						
Information							
Title		**Author**	Simatic	**Comment**		**Family**	IEC
Version	1.0	**User-defined ID**	IEC_TMR				

Name	Data type	Start value	Retain	Accessible from HMI/OPC UA/Web API	Writ-able from HMI/ OPC UA/ Web API	Visible in HMI engi-neering	Setpoint	Supervi-sion	Comment
▼ Static									
PT	Time	T#0ms	False	True	True	True	False		
ET	Time	T#0ms	False	True	False	True	False		
IN	Bool	false	False	True	True	True	False		
Q	Bool	false	False	True	False	True	False		

LIA_DISCRETE_DONE / PLC_1 [CPU 1211C DC/DC/DC] / Program blocks / System blocks / Program resources

IEC_Timer_0_DB_14 [DB29]

IEC_Timer_0_DB_14 Properties							
General							
Name	IEC_Timer_0_DB_14	**Number**	29	**Type**	DB	**Language**	DB
Numbering	Automatic						
Information							
Title		**Author**	Simatic	**Comment**		**Family**	IEC
Version	1.0	**User-defined ID**	IEC_TMR				

Name	Data type	Start value	Retain	Accessible from HMI/OPC UA/Web API	Writ-able from HMI/ OPC UA/ Web API	Visible in HMI engi-neering	Setpoint	Supervi-sion	Comment
▼ Static									
PT	Time	T#0ms	False	True	True	True	False		
ET	Time	T#0ms	False	True	False	True	False		
IN	Bool	false	False	True	True	True	False		
Q	Bool	false	False	True	False	True	False		

LIA_DISCRETE_DONE / PLC_1 [CPU 1211C DC/DC/DC] / Program blocks / System blocks / Program resources

IEC_Timer_0_DB_15 [DB30]

IEC_Timer_0_DB_15 Properties							
General							
Name	IEC_Timer_0_DB_15	**Number**	30	**Type**	DB	**Language**	DB
Numbering	Automatic						
Information							
Title		**Author**	Simatic	**Comment**		**Family**	IEC
Version	1.0	**User-defined ID**	IEC_TMR				

Name	Data type	Start value	Retain	Accessible from HMI/OPC UA/Web API	Writ-able from HMI/ OPC UA/ Web API	Visible in HMI engi-neering	Setpoint	Supervi-sion	Comment
▼ Static									
PT	Time	T#0ms	False	True	True	True	False		
ET	Time	T#0ms	False	True	False	True	False		
IN	Bool	false	False	True	True	True	False		
Q	Bool	false	False	True	False	True	False		

LIA_DISCRETE_DONE / PLC_1 [CPU 1211C DC/DC/DC] / Program blocks / System blocks / Program resources

IEC_Timer_0_DB_16 [DB31]

IEC_Timer_0_DB_16 Properties							
General							
Name	IEC_Timer_0_DB_16	**Number**	31	**Type**	DB	**Language**	DB
Numbering	Automatic						
Information							
Title		**Author**	Simatic	**Comment**		**Family**	IEC
Version	1.0	**User-defined ID**	IEC_TMR				

Name	Data type	Start value	Retain	Accessible from HMI/OPC UA/Web API	Writ-able from HMI/ OPC UA/ Web API	Visible in HMI engi-neering	Setpoint	Supervi-sion	Comment
▼ Static									
PT	Time	T#0ms	False	True	True	True	False		
ET	Time	T#0ms	False	True	False	True	False		
IN	Bool	false	False	True	True	True	False		
Q	Bool	false	False	True	False	True	False		

LIA_DISCRETE_DONE / PLC_1 [CPU 1211C DC/DC/DC] / Program blocks / System blocks / Program resources

IEC_Timer_0_DB_17 [DB32]

IEC_Timer_0_DB_17 Properties							
General							
Name	IEC_Timer_0_DB_17	**Number**	32	**Type**	DB	**Language**	DB
Numbering	Automatic						
Information							
Title		**Author**	Simatic	**Comment**		**Family**	IEC
Version	1.0	**User-defined ID**	IEC_TMR				

Name	Data type	Start value	Retain	Accessible from HMI/OPC UA/Web API	Writ-able from HMI/ OPC UA/ Web API	Visible in HMI engi-neering	Setpoint	Supervi-sion	Comment
▼ Static									
PT	Time	T#0ms	False	True	True	True	False		
ET	Time	T#0ms	False	True	False	True	False		
IN	Bool	false	False	True	True	True	False		
Q	Bool	false	False	True	False	True	False		

LIA_DISCRETE_DONE / PLC_1 [CPU 1211C DC/DC/DC] / Program blocks / System blocks / Program resources

IEC_Timer_0_DB_18 [DB33]

IEC_Timer_0_DB_18 Properties							
General							
Name	IEC_Timer_0_DB_18	**Number**	33	**Type**	DB	**Language**	DB
Numbering	Automatic						
Information							
Title		**Author**	Simatic	**Comment**		**Family**	IEC
Version	1.0	**User-defined ID**	IEC_TMR				

Name	Data type	Start value	Retain	Accessible from HMI/OPC UA/Web API	Writ-able from HMI/ OPC UA/ Web API	Visible in HMI engi-neering	Setpoint	Supervi-sion	Comment
▼ Static									
PT	Time	T#0ms	False	True	True	True	False		
ET	Time	T#0ms	False	True	False	True	False		
IN	Bool	false	False	True	True	True	False		
Q	Bool	false	False	True	False	True	False		

LIA_DISCRETE_DONE / PLC_1 [CPU 1211C DC/DC/DC] / Program blocks / System blocks / Program resources

IEC_Timer_0_DB_19 [DB34]

IEC_Timer_0_DB_19 Properties							
General							
Name	IEC_Timer_0_DB_19	**Number**	34	**Type**	DB	**Language**	DB
Numbering	Automatic						
Information							
Title		**Author**	Simatic	**Comment**		**Family**	IEC
Version	1.0	**User-defined ID**	IEC_TMR				

Name	Data type	Start value	Retain	Accessible from HMI/OPC UA/Web API	Writ-able from HMI/ OPC UA/ Web API	Visible in HMI engi-neering	Setpoint	Supervi-sion	Comment
▼ Static									
PT	Time	T#0ms	False	True	True	True	False		
ET	Time	T#0ms	False	True	False	True	False		
IN	Bool	false	False	True	True	True	False		
Q	Bool	false	False	True	False	True	False		

LIA_DISCRETE_DONE / PLC_1 [CPU 1211C DC/DC/DC] / Program blocks / System blocks / Program resources

IEC_Timer_0_DB_20 [DB35]

IEC_Timer_0_DB_20 Properties							
General							
Name	IEC_Timer_0_DB_20	**Number**	35	**Type**	DB	**Language**	DB
Numbering	Automatic						
Information							
Title		**Author**	Simatic	**Comment**		**Family**	IEC
Version	1.0	**User-defined ID**	IEC_TMR				

Name	Data type	Start value	Retain	Accessible from HMI/OPC UA/Web API	Writ-able from HMI/ OPC UA/ Web API	Visible in HMI engi-neering	Setpoint	Supervi-sion	Comment
▼ Static									
PT	Time	T#0ms	False	True	True	True	False		
ET	Time	T#0ms	False	True	False	True	False		
IN	Bool	false	False	True	True	True	False		
Q	Bool	false	False	True	False	True	False		

LIA_DISCRETE_DONE / PLC_1 [CPU 1211C DC/DC/DC]

Technology objects

This folder is empty.

LIA_DISCRETE_DONE / PLC_1 [CPU 1211C DC/DC/DC] / PLC tags / Standard-Variablentabelle [46]

PLC tags

PLC tags

	Name	Data type	Address	Retain	Accessible from HMI/OPC UA/Web API	Writable from HMI/OPC UA/Web API	Visible in HMI engineering	Supervision	Comment
	Clock_Byte	Byte	%MB0	False	True	True	True		
	Clock_10Hz	Bool	%M0.0	False	True	True	True		
	Clock_5Hz	Bool	%M0.1	False	True	True	True		
	Clock_2.5Hz	Bool	%M0.2	False	True	True	True		
	Clock_2Hz	Bool	%M0.3	False	True	True	True		
	Clock_1.25Hz	Bool	%M0.4	False	True	True	True		
	Clock_1Hz	Bool	%M0.5	False	True	True	True		
	Clock_0.625Hz	Bool	%M0.6	False	True	True	True		
	Clock_0.5Hz	Bool	%M0.7	False	True	True	True		
	System_Byte	Byte	%MB1	False	True	True	True		
	FirstScan	Bool	%M1.0	False	True	True	True		
	DiagStatusUpdate	Bool	%M1.1	False	True	True	True		
	AlwaysTRUE	Bool	%M1.2	False	True	True	True		
	AlwaysFALSE	Bool	%M1.3	False	True	True	True		

LIA_DISCRETE_DONE / PLC_1 [CPU 1211C DC/DC/DC] / PLC tags / Standard-Variablentabelle [46]

User constants

User constants				
	Name	Data type	Value	Comment

LIA_DISCRETE_DONE / PLC_1 [CPU 1211C DC/DC/DC] / PLC tags / INPUTS [63]

PLC tags

PLC tags

	Name	Data type	Address	Retain	Accessible from HMI/OPC UA/Web API	Writable from HMI/OPC UA/Web API	Visible in HMI engineering	Supervision	Comment
	START	Bool	%I0.0	False	True	True	True		
	STOP	Bool	%I0.1	False	True	True	True		
	MANUAL	Bool	%I0.2	False	True	True	True		
	AUTO	Bool	%I0.3	False	True	True	True		
	E STOP 1	Bool	%I0.4	False	True	True	True		
	E STOP 2	Bool	%I0.5	False	True	True	True		
	E STOP 3	Bool	%I0.6	False	True	True	True		
	E STOP 4	Bool	%I0.7	False	True	True	True		
	E STOP 5	Bool	%I1.0	False	True	True	True		
	E STOP 6	Bool	%I1.1	False	True	True	True		
	BLUE SENSOR	Bool	%I1.2	False	True	True	True		
	METAL SENSOR	Bool	%I1.3	False	True	True	True		
	GREEN SENSOR	Bool	%I1.4	False	True	True	True		
	TURN TABLE 0	Bool	%I1.5	False	True	True	True		
	TURN TABLE 90	Bool	%I1.6	False	True	True	True		
	TURN TABLE F LIMIT	Bool	%I1.7	False	True	True	True		
	TURN TABLE B LIMIT	Bool	%I2.0	False	True	True	True		
	P&P B (DETECTED)	Bool	%I2.2	False	True	True	True		
	P&P B (C)	Bool	%I2.3	False	True	True	True		
	V SENSOR B B	Bool	%I2.4	False	True	True	True		
	V SENSOR B L	Bool	%I2.5	False	True	True	True		
	V SENSOR B B 2	Bool	%I2.6	False	True	True	True		
	V SENSOR B L 2	Bool	%I2.7	False	True	True	True		
	ROBOT B D SENSOR	Bool	%I3.0	False	True	True	True		
	P&P M (DETECTED)	Bool	%I3.2	False	True	True	True		
	P&P M (C)	Bool	%I3.3	False	True	True	True		
	V SENSOR M B 2	Bool	%I3.4	False	True	True	True		
	V SENSOR M L 2	Bool	%I3.5	False	True	True	True		
	ROBOT M D SENSOR	Bool	%I3.6	False	True	True	True		
	P&P G (DETECTED)	Bool	%I4.0	False	True	True	True		
	P&P G (C)	Bool	%I4.1	False	True	True	True		
	V SENSOR G B	Bool	%I4.2	False	True	True	True		
	V SENSOR G L	Bool	%I4.3	False	True	True	True		
	V SENSOR G B 2	Bool	%I4.4	False	True	True	True		
	V SENSOR G L 2	Bool	%I4.5	False	True	True	True		
	ROBOT G D SENSOR	Bool	%I4.6	False	True	True	True		
	SAFETY D 1	Bool	%I5.0	False	True	True	True		
	SAFETY D 2	Bool	%I5.1	False	True	True	True		
	SAFETY D 3	Bool	%I5.2	False	True	True	True		
	SAFETY D 4	Bool	%I5.3	False	True	True	True		
	SAFETY D 5	Bool	%I5.4	False	True	True	True		
	SAFETY D 6	Bool	%I5.5	False	True	True	True		
	SAFETY D 7	Bool	%I5.6	False	True	True	True		
	P&P B X POS	DInt	%ID16	False	True	True	True		
	P&P B Y POS	DInt	%ID20	False	True	True	True		
	P&P B Z POS	DInt	%ID24	False	True	True	True		
	P&P M X POS	DInt	%ID28	False	True	True	True		
	P&P M Y POS	DInt	%ID32	False	True	True	True		
	P&P M Z POS	DInt	%ID36	False	True	True	True		
	P&P G X POS	DInt	%ID40	False	True	True	True		
	P&P G Y POS	DInt	%ID44	False	True	True	True		
	P&P G Z POS	DInt	%ID48	False	True	True	True		
	V SENSOR M B	Bool	%I6.0	False	True	True	True		
	V SENSOR M L	Bool	%I6.1	False	True	True	True		
	ROBOT B D SENSOR 2	Bool	%I6.2	False	True	True	True		

	Name	Data type	Address	Retain	Accessible from HMI/OPC UA/Web API	Writable from HMI/OPC UA/Web API	Visible in HMI engineering	Supervision	Comment
	ROBOT M D SENSOR 2	Bool	%I6.3	False	True	True	True		
	ROBOT G D SENSOR 2	Bool	%I6.4	False	True	True	True		
	ROBOT B D SENSOR 3	Bool	%I6.5	False	True	True	True		
	ROBOT B D SENSOR 4	Bool	%I6.6	False	True	True	True		
	ROBOT M D SENSOR 3	Bool	%I6.7	False	True	True	True		
	ROBOT M D SENSOR 4	Bool	%I7.0	False	True	True	True		
	ROBOT G D SENSOR 3	Bool	%I7.1	False	True	True	True		
	ROBOT G D SENSOR 4	Bool	%I7.2	False	True	True	True		

LIA_DISCRETE_DONE / PLC_1 [CPU 1211C DC/DC/DC] / PLC tags / INPUTS [63]

User constants

User constants				
	Name	Data type	Value	Comment

LIA_DISCRETE_DONE / PLC_1 [CPU 1211C DC/DC/DC] / PLC tags / MEMORIES [18]

PLC tags

PLC tags

	Name	Data type	Address	Retain	Accessible from HMI/OPC UA/Web API	Writable from HMI/OPC UA/Web API	Visible in HMI engineering	Supervision	Comment
	BLUE	Bool	%M10.0	False	True	True	True		
	GREEN	Bool	%M10.1	False	True	True	True		
	STARTAUTO	Bool	%M10.3	False	True	True	True		
	METAL	Bool	%M10.4	False	True	True	True		
	NEGATIVE RISE	Bool	%M10.5	False	True	True	True		
	NEGATIVE RISE 2	Bool	%M10.6	False	True	True	True		
	NEGATIVE RISE 3	Bool	%M10.7	False	True	True	True		
	BLUENB	Int	%MW11	False	True	True	True		
	EMERGENCY STOP	Bool	%M13.0	False	True	True	True		
	METALNB	Int	%MW40	False	True	True	True		
	GREENNB	Int	%MW14	False	True	True	True		
	NEGATIVE RISE G	Bool	%M16.0	False	True	True	True		
	NEGATIVE RISE G(1)	Bool	%M16.1	False	True	True	True		
	NEGATIVE RISE G(2)	Bool	%M16.2	False	True	True	True		
	NEGATIVE RISE M	Bool	%M16.3	False	True	True	True		
	NEGATIVE RISE M(1)	Bool	%M16.4	False	True	True	True		
	NEGATIVE RISE M(2)	Bool	%M20.0	False	True	True	True		
	TOTALNB	Int	%MW18	False	True	True	True		

LIA_DISCRETE_DONE / PLC_1 [CPU 1211C DC/DC/DC] / PLC tags / MEMORIES [18]

User constants

User constants				
	Name	Data type	Value	Comment

LIA_DISCRETE_DONE / PLC_1 [CPU 1211C DC/DC/DC] / PLC tags / OUTPUTS [75]

PLC tags

PLC tags

	Name	Data type	Address	Retain	Accessible from HMI/OPC UA/Web API	Writable from HMI/OPC UA/Web API	Visible in HMI engineering	Supervision	Comment
	ACTIVE LIGHT	Bool	%Q0.0	False	True	True	True		
	USELESS LIGHT	Bool	%Q0.1	False	True	True	True		
	STOPPED LIGHT	Bool	%Q0.2	False	True	True	True		
	EMiTTER	Bool	%Q0.3	False	True	True	True		
	WARN 1	Bool	%Q0.4	False	True	True	True		
	WARN 2	Bool	%Q0.5	False	True	True	True		
	WARN 3	Bool	%Q0.6	False	True	True	True		
	WARN 4	Bool	%Q0.7	False	True	True	True		
	WARN 5	Bool	%Q1.0	False	True	True	True		
	WARN 6	Bool	%Q1.1	False	True	True	True		
	START (LIGHT)	Bool	%Q1.2	False	True	True	True		
	STOP (LIGHT)	Bool	%Q1.3	False	True	True	True		
	TURN TABLE TURN	Bool	%Q1.4	False	True	True	True		
	TURN TABLE +	Bool	%Q1.5	False	True	True	True		
	TURN TABLE -	Bool	%Q1.6	False	True	True	True		
	CONV EMITTER	Bool	%Q2.0	False	True	True	True		
	CONV B 1	Bool	%Q2.2	False	True	True	True		
	CONV B 2	Bool	%Q2.3	False	True	True	True		
	CONV B 3	Bool	%Q2.4	False	True	True	True		
	CONV B 4	Bool	%Q2.5	False	True	True	True		
	CONV B 5	Bool	%Q2.6	False	True	True	True		
	CONV B 6	Bool	%Q2.7	False	True	True	True		
	CONV B 7	Bool	%Q3.0	False	True	True	True		
	CONV B 8	Bool	%Q3.1	False	True	True	True		
	CONV B 9 (+)	Bool	%Q3.2	False	True	True	True		
	CONV B 9 (-)	Bool	%Q3.3	False	True	True	True		
	STOPPER B 1	Bool	%Q3.4	False	True	True	True		
	STOPPER B 2	Bool	%Q3.5	False	True	True	True		
	P&P B (GRAB)	Bool	%Q3.6	False	True	True	True		
	P&P B C(+)	Bool	%Q3.7	False	True	True	True		
	PUSHER B	Bool	%Q4.0	False	True	True	True		
	PALLET B REMOVER	Bool	%Q4.1	False	True	True	True		
	BLUE REMOVER	Bool	%Q4.2	False	True	True	True		
	CONV M 1	Bool	%Q4.4	False	True	True	True		
	CONV M 2	Bool	%Q4.5	False	True	True	True		
	CONV M 3	Bool	%Q4.6	False	True	True	True		
	CONV M 4(+)	Bool	%Q4.7	False	True	True	True		
	CONV 4 (-)	Bool	%Q5.0	False	True	True	True		
	STOPPER M 1	Bool	%Q5.1	False	True	True	True		
	STOPPER M 2	Bool	%Q5.2	False	True	True	True		
	P&P M (GRAB)	Bool	%Q5.3	False	True	True	True		
	P&P M C(+)	Bool	%Q5.4	False	True	True	True		
	PUSHER M	Bool	%Q5.5	False	True	True	True		
	PALLET M REMOVER	Bool	%Q5.6	False	True	True	True		
	METAL REMOVER	Bool	%Q5.7	False	True	True	True		
	CONV G 1	Bool	%Q6.1	False	True	True	True		
	CONV G 2	Bool	%Q6.2	False	True	True	True		
	CONV G 3	Bool	%Q6.3	False	True	True	True		
	CONV G 4	Bool	%Q6.4	False	True	True	True		
	CONV G 5	Bool	%Q6.5	False	True	True	True		
	CONV G 6	Bool	%Q6.6	False	True	True	True		
	CONV G 7	Bool	%Q6.7	False	True	True	True		
	CONV G 8	Bool	%Q7.0	False	True	True	True		
	CONV G 9(+)	Bool	%Q7.1	False	True	True	True		
	COV G 9(-)	Bool	%Q7.2	False	True	True	True		

	Name	Data type	Address	Retain	Accessible from HMI/OPC UA/Web API	Writable from HMI/OPC UA/Web API	Visible in HMI engineering	Supervision	Comment
	STOPPER G 1	Bool	%Q7.3	False	True	True	True		
	STOPPER G 2	Bool	%Q7.4	False	True	True	True		
	P&P G (GRAB)	Bool	%Q7.5	False	True	True	True		
	P&P G C(+)	Bool	%Q7.6	False	True	True	True		
	PUSHER G	Bool	%Q7.7	False	True	True	True		
	PALLET G REMOVER	Bool	%Q8.0	False	True	True	True		
	GREEN REMOVER	Bool	%Q8.1	False	True	True	True		
	P&P_B_X	DWord	%QD8	False	True	True	True		
	P&P_B_Y	DWord	%QD12	False	True	True	True		
	P&P_B_Z	DWord	%QD16	False	True	True	True		
	P&P_M_X	DWord	%QD20	False	True	True	True		
	P&P_M_Y	DWord	%QD24	False	True	True	True		
	P&P_M_Z	DWord	%QD28	False	True	True	True		
	P&P_G_X	DWord	%QD32	False	True	True	True		
	P&P_G_Y	DWord	%QD36	False	True	True	True		
	P&P_G_Z	DWord	%QD40	False	True	True	True		
	COUNTER	DWord	%QD44	False	True	True	True		
	B COUNTER	DWord	%QD48	False	True	True	True		
	M COUNTER	DWord	%QD52	False	True	True	True		
	G COUNTER	DWord	%QD56	False	True	True	True		

LIA_DISCRETE_DONE / PLC_1 [CPU 1211C DC/DC/DC] / PLC tags / OUTPUTS [75]

User constants

User constants				
	Name	Data type	Value	Comment

LIA_DISCRETE_DONE / PLC_1 [CPU 1211C DC/DC/DC] / PLC tags / STEPS-TAGS [55]

PLC tags

PLC tags

	Name	Data type	Address	Retain	Accessible from HMI/OPC UA/Web API	Writable from HMI/OPC UA/Web API	Visible in HMI engineering	Supervision	Comment
	C0	Bool	%M2.0	False	True	True	True		
	C1	Bool	%M2.1	False	True	True	True		
	C3	Bool	%M2.2	False	True	True	True		
	1	Bool	%M2.3	False	True	True	True		
	2	Bool	%M2.4	False	True	True	True		
	3	Bool	%M2.5	False	True	True	True		
	3.1	Bool	%M2.6	False	True	True	True		
	4	Bool	%M2.7	False	True	True	True		
	0	Bool	%M3.0	False	True	True	True		
	2.1	Bool	%M3.1	False	True	True	True		
	0 RB	Bool	%M3.2	False	True	True	True		
	1 RB	Bool	%M3.3	False	True	True	True		
	2 RB	Bool	%M3.4	False	True	True	True		
	1 RB 2	Bool	%M3.5	False	True	True	True		
	2 RB 2	Bool	%M3.6	False	True	True	True		
	3 RB 2	Bool	%M3.7	False	True	True	True		
	4 RB 2	Bool	%M4.0	False	True	True	True		
	5 RB 2	Bool	%M4.1	False	True	True	True		
	6 RB 2	Bool	%M4.2	False	True	True	True		
	1 RB 3	Bool	%M4.3	False	True	True	True		
	2 RB 3	Bool	%M4.4	False	True	True	True		
	3 RB 3	Bool	%M4.5	False	True	True	True		
	4 RB 3	Bool	%M4.6	False	True	True	True		
	5 RB 3	Bool	%M4.7	False	True	True	True		
	6 RB 3	Bool	%M5.0	False	True	True	True		
	0 RM	Bool	%M5.1	False	True	True	True		
	1 RM	Bool	%M5.2	False	True	True	True		
	2 RM	Bool	%M5.3	False	True	True	True		
	1 RM 2	Bool	%M5.4	False	True	True	True		
	2 RM 2	Bool	%M5.5	False	True	True	True		
	3 RM 2	Bool	%M5.6	False	True	True	True		
	4 RM 2	Bool	%M5.7	False	True	True	True		
	5 RM 2	Bool	%M6.0	False	True	True	True		
	6 RM 2	Bool	%M6.1	False	True	True	True		
	1 RM 3	Bool	%M6.2	False	True	True	True		
	2 RM 3	Bool	%M6.3	False	True	True	True		
	3 RM 3	Bool	%M6.4	False	True	True	True		
	4 RM 3	Bool	%M6.5	False	True	True	True		
	5 RM 3	Bool	%M6.6	False	True	True	True		
	6 RM 3	Bool	%M6.7	False	True	True	True		
	0 RG	Bool	%M7.0	False	True	True	True		
	1 RG	Bool	%M7.1	False	True	True	True		
	2 RG	Bool	%M7.2	False	True	True	True		
	1 RG 2	Bool	%M7.3	False	True	True	True		
	2 RG 2	Bool	%M7.4	False	True	True	True		
	3 RG 2	Bool	%M7.5	False	True	True	True		
	4 RG 2	Bool	%M7.6	False	True	True	True		
	5 RG 2	Bool	%M7.7	False	True	True	True		
	6 RG 2	Bool	%M8.0	False	True	True	True		
	1 RG 3	Bool	%M8.1	False	True	True	True		
	2 RG 3	Bool	%M8.2	False	True	True	True		
	3 RG 3	Bool	%M8.3	False	True	True	True		
	4 RG 3	Bool	%M8.4	False	True	True	True		
	5 RG 3	Bool	%M8.5	False	True	True	True		
	6 RG 3	Bool	%M8.6	False	True	True	True		

LIA_DISCRETE_DONE / PLC_1 [CPU 1211C DC/DC/DC] / PLC tags / STEPS-TAGS [55]

User constants

User constants				
	Name	Data type	Value	Comment

LIA_DISCRETE_DONE / PLC_1 [CPU 1211C DC/DC/DC] / PLC data types

System data types

This folder is empty.

LIA_DISCRETE_DONE / PLC_1 [CPU 1211C DC/DC/DC] / Watch and force tables

Forcetabelle

Name	Address	Display format	Force value	Comment

LIA_DISCRETE_DONE / PLC_1 [CPU 1211C DC/DC/DC]

Traces

Name

LIA_DISCRETE_DONE / PLC_1 [CPU 1211C DC/DC/DC] / Traces

Measurements

This folder is empty.

LIA_DISCRETE_DONE / PLC_1 [CPU 1211C DC/DC/DC] / Traces

Combined measurements

Name

LIA_DISCRETE_DONE / PLC_1 [CPU 1211C DC/DC/DC]


PLC alarm text lists

This folder is empty.

LIA_DISCRETE_DONE / PLC_1 [CPU 1211C DC/DC/DC] / Local modules

PLC_1 [CPU 1211C DC/DC/DC]

PLC_1					
General\Project information					
Name	PLC_1	**Author**	i72014	**Comment**	
Slot	1	**Rack**	0		
General\Catalog information					
Short designation	CPU 1211C DC/DC/DC	**Description**	Work memory 50 KB; 24VDC power supply with DI6 x 24VDC SINK/SOURCE, DQ4 x 24VDC and AI2 on board; 3 high-speed counters (expandable with digital signal board) and 4 pulse outputs on board; signal board expands on-board I/O; up to 3 communication modules for serial communication; PROFINET interface for programming, HMI and PLC to PLC communication	**Article number**	6ES7 211-1AE40-0XB0
Firmware version	V4.1		False		
General\Identification & Maintenance					
Plant designation		**Location identifier**		**Installation date**	2016-04-07 09:52:18.455
Additional information					
PROFINET interface [X1]\General					
Name	PROFINET-Schnittstelle_1	**Author**	i72014	**Comment**	
PROFINET interface [X1]\General\Project information					
Name	DI 6/DQ 4_1	**Comment**		**Name**	AI 2_1
Comment					
PROFINET interface [X1]\Ethernet addresses\Interface networked with					
Subnet:	Not connected				
PROFINET interface [X1]\Ethernet addresses\Internet protocol version 4 (IPv4)					
IP configuration	Set IP address in the project	**IP address:**	192.168.0.1	**Subnet mask:**	255.255.255.0
Use router	False				
PROFINET interface [X1]\Ethernet addresses\PROFINET					
PROFINET device name is set directly at the device	False	**Generate PROFINET device name automatically**	True	**PROFINET device name:**	plc_1
Converted name:	plcxb1d0ed	**Device number:**	0		
PROFINET interface [X1]\Time synchronization					
Enable time synchronization via NTP server	Enable time synchronization via NTP server		IP addresses	**Server 1**	0.0.0.0
Server 2	0.0.0.0	**Server 3**	0.0.0.0	**Server 4**	0.0.0.0
Update interval	10sec				
PROFINET interface [X1]\Digital inputs\Channel0					
Channel address	I0.0	**Input filters**	6.4 millisec	**Enable pulse catch**	0
PROFINET interface [X1]\Digital inputs\Channel0					
Enable rising edge detection	0	**Prefix Event Rising Edge**	49152	**Event name:**	0
Hardware interrupt:	0	**Rising edge0**	Rising edge0		
PROFINET interface [X1]\Digital inputs\Channel0					
Enable falling edge detection	0	**Prefix Event Falling Edge**	49280	**Event name:**	0
Hardware interrupt:	0	**Falling edge0**	Falling edge0		
PROFINET interface [X1]\Digital inputs\Channel1					
Channel address	I0.1	**Input filters**	6.4 millisec	**Enable pulse catch**	0
PROFINET interface [X1]\Digital inputs\Channel1					
Enable rising edge detection	0	**Prefix Event Rising Edge**	49153	**Event name:**	0
Hardware interrupt:	0	**Rising edge1**	Rising edge1		
PROFINET interface [X1]\Digital inputs\Channel1					
Enable falling edge detection	0	**Prefix Event Falling Edge**	49281	**Event name:**	0
Hardware interrupt:	0	**Falling edge1**	Falling edge1		
PROFINET interface [X1]\Digital inputs\Channel2					
Channel address	I0.2	**Input filters**	6.4 millisec	**Enable pulse catch**	0
PROFINET interface [X1]\Digital inputs\Channel2					
Enable rising edge detection	0	**Prefix Event Rising Edge**	49154	**Event name:**	0
Hardware interrupt:	0	**Rising edge2**	Rising edge2		
PROFINET interface [X1]\Digital inputs\Channel2					
Enable falling edge detection	0	**Prefix Event Falling Edge**	49282	**Event name:**	0
Hardware interrupt:	0	**Falling edge2**	Falling edge2		
PROFINET interface [X1]\Digital inputs\Channel3					
Channel address	I0.3	**Input filters**	6.4 millisec	**Enable pulse catch**	0
PROFINET interface [X1]\Digital inputs\Channel3					
Enable rising edge detection	0	**Prefix Event Rising Edge**	49155	**Event name:**	0
Hardware interrupt:	0	**Rising edge3**	Rising edge3		
PROFINET interface [X1]\Digital inputs\Channel3					
Enable falling edge detection	0	**Prefix Event Falling Edge**	49283	**Event name:**	0
Hardware interrupt:	0	**Falling edge3**	Falling edge3		
PROFINET interface [X1]\Digital inputs\Channel4					
Channel address	I0.4	**Input filters**	6.4 millisec	**Enable pulse catch**	0

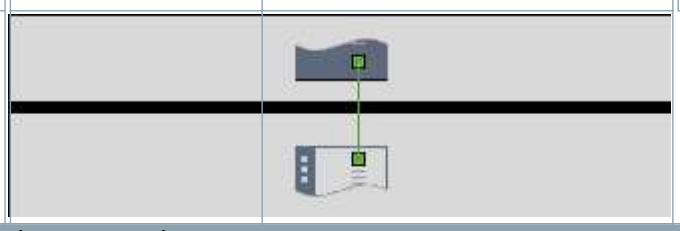PROFINET interface [X1]\Digital inputs\Channel4					
Enable rising edge detection	0	**Prefix Event Rising Edge**	49156	**Event name:**	0
Hardware interrupt:	0	**Rising edge4**	Rising edge4		
PROFINET interface [X1]\Digital inputs\Channel4					
Enable falling edge detection	0	**Prefix Event Falling Edge**	49284	**Event name:**	0
Hardware interrupt:	0	**Falling edge4**	Falling edge4		
PROFINET interface [X1]\Digital inputs\Channel5					
Channel address	I0.5	**Input filters**	6.4 millisec	**Enable pulse catch**	0
PROFINET interface [X1]\Digital inputs\Channel5					
Enable rising edge detection	0	**Prefix Event Rising Edge**	49157	**Event name:**	0
Hardware interrupt:	0	**Rising edge5**	Rising edge5		
PROFINET interface [X1]\Digital inputs\Channel5					
Enable falling edge detection	0	**Prefix Event Falling Edge**	49285	**Event name:**	0
Hardware interrupt:	0	**Falling edge5**	Falling edge5		
PROFINET interface [X1]\Analog inputs\Noise reduction					
Integration time	50 Hz (20 ms)				
PROFINET interface [X1]\Analog inputs\Channel0					
Channel address	IW64	**Measurement type**	Voltage	**Voltage range**	0..10 V
Smoothing	Weak (4 cycles)			**Enable overflow diagnostics**	1
PROFINET interface [X1]\Analog inputs\Channel1					
Channel address	IW66	**Measurement type**	Voltage	**Voltage range**	0..10 V
Smoothing	Weak (4 cycles)			**Enable overflow diagnostics**	1
PROFINET interface [X1]\Digital outputs					
Reaction to CPU STOP	Use substitute value				
PROFINET interface [X1]\Digital outputs\Channel0					
Channel address	Q0.0	**Substitute a value of 1 on a change from RUN to STOP.**	0		
PROFINET interface [X1]\Digital outputs\Channel1					
Channel address	Q0.1	**Substitute a value of 1 on a change from RUN to STOP.**	0		
PROFINET interface [X1]\Digital outputs\Channel2					
Channel address	Q0.2	**Substitute a value of 1 on a change from RUN to STOP.**	0		
PROFINET interface [X1]\Digital outputs\Channel3					
Channel address	Q0.3	**Substitute a value of 1 on a change from RUN to STOP.**	0		
PROFINET interface [X1]\Operating mode					
IO controller	True	**IO system**		**Device number**	0
IO device	False				
PROFINET interface [X1]\I/O addresses\Input addresses					
Start address	0.0	**End address**	0.7	**Organization block**	65535
Process image	65535				
PROFINET interface [X1]\I/O addresses\Input addresses					
Start address	64	**End address**	67	**Organization block**	65535
Process image	65535				
PROFINET interface [X1]\I/O addresses\Output addresses					
Start address	0.0	**End address**	0.7	**Organization block**	0
Process image	0				
PROFINET interface [X1]\Advanced options\Interface options					
Support device replacement without exchangeable medium	True	**Permit overwriting of device names of all assigned IO devices**	False	**Use IEC V2.2 LLDP mode**	False
Keep-Alive connection monitoring:	30s				
PROFINET interface [X1]\Advanced options\Real time settings\IO communication					
Send clock:	1.000ms				
PROFINET interface [X1]\Advanced options\Real time settings\Real time options					
Calculated bandwidth for cyclic IO data:	0.000ms	**Calculated bandwidth for cyclic IO data:**	0.000%		
PROFINET interface [X1]\Advanced options\Port [X1 P1]\General					
Name	Port_1	**Author**	i72014	**Comment**	
PROFINET interface [X1]\Advanced options\Port [X1 P1]\Port interconnection\Local port:					
Local port:	PLC_1\PROFINET-Schnittstelle_1 [X1]\Port_1 [X1 P1]	**Medium:**	Copper	**Cable name:**	---
					
PROFINET interface [X1]\Advanced options\Port [X1 P1]\Port interconnection\Partner port:					
	Monitoring of partner port is not possible	**Partner port:**	Any partner		
PROFINET interface [X1]\Advanced options\Port [X1 P1]\Port options\Activate					
Activate this port for use	True				

PROFINET interface [X1]\Advanced options\Port [X1 P1]\Port options\Connection					
Transmission rate / duplex:	Automatic	**Monitor**	False	**Enable autonegotiation**	True
PROFINET interface [X1]\Advanced options\Port [X1 P1]\Port options\Boundaries					
End of detection of accessible devices	False	**End of topology discovery**	False	**End of the sync domain**	False
PROFINET interface [X1]\Web server access					
Enable Web server for the IP address of this interface	False	**The Web server must also be activated in the properties of the PLC.**			
High speed counters (HSC)\HSC1\General\Enable					
Enable this high speed counter	0	**Enable this high speed counter**	0	**Enable this high speed counter**	0
Enable this high speed counter	0	**Enable this high speed counter**	0	**Enable this high speed counter**	0
High speed counters (HSC)\HSC1\General\Project information					
Name	HSC_1	**Comment**		**Name**	HSC_2
Comment		**Name**	HSC_3	**Comment**	
Name	HSC_4	**Comment**		**Name**	HSC_5
Comment		**Name**	HSC_6	**Comment**	
High speed counters (HSC)\HSC1\I/O addresses\Input addresses					
Start address	1000.0	**End address**	1003.7	**Start address**	1004.0
End address	1007.7	**Organization block**	0	**Start address**	1008.0
End address	1011.7	**Organization block**	0	**Process image**	0
Start address	1012.0	**End address**	1015.7	**Organization block**	0
Process image	0	**Start address**	1016.0	**End address**	1019.7
Organization block	0	**Process image**	0	**Start address**	1020.0
End address	1023.7	**Organization block**	0	**Process image**	0
Organization block	0	**Process image**	0	**Process image**	0
Pulse generators (PTO/PWM)\PTO1/PWM1\General\Enable					
Enable this pulse generator	0	**Enable this pulse generator**	0		
Pulse generators (PTO/PWM)\PTO1/PWM1\General\Project information					
Name	Pulse_1	**Comment**		**Name**	Pulse_2
Comment					
Pulse generators (PTO/PWM)\PTO1/PWM1\I/O addresses\Output addresses					
Start address	1000.0	**End address**	1001.7	**Start address**	1002.0
End address	1003.7	**Organization block**	0	**Organization block**	0
Process image	0	**Process image**	0		
Startup					
Startup after POWER ON	Warm restart - mode before POWER OFF	**Comparison preset to actual configuration**	Startup CPU even if mismatch	**Configuration time**	60000ms
OBs should be interruptible	1				
Cycle					
Cycle monitoring time [ms]	150ms			**Enable minimum cycle time for cyclic OBs**	1
Minimum cycle time	30ms				
Communication load					
Cycle load due to communication [%]	20%				
System and clock memory\System memory bits					
Enable the use of system memory byte	1	**Address of system memory byte (MBx)**	1	**First cycle**	%M1.0 (FirstScan)
Diagnostic status changed	%M1.1 (DiagStatusUpdate)	**Always 1 (high)**	%M1.2 (AlwaysTRUE)	**Always 0 (low)**	%M1.3 (AlwaysFALSE)
System and clock memory\Clock memory bits					
Enable the use of clock memory byte	1	**Address of clock memory byte (MBx)**	0	**10 Hz clock**	%M0.0 (Clock_10Hz)
5 Hz clock	%M0.1 (Clock_5Hz)	**2.5 Hz clock**	%M0.2 (Clock_2.5Hz)	**2 Hz clock**	%M0.3 (Clock_2Hz)
1.25 Hz clock	%M0.4 (Clock_1.25Hz)	**1 Hz clock**	%M0.5 (Clock_1Hz)	**0.625 Hz clock**	%M0.6 (Clock_0.625Hz)
0.5 Hz clock	%M0.7 (Clock_0.5Hz)				
Web server\General					
Activate Web server on all modules of this device	False	**Permit access only with HTTPS**	True		
Web server\Automatic update					
Enable automatic update	True	**Update interval**	0s		

Web server\User interface languages

Assign project language	User interface languages
English (United States)	German
English (United States)	English
English (United States)	French
English (United States)	Spanish
English (United States)	Italian
English (United States)	Chinese (simplified)

Web server\User management

User name	User rights
Everybody	

Web server\User-defined web pages

Application name	HTML source path	Default HTML page	Files with dynamic content	Web DB number	Fragment DB number
		index.htm	.htm;.html	333	334

Web server\Overview of interfaces

Device	Interface	Enabled web server access
PLC_1	PROFINET-Schnittstelle_1	False

User interface languages	
Assign project language	**User interface languages**
English (United States)	German
English (United States)	English
English (United States)	French
English (United States)	Spanish
English (United States)	Italian
English (United States)	Chinese (simplified)

Time of day\Local time					
Time zone	(UTC +01:00) Berlin, Bern, Brussels, Rome, Stockholm, Vienna				
Time of day\Daylight saving time					
Activate daylight saving time	1	**Difference between standard and daylight saving time**	60min		
Time of day\Daylight saving time\Start of daylight saving time					
First week of the month:	Last		Sunday	**in**	March
at	1:00 a.m.				
Time of day\Daylight saving time\Start of standard time					
	Last		Sunday	**in**	October
at	2:00 a.m.				
Protection & Security					
Level of protection	No protection				
Protection & Security\Connection mechanisms					
Permit access with PUT/GET communication from remote partner	True				
Configuration control\Configuration control for central configuration					
Allow to reconfigure the device via the user program	0				

Connection resources

	Station resources - Reserved - Maximum	Station resources - Reserved - Configured	Station resources - Dynamic - Configured	Module resources - PLC_1 [CPU 1211C DC/DC/DC] - Configured
Maximum number of resources:		62	6	68
	Maximum	Configured	Configured	Configured
PG communication:	4	-	-	-
HMI communication:	12	0	0	0
S7 communication:	8	0	0	0
Open user communication:	8	0	0	0
Web communication:	30	-	-	-
Other communication:	-	-	0	0
Total resources used:		0	0	0
Available resources:		62	6	68

Overview of addresses\Overview of addresses\Overview of addresses					
Inputs	True	**Outputs**	True	**Address gaps**	False
Slot	True				

Type	Addr. from	Addr. to	Module	PIP	Device name	Device number	Size	Master / IO system	Rack	Slot
I	0	0	DI 6/DQ 4_1	None	PLC_1 [CPU 1211C DC/DC/DC]	-	1 Bytes	-	0	1 1
O	0	0	DI 6/DQ 4_1	Automatic update	PLC_1 [CPU 1211C DC/DC/DC]	-	1 Bytes	-	0	1 1
I	64	67	AI 2_1	None	PLC_1 [CPU 1211C DC/DC/DC]	-	4 Bytes	-	0	1 2
I	1000	1003	HSC_1	Automatic update	PLC_1 [CPU 1211C DC/DC/DC]	-	4 Bytes	-	0	1 16
I	1004	1007	HSC_2	Automatic update	PLC_1 [CPU 1211C DC/DC/DC]	-	4 Bytes	-	0	1 17
I	1008	1011	HSC_3	Automatic update	PLC_1 [CPU 1211C DC/DC/DC]	-	4 Bytes	-	0	1 18
I	1012	1015	HSC_4	Automatic update	PLC_1 [CPU 1211C DC/DC/DC]	-	4 Bytes	-	0	1 19
I	1016	1019	HSC_5	Automatic update	PLC_1 [CPU 1211C DC/DC/DC]	-	4 Bytes	-	0	1 20
I	1020	1023	HSC_6	Automatic update	PLC_1 [CPU 1211C DC/DC/DC]	-	4 Bytes	-	0	1 21
O	1000	1001	Pulse_1	Automatic update	PLC_1 [CPU 1211C DC/DC/DC]	-	2 Bytes	-	0	1 32
O	1002	1003	Pulse_2	Automatic update	PLC_1 [CPU 1211C DC/DC/DC]	-	2 Bytes	-	0	1 33
O	1004	1005	Pulse_3	Automatic update	PLC_1 [CPU 1211C DC/DC/DC]	-	2 Bytes	-	0	1 34
O	1006	1007	Pulse_4	Automatic update	PLC_1 [CPU 1211C DC/DC/DC]	-	2 Bytes	-	0	1 35

LIA_DISCRETE_DONE

Ungrouped devices

This folder is empty.

LIA_DISCRETE_DONE

Security settings

This folder is empty.

LIA_DISCRETE_DONE / Cross-device functions / Project traces

Measurements

This folder is empty.

LIA_DISCRETE_DONE / Cross-device functions / Long-term project traces

Measurements

This folder is empty.

LIA_DISCRETE_DONE / Common data / Alarm classes

Alarm classes

Alarm classes				
Name	**ID**	**Display name**	**Acknowledgment**	**Priority**
Acknowledgement	33	A	True	0
No Acknowledgement	34	NA	False	0

LIA_DISCRETE_DONE / Common data

Logs

This folder is empty.

LIA_DISCRETE_DONE / Languages & resources

Project languages

Languages
Reference language
English (United States)

Editing language
English (United States)

Other project languages
Empty

LIA_DISCRETE_DONE / Languages & resources / Project texts

Project texts

Project texts		
English (United States)	**Category**	**Reference**
	Block comment	LIA_DISCRETE_DONE\PLC_1 [CPU 1211C DC/DC/DC]\Program blocks\Turn [OB1]\Network 1\Comment
	Other text category	LIA_DISCRETE_DONE\Comment
	Block comment	LIA_DISCRETE_DONE\PLC_1 [CPU 1211C DC/DC/DC]\Program blocks\Turn [OB1]\Network 1\Title
"Main Program Sweep (Cycle)"	Block comment	LIA_DISCRETE_DONE\PLC_1 [CPU 1211C DC/DC/DC]\Program blocks\Turn [OB1]\Block title
"Main Program Sweep (Cycle)"	Block comment	LIA_DISCRETE_DONE\PLC_1 [CPU 1211C DC/DC/DC]\Program blocks\ROBOT ARM BLUE [OB123]\Block title
"Main Program Sweep (Cycle)"	Block comment	LIA_DISCRETE_DONE\PLC_1 [CPU 1211C DC/DC/DC]\Program blocks\CONTROL [OB124]\Block title
"Main Program Sweep (Cycle)"	Block comment	LIA_DISCRETE_DONE\PLC_1 [CPU 1211C DC/DC/DC]\Program blocks\ROBOT ARM METAL [OB126]\Block title
"Main Program Sweep (Cycle)"	Block comment	LIA_DISCRETE_DONE\PLC_1 [CPU 1211C DC/DC/DC]\Program blocks\ROBOT ARM GREEN [OB125]\Block title
=True, if remanent data are available	Block comment	LIA_DISCRETE_DONE\PLC_1 [CPU 1211C DC/DC/DC]\Program blocks\Turn [OB1]\Remanence
A	Alarm class text	LIA_DISCRETE_DONE\Acknowledgement\AlarmClassData_IDisplayNaming_DisplayName
A	Alarm class text	LIA_DISCRETE_DONE\Acknowledgement\ShortName
ADD LAST STEP!!!	Block comment	LIA_DISCRETE_DONE\PLC_1 [CPU 1211C DC/DC/DC]\Program blocks\CONTROL [OB124]\Network 1\Comment
BLUE DETECTION!!!	Block comment	LIA_DISCRETE_DONE\PLC_1 [CPU 1211C DC/DC/DC]\Program blocks\Turn [OB1]\Network 4\Comment
GREEN DETECTION	Block comment	LIA_DISCRETE_DONE\PLC_1 [CPU 1211C DC/DC/DC]\Program blocks\Turn [OB1]\Network 6\Comment
If a base is detected	Block comment	LIA_DISCRETE_DONE\PLC_1 [CPU 1211C DC/DC/DC]\Program blocks\ROBOT ARM BLUE [OB123]\Network 1\Comment
If a base is detected	Block comment	LIA_DISCRETE_DONE\PLC_1 [CPU 1211C DC/DC/DC]\Program blocks\ROBOT ARM METAL [OB126]\Network 1\Comment
If a base is detected	Block comment	LIA_DISCRETE_DONE\PLC_1 [CPU 1211C DC/DC/DC]\Program blocks\ROBOT ARM GREEN [OB125]\Network 1\Comment
Initial call of this OB	Block comment	LIA_DISCRETE_DONE\PLC_1 [CPU 1211C DC/DC/DC]\Program blocks\Turn [OB1]\Initial_Call
NA	Alarm class text	LIA_DISCRETE_DONE\No Acknowledgement\AlarmClassData_IDisplayNaming_DisplayName
NA	Alarm class text	LIA_DISCRETE_DONE\No Acknowledgement\ShortName