

A Portable Low-Cost Archaeological 3D Imaging and Cataloging System

Vaibhav Bajpai, Anuj Sehgal, and Daniel Cernea

Computer Science, Jacobs University Bremen
Campus Ring 1, 28759 Bremen, Germany
{v.bajpai, s.anuj, d.cernea}@jacobs-university.de

Abstract. This paper introduces a cross-platform low-cost system for 3D object reconstruction using a projection-based laser scanner. It uses contact-free measurement techniques for 3D object reconstruction and fast surface registration using Iterative Closest Point (ICP). The only hardware requirements are a simple commercial hand-held laser and a standard camera. The camera is initially calibrated using Zhang's camera calibration method so that its external and internal parameters are exactly known. The visible intersection with the background is used to find the exact 3D pose of the laser plane. This laser plane is used to triangulate new 3D point coordinates of the object's surface. The point clouds obtained are processed using 3D Toolkit (3DTK) which includes an automatic high-accurate registration process and a fast 3D viewer.

Keywords: Camera Calibration, Hough Transformation, 3D Reconstruction, Scan Registration, Hand-Held Laser, Image Filters, Color Models

1 Introduction

introduction

2 Related Work

related work

3 Approach

elevator pitch

3.1 Data Acquisition

We used a standard digital camera to capture multiple runs of a hand-held laser sweeping across the object as shown in figure 1. Since the videos were stored in raw format which cannot be directly processed by OpenCV [1], we used `mplayer` to extract individual frames at the rate of 5 frames per second.

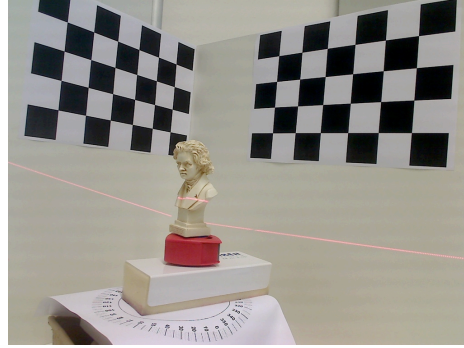


Fig. 1. Data Acquisition

```
$ mplayer -demuxer rawvideo \
    -rawvideo fps=5:w=1600:h=1200:yuy2 \
    -vo pnm:ppm $FILE
```

These frames were then later read into memory by calling the OpenCV routine `cvLoadImage()` with a `CV_LOAD_IMAGE_UNCHANGED` flag. The routine allocates an image data structure and returns a pointer to a struct of type `IplImage`

3.2 Camera Calibration

The first step in the process of reconstructing the 3D geometry of the object is to establish a mathematical relationship between the natural units of the camera with the physical units of the 3D world. We used camera calibration to learn the internal parameters of the camera and its distortion coefficients. The geometry is described in terms of camera's optical center and focal length.

We used OpenCV routines that are based on [2] [3] and used a planar chessboard pattern as our calibration object. We rotated and translated the pattern to provide multiple views to get the precise information about the intrinsic parameters of the camera as shown in figure 2. We used OpenCV routine `cvFindChessboardCorners()` to locate the corners and once we had enough corners from multiple view images, we used `cvCalibrateCamera2()` to get the intrinsic matrix A as shown in equation 1.

$$s \times \begin{bmatrix} u \\ v \\ 1 \end{bmatrix} = A \times [R \mid T] \times \begin{bmatrix} x_w \\ y_w \\ z_w \\ 1 \end{bmatrix} \quad (1)$$

where $A = \begin{bmatrix} f_x & 0 & c_x \\ 0 & f_y & c_y \\ 0 & 0 & 1 \end{bmatrix}$


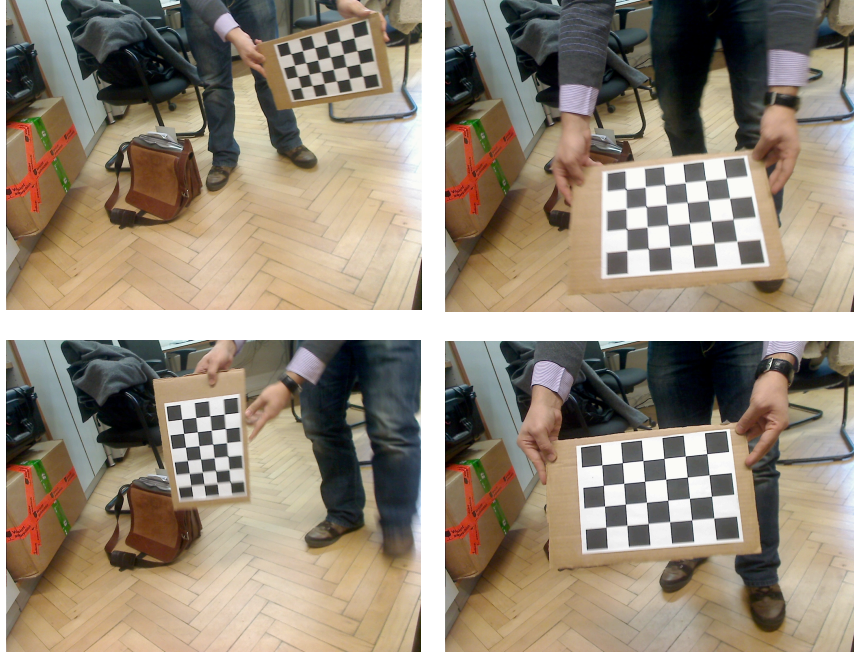


Fig. 2. Calculating the Camera's Intrinsic Parameters

The intrinsic matrix A was later used to describe the *pose* of the objects being scanned by the laser relative to the coordinate system of the camera. In order to determine this pose on both sides of the target object, the patterns were masked out to allow individual calculation as shown in figure 3. The parameters represented by $[R | T]$ could then be separately calculated for both the sides by calling the OpenCV routine `cvFindExtrinsicCameraParams2()`.

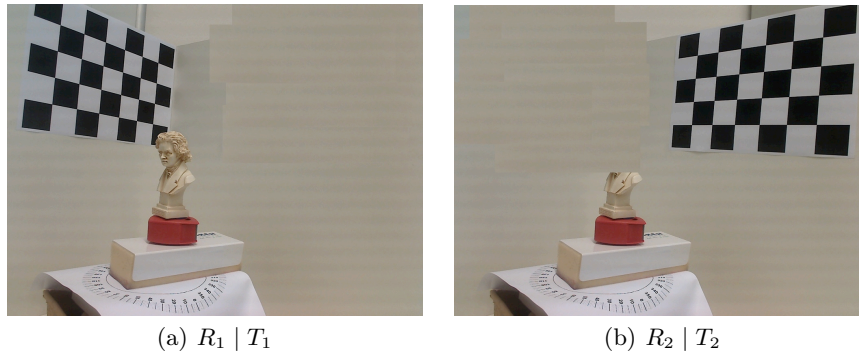

(a) $R_1 | T_1$

(b) $R_2 | T_2$

Fig. 3. Calculating the Camera's Extrinsic Parameters

3.3 Identification of 2D Laser Lines and Object Points

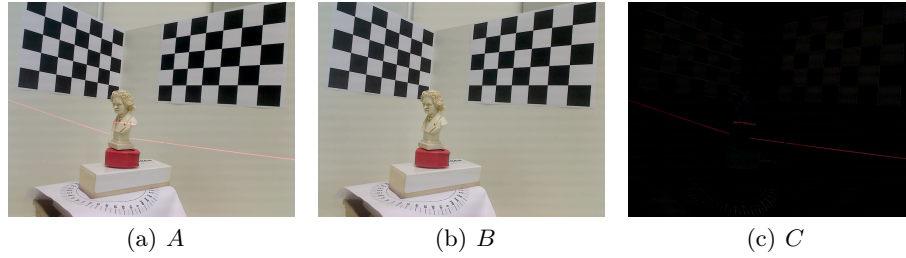


Fig. 4. Using Image Difference to Find the Laser

We used OpenCV routine `cvAbsDiff()` to calculate the image difference of the laser image from the reference image using equation 2. The resulted image difference is shown in figure 4

$$C = A - B \quad (2)$$

where A is the laser image in figure 4(a) and

B is the reference image in figure 4(b) and

C is the difference image in figure 4(c)

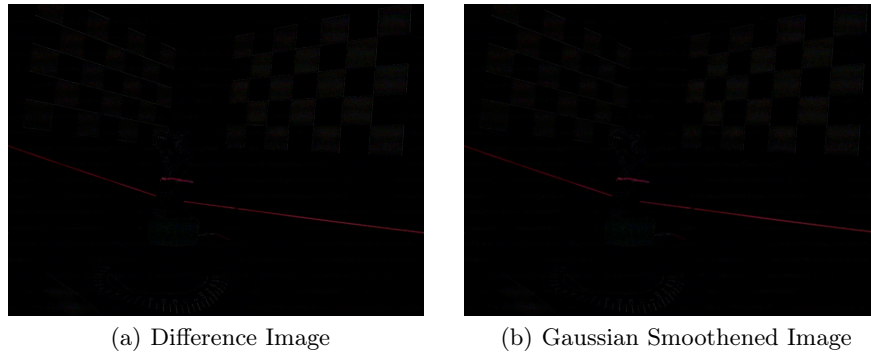


Fig. 5. Gaussian Smoothing the Difference Image

In order to reduce the noise in the difference image, we used the OpenCV routine `cvSmooth()` to convolve the image with a Gaussian kernel function as shown in figure 5. It not only helped us to remove the camera artifacts but also reduce the information content in the image.

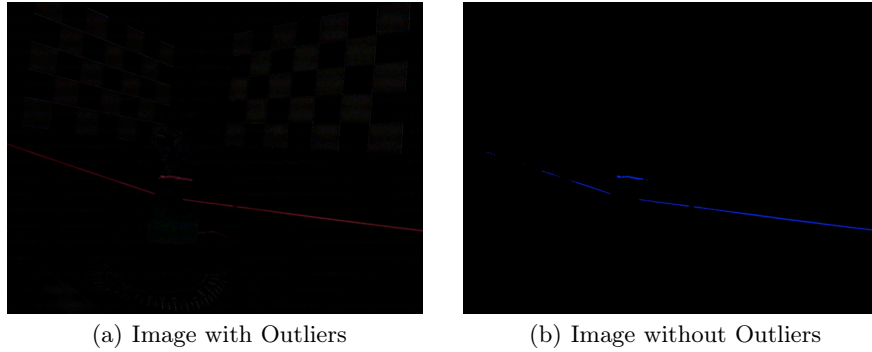


Fig. 6. Color Thresholding to Remove Outliers

In order to blacken out (remove) all outliers and keep just the pixels representing the red laser line as shown in figure 6, we used a pre-defined threshold value for the intensity of the red pixels. In order to restrict this thresholding only along the red channel, we used `cvSplit()` to split the three-channel (R,G,B) difference image into separate one-channel image planes. We used `cvGet2D()` and `cvSet2D()` to work on the scalar intensity values of the pixels.

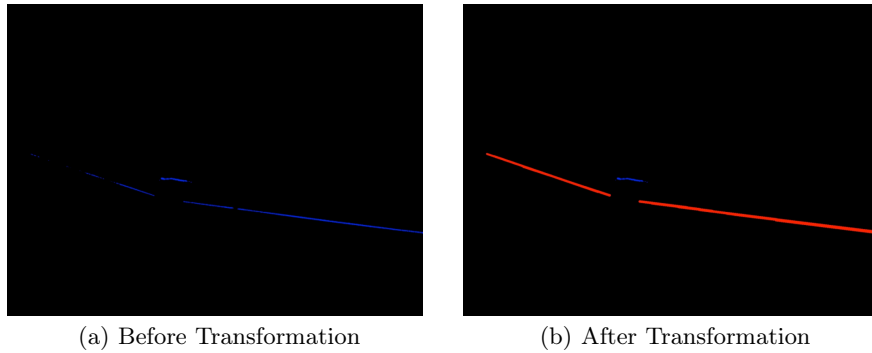


Fig. 7. Hough Transformation

We used Probabilistic Progressive Hough Transform (PPHT) [4], [5] using OpenCV routine `cvHoughLines2()` to detect the laser lines on both sides of the target object. The line end points of each line thus obtained were used to draw the line using `cvLine()` as shown in figure 7. The difference image was initially passed through an edge detection phase, since hough transform not only expects a gray-scale image as input but the input is also treated as binary information where the non-zero points are edge points of the image. Therefore, we used OpenCV routine `cvCvtColor` to convert the RGB difference image to gray scale

and `cvCanny()` to perform the Canny Edge Detection [6] before PPHT. The two hough line equations on either side of the object were used to learn the laser line points, while the points not identified as part of the hough line were taken as target object points.

3.4 Generation of Point Cloud

- Transform the Right Laser Points to Left Coordinate System
- Get the 3D Laser Points using Camera Extrinsics
- Get the Laser Plane Equation using 3 Laser Points
- Get the 3D Object Point by intersecting the Laser Plane with Light Ray
- Save the 3D Object Points with their color values using Reference Image

$$P_w = \underbrace{s \times R^{-1} \times A^{-1} \times \begin{pmatrix} u \\ v \\ 1 \end{pmatrix}}_{\vec{b}} - \underbrace{R^{-1} \times T}_{\vec{a}} \quad (3)$$

$$\text{where } \vec{a} = \begin{pmatrix} a_x \\ a_y \\ a_z \end{pmatrix}, \vec{b} = \begin{pmatrix} b_x \\ b_y \\ b_z \end{pmatrix} \text{ and } s = \frac{a_z}{b_z}$$

$$P_c = R_1^{-1} \times P_k - R_1^{-1} T_1 \quad (4)$$

$$\text{where } P_k = [R_2 \mid T_2] \times P_w$$

$$A_x + B_y + C_z + D = 0 \quad (5)$$

$$\text{where } \vec{N} = \begin{pmatrix} A \\ B \\ C \end{pmatrix}$$

$$P_w = s \times R^{-1} \times A^{-1} \times \begin{pmatrix} u \\ v \\ 1 \end{pmatrix} - R^{-1} \times T \quad (6)$$

$$\text{where } s = \frac{\vec{N} \times \vec{a} - D}{\vec{b} \times \vec{N}}$$

3.5 Point Cloud Processing and Registration

- 3DTK



Fig. 8. Results

4 Some Experimental Results

results

5 Evaluation and Comparison (maybe?)

evaluation-
comparison

6 Conclusion

conclusion

References

1. Bradski, G., Kaehler, A.: Learning OpenCV: Computer Vision with the OpenCV Library. Software that sees. O'Reilly (2008)

2. Zhang, Z.: A Flexible New Technique for Camera Calibration. Pattern Analysis and Machine Intelligence, IEEE Transactions on **22**(11) (nov 2000) 1330 – 1334
3. Brown, D.C.: Close-Range Camera Calibration. Photogrammetric Engineering **37**(8) (1971) 855–866
4. Kiryati, N., Eldar, Y., Bruckstein, A.M.: A probabilistic hough transform. Pattern Recogn. **24**(4) (February 1991) 303–316
5. Matas, J., Galambos, C., Kittler, J.: Robust detection of lines using the progressive probabilistic hough transform. Comput. Vis. Image Underst. **78**(1) (April 2000) 119–137
6. Canny, J.: A computational approach to edge detection. IEEE Trans. Pattern Anal. Mach. Intell. **8**(6) (June 1986) 679–698