



DC – AI – Routing – Switching – Security – Wireless – Automation

PTX10001-36MR FIB Install Rate

An HPE Juniper Networking Techpost

Suneesh Babu

2022-12-12

HPE



Contents

1	PTX10001-36MR FIB Install Rate	2
1.1	Introduction	2
1.2	Test Methodology	2
1.2.1	PTX10001-36MR Test Configurations for IPv4 Internet Profile	3
1.3	IPv4 + IPv6 Internet Dual Stack Profile	7
1.3.1	PTX10001-36MR Test Configurations for IPv4 and IPv6 Internet Profile	7
1.4	Conclusion	11
1.5	Glossary	11
1.6	Acknowledgement	11

1 PTX10001-36MR FIB Install Rate

Suneesh Babu - 12/12/2022

PTX10001-36MR installs the Internet routes at more than 27,000 routes per second, and we will show you how we are testing it.


1.1 Introduction

PTX10001-36MR supports an internet route install rate of 25,600 routes per second for IPv4 Internet profile and 27,230 routes per second for IPv4 +IPv6 stack with 22.2R2 Junos-EVO Image.

It's a test we regularly perform in our labs.


1.2 Test Methodology

The Topology consists of two routers connected back to back and each having a single traffic generator port. The traffic generator connected to DUT advertises a single route and the traffic generator connected to the helper DUT advertises the internet prefixes.

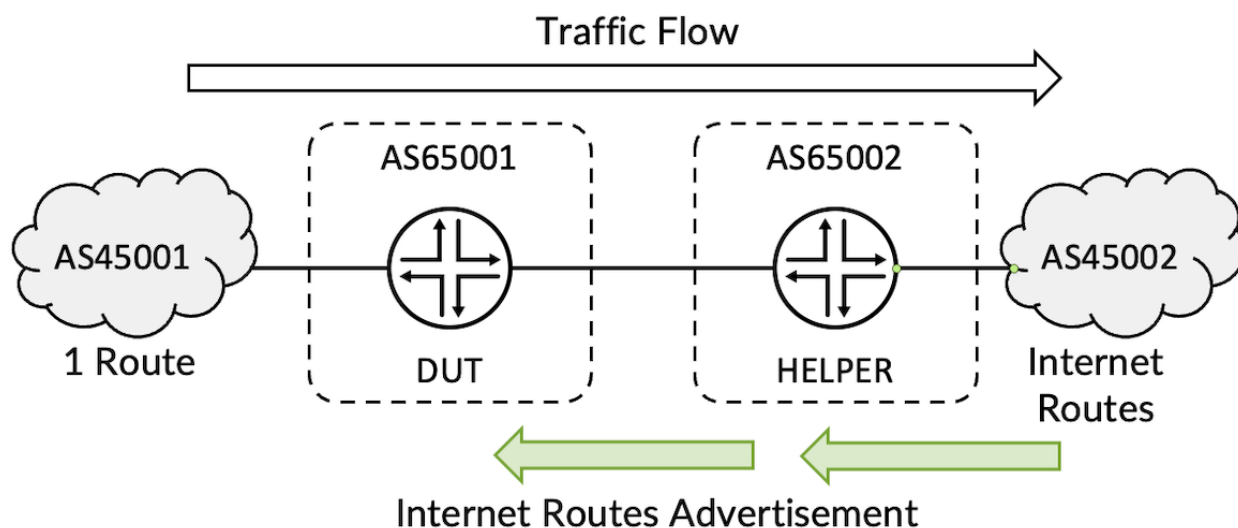


EBGP peering is enabled across the routers as well as across the router and traffic generator. The DUT learns a single route from the traffic generator and 930k IPv4 Internet prefixes from the helper DUT. Traffic is sent from the single route as the source and internet routes as the destination with 99.9% of offer load in iMIX mode.

The test starts with disabling the EBGP peering between the DUT and helper DUT, such that traffic drops and Tx is MAX rate and Rx is ZERO.

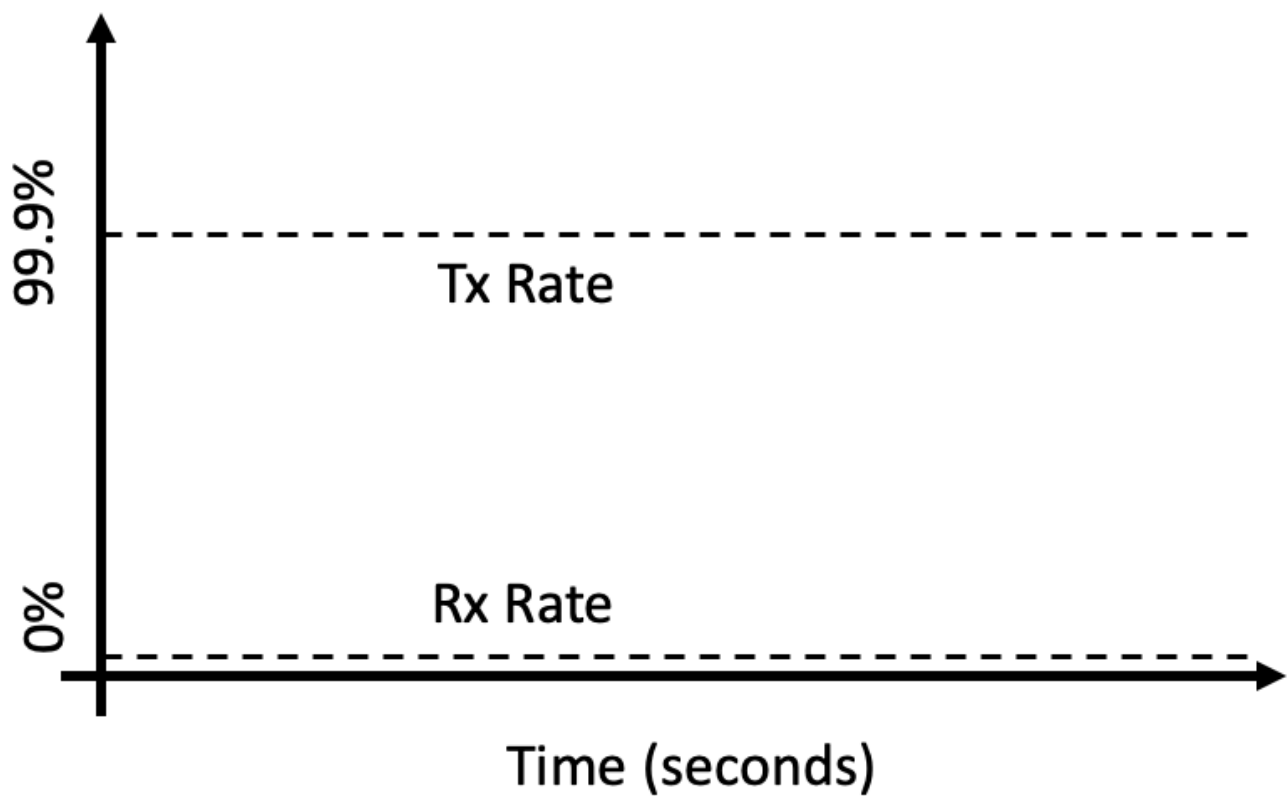

Once the interface between the routers is enabled, BGP peering will establish and Helper DUT advertise the internet prefixes to the DUT and Rx Rate increases as DUT installs the routes.

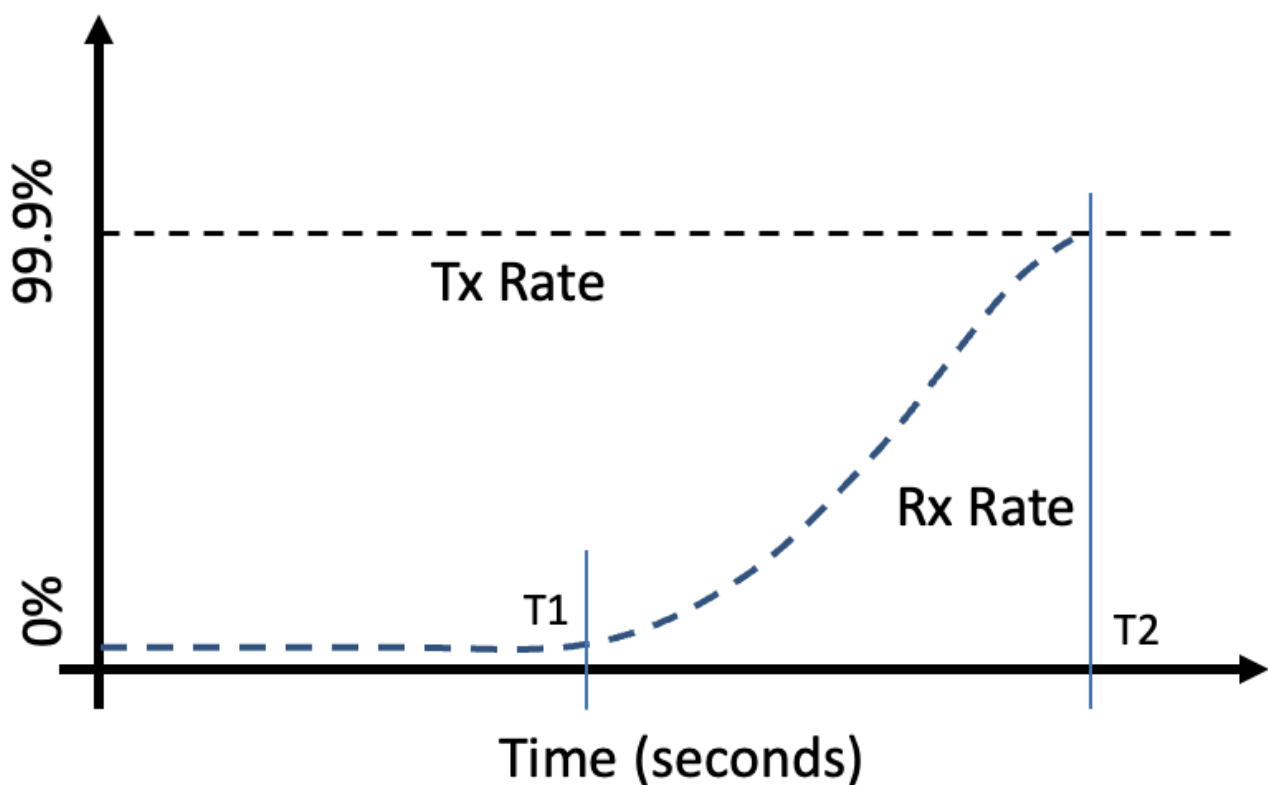

The total routes divided by $T2 - T1$ gives the number of routes installed per second.

1.2.1 PTX10001-36MR Test Configurations for IPv4 Internet Profile

```

1 regress@DUT> show configuration groups FIB_TEST
2 interfaces {
3     lo0 {
4         unit 0 {
5             family inet {
6                 address 12.1.1.1/32;
7             }
8         }
9     }
10    et-0/0/11 {
11        speed 100g;
12        mtu 9018;
13        unit 0 {
14            family inet {
15                address 15.1.1.1/24;
16            }
17        }
18    }
19    et-0/0/8 {
20        speed 100g;
21        mtu 9018;
22        unit 0 {
23            family inet {
24                address 15.2.1.1/24;
25            }
26        }
27    }
28 }
29 routing-options {
30     router-id 12.1.1.1;
31     autonomous-system 65001;
32 }
33 protocols {
34     bgp {
35         group FIB_Test {
36             type external;
37             family inet {
38                 unicast;
39             }
40             neighbor 15.1.1.2 {
41                 peer-as 45001;
42             }
43             neighbor 15.2.1.2 {
44                 peer-as 65002;
45             }
46         }
47     }
48     lldp {
49         interface et-0/0/8;
50     }
51 }
52
53
54 regress@DUT>

```

and Helper:

```

1 regress@Helper-DUT> show configuration groups FIB_TEST
2 interfaces {
3     lo0 {
4         unit 0 {
5             family inet {
6                 address 12.1.1.2/32;
7             }
8         }
9     }
10    et-0/0/8 {
11        speed 100g;
12        mtu 9018;
13        unit 0 {
14            family inet {
15                address 15.2.1.2/24;
16            }
17        }
18    }
19    et-0/0/9 {
20        speed 100g;
21        mtu 9018;
22        unit 0 {

```

```

23     family inet {
24         address 15.3.1.1/24;
25     }
26 }
27 }
28 }
29 routing-options {
30     router-id 12.1.1.2;
31     autonomous-system 65002;
32 }
33 protocols {
34     bgp {
35         group FIB_Test {
36             type external;
37             family inet {
38                 unicast;
39             }
40             neighbor 15.2.1.1 {
41                 peer-as 65001;
42             }
43             neighbor 15.3.1.2 {
44                 peer-as 45002;
45             }
46         }
47     }
48     lldp {
49         interface et-0/0/8;
50     }
51 }
52
53 regress@Helper-DUT>

```

The BGP Peering is in IDLE State after disabling the interface

```

1 regress@DUT> configure
2 Entering configuration mode
3
4 [edit]
5 regress@DUT# set interfaces et-0/0/8 disable
6
7 [edit]
8 regress@DUT# commit and-quit
9 commit complete
10 Exiting configuration mode
11
12 regress@DUT> show bgp summary
13 Threading mode: BGP I/O
14 Default eBGP mode: advertise - accept, receive - accept
15 Groups: 1 Peers: 2 Down peers: 1
16 Table Tot Paths Act Paths Suppressed History Damp State Pending
17 inet.0
18           1 1 0 0 0 0
19 Peer AS InPkt OutPkt OutQ Flaps Last Up/Dwn State|#Active/Received/Accepted/Damped...
20 15.1.1.2 45001 328 446567 355972 1 2:42:09 Establ
21   inet.0: 1/1/1/0
22 15.2.1.2 65002 130896 42 0 2 18 Idle
23
24 regress@DUT>

```

Once the interface is enabled, the BGP peering comes up and DUT starts learning the routes

```

1 [edit]
2 regress@DUT# delete interfaces et-0/0/8 disable
3
4 [edit]
5 regress@DUT# commit and-quit
6 commit complete
7 Exiting configuration mode
8
9 regress@DUT> show lldp neighbors
10 Local Interface Parent Interface Chassis Id Port info System Name
11 et-0/0/8 - 68:22:8e:24:e4:a6 et-0/0/8 Helper-DUT.englab.juniper.net
12
13 regress@DUT> show bgp summary
14 Threading mode: BGP I/O
15 Default eBGP mode: advertise - accept, receive - accept
16 Groups: 1 Peers: 2 Down peers: 0
17 Table Tot Paths Act Paths Suppressed History Damp State Pending
18 inet.0

```

```


19          930282 930282 0 0 0 0
20 Peer AS InPkt OutPkt OutQ Flaps Last Up/Dwn State|#Active/Received/Accepted/Damped...
21 15.1.1.2 45001 320 445989 0 1 2:38:17 Establ
22   inet.0: 1/1/1/0
23 15.2.1.2 65002 130888 34 0 1 14:36 Establ
24   inet.0: 930281/930281/930281/0
25
26 regress@DUT>

```


The 24 Core CPU of PTX10001-36MR during IPv4 Internet Route learning is as follows:



As the routes started learnt in the DUT, traffic starts flowing and once entire routes are installed Rx and Tx Rate matches as follows:

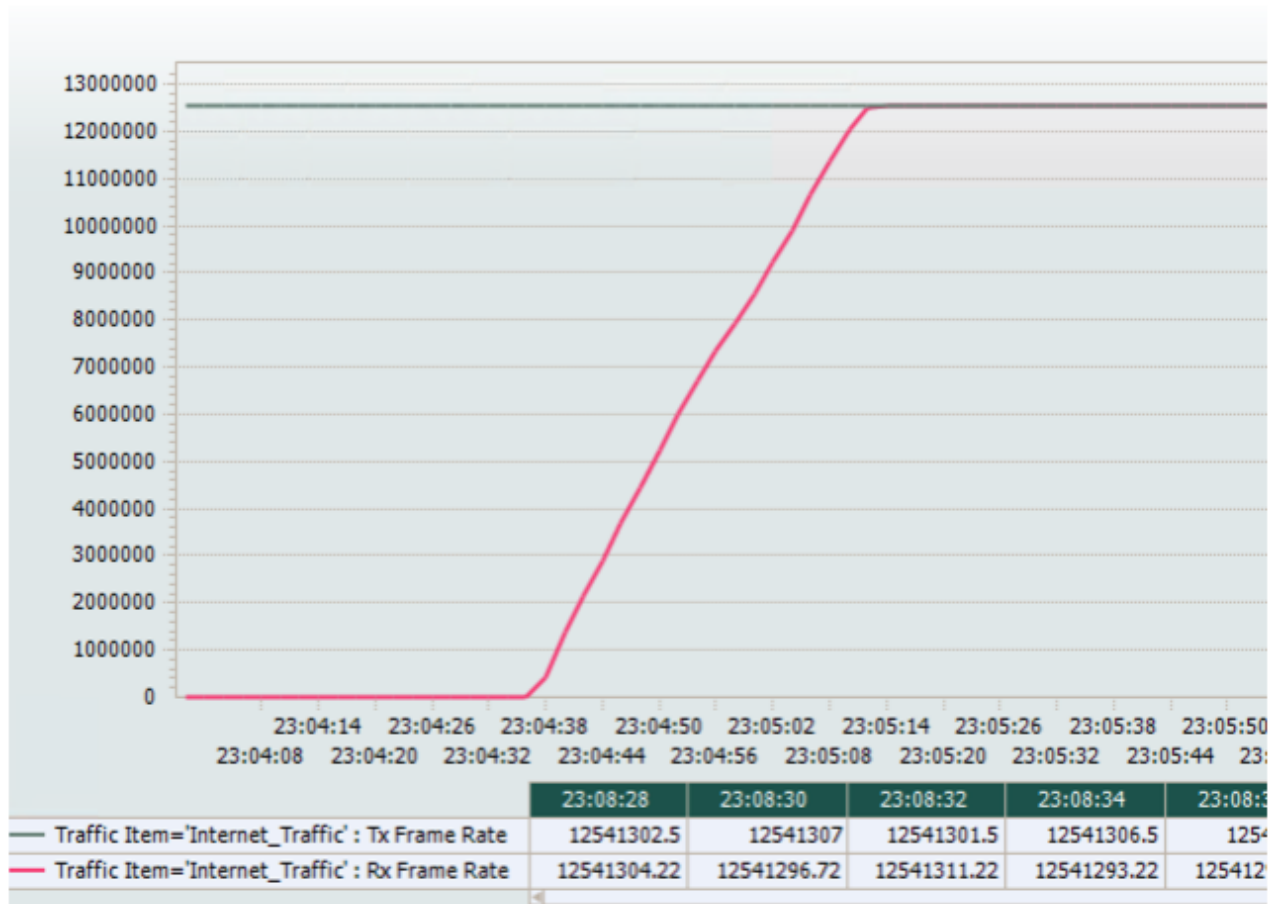

The T1 and T2 time are measured as follows:

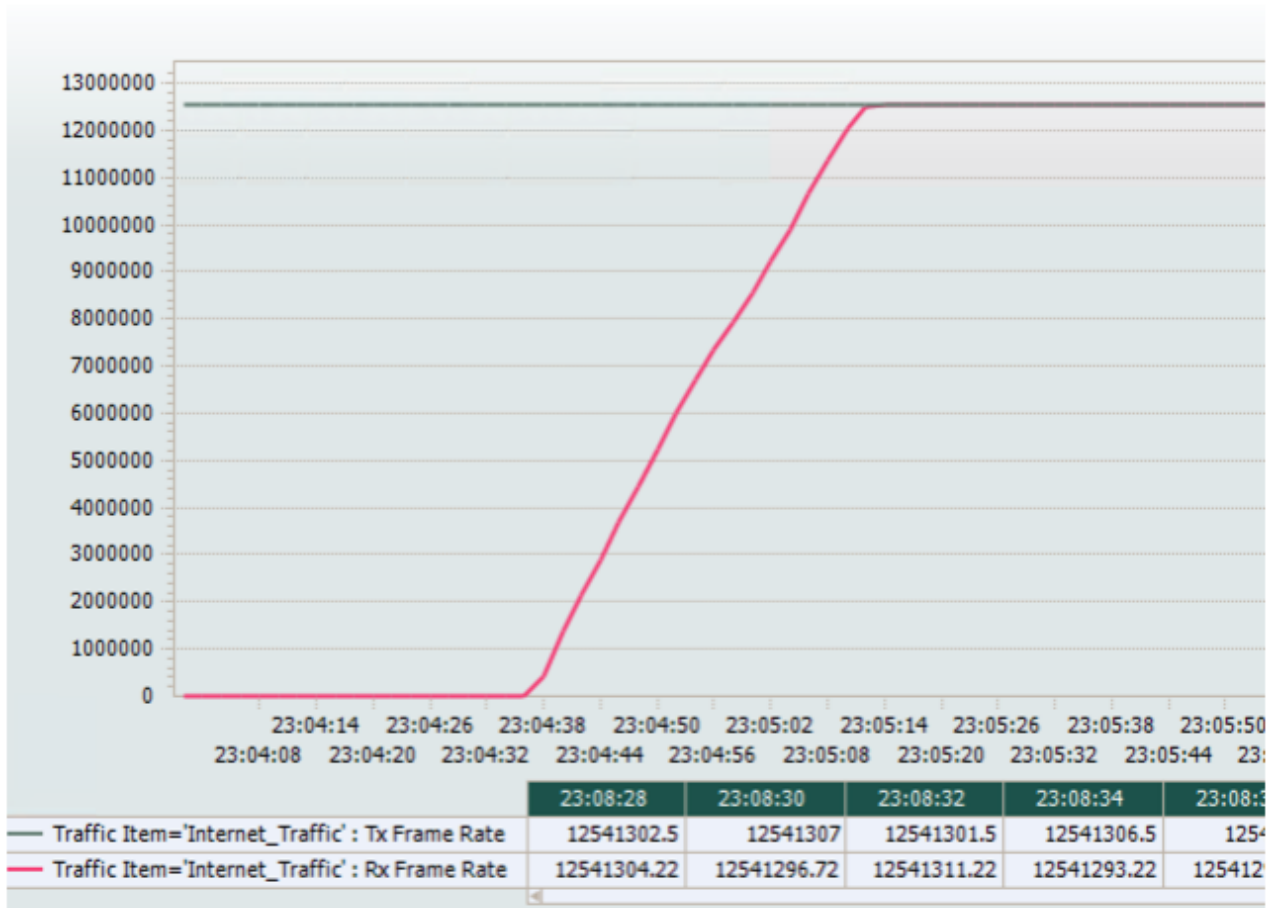

The test is repeated for three iterations and the measurements are as follows:

Number of IPv4 Routes: 930,281

Iteration	T1	T2	T2-T1 (sec)	Nb of routes / (T2-T1) in RPS
1	23:04:36	23:05:13	37	25,142
2	23:45:10	23:45:46	36	25,841
3	23:57:48	23:58:24	36	25,841
Average				25,608

1.3 IPv4 + IPv6 Internet Dual Stack Profile

1.3.1 PTX10001-36MR Test Configurations for IPv4 and IPv6 Internet Profile

```

1 regress@DUT> show configuration groups FIB_TEST
2 interfaces {
3   lo0 {
4     unit 0 {
5       family inet {
6         address 12.1.1.1/32;
7       }
8     }
9   }
10  et-0/0/11 {

```

```

11     speed 100g;
12     mtu 9018;
13     unit 0 {
14         family inet {
15             address 15.1.1.1/24;
16         }
17         family inet6 {
18             address 2002:15:1:1::1/64;
19         }
20     }
21 }
22 et-0/0/8 {
23     speed 100g;
24     mtu 9018;
25     unit 0 {
26         family inet {
27             address 15.2.1.1/24;
28         }
29         family inet6 {
30             address 2002:15:2:1::1/64;
31         }
32     }
33 }
34 }
35 routing-options {
36     router-id 12.1.1.1;
37     autonomous-system 65001;
38 }
39 protocols {
40     bgp {
41         group FIB_Test {
42             type external;
43             family inet {
44                 unicast;
45             }
46             neighbor 15.1.1.2 {
47                 peer-as 45001;
48             }
49             neighbor 15.2.1.2 {
50                 peer-as 65002;
51             }
52         }
53         group FIBv6_Test {
54             type external;
55             family inet6 {
56                 unicast;
57             }
58             neighbor 2002:15:1:1::2 {
59                 peer-as 45001;
60             }
61             neighbor 2002:15:2:1::2 {
62                 peer-as 65002;
63             }
64         }
65     }
66     lldp {
67         interface et-0/0/8;
68     }
69 }
70
71 regress@DUT>

```

And the Helper router:

```

1 regress@Helper-DUT> show configuration groups FIB_TEST
2 interfaces {
3     lo0 {
4         unit 0 {
5             family inet {
6                 address 12.1.1.2/32;
7             }
8         }
9     }
10    et-0/0/8 {
11        speed 100g;
12        mtu 9018;
13        unit 0 {
14            family inet {
15                address 15.2.1.2/24;
16            }

```

```

17     family inet6 {
18         address 2002:15:2:1::2/64;
19     }
20 }
21 }
22 et-0/0/9 {
23     speed 100g;
24     mtu 9018;
25     unit 0 {
26         family inet {
27             address 15.3.1.1/24;
28         }
29         family inet6 {
30             address 2002:15:3:1::1/64;
31         }
32     }
33 }
34 }
35 routing-options {
36     router-id 12.1.1.2;
37     autonomous-system 65002;
38 }
39 protocols {
40     bgp {
41         group FIB_Test {
42             type external;
43             family inet {
44                 unicast;
45             }
46             neighbor 15.2.1.1 {
47                 peer-as 65001;
48             }
49             neighbor 15.3.1.2 {
50                 peer-as 45002;
51             }
52         }
53         group FIBv6_Test {
54             type external;
55             family inet6 {
56                 unicast;
57             }
58             neighbor 2002:15:2:1::1 {
59                 peer-as 65001;
60             }
61             neighbor 2002:15:3:1::2 {
62                 peer-as 45002;
63             }
64         }
65     }
66     lldp {
67         interface et-0/0/8;
68     }
69 }
70
71 regress@Helper-DUT>

```

The BGP summary info with both IPv4 and IPv6 families are as follows:

```


1 regress@DUT> show bgp summary
2 Threading mode: BGP I/O
3 Default eBGP mode: advertise - accept, receive - accept
4 Groups: 2 Peers: 4 Down peers: 0
5 Table Tot Paths Act Paths Suppressed History Damp State Pending
6 inet.0
7     930282 930282 0 0 0 0
8 inet6.0
9     147942 147942 0 0 0 0
10 Peer AS InPkt OutPkt OutQ Flaps Last Up/Dwn State|#Active/Received/Accepted/Damped...
11 15.1.1.2 45001 52 446040 0 3 24:16 Establ
12     inet.0: 1/1/1/0
13 15.2.1.2 65002 130870 17 0 4 6:29 Establ
14     inet.0: 930281/930281/930281/0
15 2002:15:1:1::2 45001 52 83724 0 1 24:12 Establ
16     inet6.0: 1/1/1/0
17 2002:15:2:1::2 65002 35888 15 0 1 6:18 Establ
18     inet6.0: 147941/147941/147941/0
19
20 regress@DUT>

```

The 24 Core CPU of PTX10001-36MR during route-learning is as follows:



The FIB Install Rate with traffic flow is measured as follows:

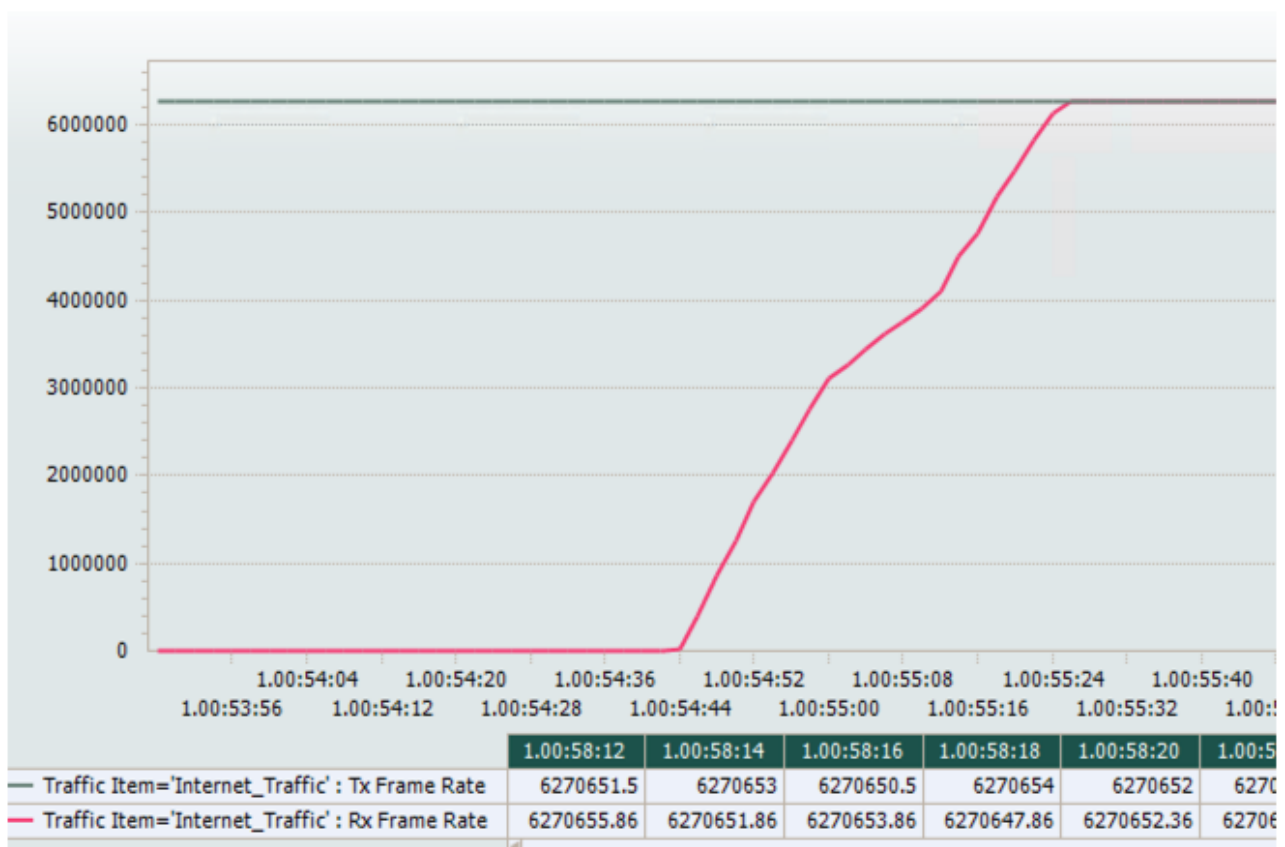

Total Number of Routes: 930,281 (IPv4) + 147,941 (IPv6) = 1,078,222

Iteration	T1	T2	T2-T1 (sec)	Nb of routes / (T2-T1) in RPS
1	1:54:44	1:55:26	42	25,671
2	1:10:38	1:11:16	38	28,374
3	1:22:58	1:23:37	39	27,646

Iteration	T1	T2	T2-T1 (sec)	Nb of routes / (T2-T1) in RPS
Average				27,230

1.4 Conclusion

PTX10001-36MR running on 22.2R2 JUNOS-EVO image supports a route-learning rate of ~25,600 routes per second for IPv4 Internet profile and 27,230 routes per second for dual-stack. We run this test for each release to guarantee performance consistency.

1.5 Glossary

- BGP – Border Gateway Protocol
- DUT – Device Under Test
- IPv4 – Internet Protocol Version 4
- IPv6 – Internet Protocol Version 6

1.6 Acknowledgement

Many thanks to Ramdas Machat and Nicolas Fevrier for reviewing the article and providing the feedback



DC – AI – Routing – Switching – Security – Wireless – Automation

© Copyright 2026 Hewlett Packard Enterprise Development LP. The information contained herein is subject to change without notice. The only warranties for Hewlett Packard Enterprise products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty.

Hewlett Packard Enterprise shall not be liable for technical or editorial errors or omissions contained herein.

Trademark acknowledgments, if needed. All third-party marks are the property of their respective owners.

HEWLETT PACKARD ENTERPRISE

HPE.com

