

# TrustFLEX Step by Step Guide Secure Public key Rotation

## **Table of Contents**

1 Introduction	
1.1 Getting started with Jupyter Notebook Tutorials	
1.1.1 Starting Jupyter Notebook	3
1.2 Jupyter Notebook Basics	4
1.2.1 The Notebook dashboard	4
1.3 Introduction to Jupyter Notebook GUI	4
2 Jupyter Notebook Tutorials	6
3 Resource Generation Notebook	7
4 Use Case Prototyping	16
4.1 Running Public Key Rotation example on Jupyter Notebook:	16
4.2 Running Public Key Rotation on Embedded platform	22
4.2.1 MPLAB:	22
4.2.2 Atmel Studio (Deprecated)	25
4.3 Crypto Auth Trust Platform Factory reset	29
5 FAQ	30

## 1 Introduction

This document helps in running Secure Public Key rotation use case example provided in TrustFLEX package. If familiar with Jupyter Notebook, can skip this section and move to Section 2.

## 1.1 Getting started with Jupyter Notebook Tutorials

Jupyter Notebook is open source web application which allows you to create documents that contain code that you can execute in place as well as narrative text. It provides GUI elements, ability to execute code in place, ability to add images and gives it the look and feel that normal code files lack.


Jupyter notebooks are mainly used to explain/evaluate code in an interactive way.

## 1.1.1 Starting Jupyter Notebook

Jupyter notebook can be launched from Trust Platform GUI Main window. Run START -> Trust Platform x.x.x icon. Click on 'Start Jupyter' button to launch Jupyter local server.



Clicking on Start Jupyter should be web browser tab like below,

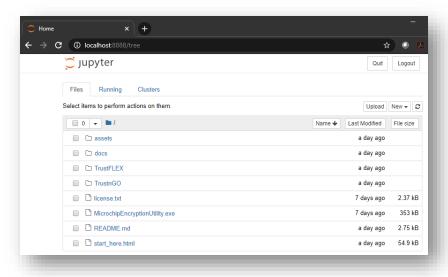

## 1.2 Jupyter Notebook Basics

It is recommended to become familiar with Jupyter basic concepts with the online documentation, <a href="https://jupyter-">https://jupyter-</a>


notebook.readthedocs.io/en/stable/examples/Notebook/Notebook%20Basics.html

Some of the content is duplicated here for convenience. The online documentation should always be used as a reference.

### 1.2.1 The Notebook dashboard

When you first start the notebook server, your browser will open to the notebook dashboard. The dashboard serves as a home page for the notebook. Its main purpose is to display the notebooks and files in the current directory.

For example, here is a screenshot of the Jupyter dashboard. The top of the notebook list displays clickable breadcrumbs of the current directory. By clicking on these breadcrumbs or on sub-directories in the notebook list, you can navigate your file system.

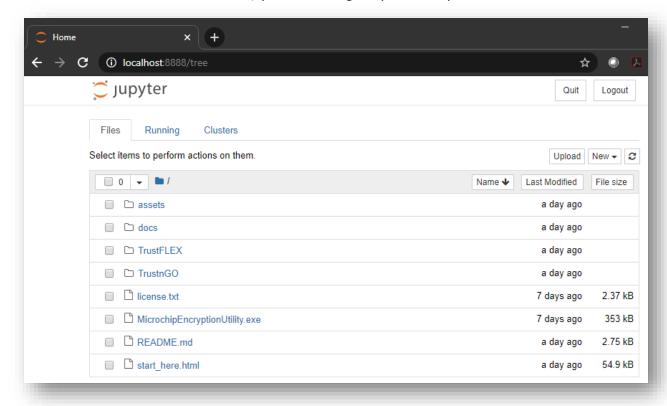

## 1.3 Introduction to Jupyter Notebook GUI.

Jupyter Notebooks contain cells where you can either write code or markdown text. Notebooks contain multiple cells, some set as code and others markdown. Code cells contain code that can be executed live, and markdown contains text and images to explain the code.

Below image shows some options in a typical Jupyter Notebook. Individual cells can be executed by pressing on the RUN button as shown in the below image.

All cells in the Notebook can be executed in order by Kernel->Restart & Run All.



To run all cells in sequence.



2 Jupyter Notebook Tutorials
The Trust Platform Design Suite comes with a Notebook Tutorials to easily prototype popular use cases for TrustFLEX devices. Here is the Jupyter Notebook Tutorials.

Jupyter Notebook Tutorials	Relative Path				
Manifest Generation	TrustnGO\00_resource_generation\TNGTLS_manifest_file_generation.ipynb				
GCP Connect	TrustnGO\05_cloud_connect\notebook\gcp\TNGTLS_GCP_connect.ipynb				
AWS Connect	TrustnGO\05_cloud_connect\notebook\aws\TNGTLS_aws_connect.ipynb				
Azure Connect	TrustnGO\05_cloud_connect\notebook\azure\ TNGTLS_azure_connect.ipynb				
Resource Generation	TrustFLEX\00_resource_generation\TFLXTLS_resource_generator.ipynb	TrustFLEX			
Accessory Authentication	TrustFLEX\01_accessory_authentication\notebook\ TFLXTLS_accessory_authentication.ipynb	TrustFLEX			
Firmware Validation	TrustFLEX\02_firmware_validation\notebook\ TFLXTLS_firmware_validation.ipynb	TrustFLEX			
IP Protection	TrustFLEX\04_ip_protection\notebook\ TFLXTLS_IP_protection.ipynb	TrustFLEX			
Secure Public Key Rotation	TrustFLEX\05_public_key_rotation\notebook\ TFLXTLS_public_key_rotation.ipynb	TrustFLEX			
Asymmetric authentication	08_asymmetric_authentication\notebook\ TFLXTLS_asymmetric_authentication.ipynb	TrustFLEX			
GCP Connect	TrustFLEX\10_cloud_connect\notebook\gcp\TFLXTLS_GCP_connect.ipynb	TrustFLEX			
AWS Custom PKI	TrustFLEX\10_cloud_connect\notebook\aws\ TFLXTLS_aws_connect.ipynb	TrustFLEX			
Azure Connect	TrustFLEX\10_cloud_connect\notebook\azure\ TLFXTLS_azure_connect.ipynb	TrustFLEX			


## 3 Resource Generation Notebook

TFLXTLS device is one of the three devices available on the Crypto Auth Trust Platform Board.

TrustFLEX devices come with pre-programmed certificates in slots 10, 11 and 12, also slots 0-4 have pre-generated private keys, other than the mentioned slots all the other slots have no data in them.


The Resource Generator Notebook will create development keys and certificates for all slots that can be further customized. Keys and Certificate chains are stored in the PC filesystem. These keys should never be used for production purposes as their generation is not handled in a secure environment. These development keys will be later used by the other notebooks to implement the various pre-defined use cases.

Within the Jupyter Dashboard, navigate **TrustFLEX\00\_resource\_generation** folder to open **TFLXTLS\_resource\_generator.ipynb** notebook

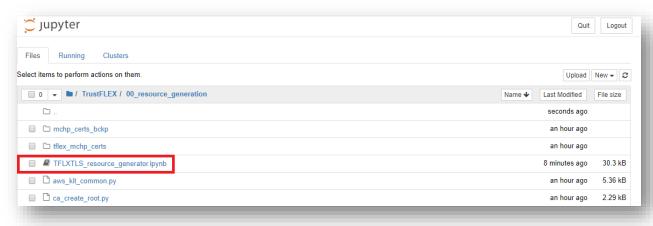

Run all cells of the Crypto Resource Generator Notebook: Kernel->Restart & Run All

**Note:** Before executing the cells on Crypto Trust Platform, its required to have factory default program running on SAMD21 of Trust Platform. Refer to <u>Crypto Auth Trust Platform Factory reset</u> section for reloading default program.

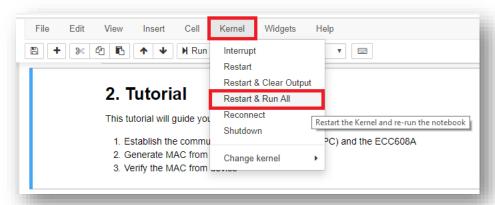

Crypto Resource Generator notebook is common for all the use case which comes with option to load the signer certificate and device certificate. The Notebook will generate several keys and certificates. Make sure you have an error free output before continuing to the next steps of the training. Following are 3 different things can be performed,

## 1. Generating resources to general key slots



## The output log should resemble this:

-----

Slot 0 is a private key slot, no action required

Slot 1 is a private key slot, no action required

Slot 2 is a private key slot, no action required

Slot 3 is a private key slot, no action required

Slot 4 is a private key slot, no action required

Slot 6 is a secret key, created slot\_6\_secret\_key.pem and programmed

NOTE: While writing symmetric key into secure element it has to be encrypted with IO prote ction key. So here, Slot 6 (IO protection key) is written before slot 5 (Symmetric key)

Slot 5 is a secret key, created slot\_5\_secret\_key.pem and programmed

Slot 7 is a secureboot digest slot, slot can only be written through secureboot command

Slot 8 is a general purpose slot of size 416 bytes, no action required

Slot 9 is a secret key, created slot\_9\_secret\_key.pem and programmed

Slot 10 is a certificate slot, no action required now, will be updated as part of Generate Certificates

Slot 11 is a certificate slot, no action required now, will be updated as part of Generate Certificates

Slot 12 is a certificate slot, no action required now, will be updated as part of Generate Certificates

Slot 13 is a public key slot, created slot\_13\_ecc\_key\_pair.pem and programmed

Slot 14 is a public key slot, created slot\_14\_ecc\_key\_pair.pem and programmed

Slot 15 is a public key slot, created slot\_15\_ecc\_key\_pair.pem and programmed

Key	gen	era	tion	- S	ucc	ess		

## 2. Generating MCHP or Custom Certificates

On selecting Custom certificates, it prompts to enter the organization name, enter the name that will be used as an Organization Name in the certificate template. The name length is limited to 24 characters.

2. Select the Certific		sion to device ement object and store it in manifest file
Generate_Resources N	MCHP Cert Generate_Manifes	t
0	ustom Cert	
Slot 1 is a private ke Slot 2 is a private ke Slot 3 is a private ke Slot 4 is a private ke	ey slot, no action require ey slot, no action require ey slot, no action require ey slot, no action require ey slot, no action require y, created slot_6_secret_k	ed ed ed
	ymmetric key into secure e before slot 5 (Symmetric k	element it has to be encrypted with IO prot (ey)
Slot 7 is a securebood Slot 8 is a general pur Slot 9 is a secret key Slot 10 is a certification of the Slot 11 is a certification of the Slot 12 is a certification of the Slot 13 is a public key Slot 14 is a public key	urpose slot of size 416 by y, created slot_9_secret_k ate slot, no action requir ate slot, no action requir ate slot, no action requir ey slot, created slot_13_e ey slot, created slot_14_e	nly be written through secureboot command rtes, no action required
Key generation - Succe	ess	
Org Name:		Org Name and Press Enter to nue Custom Certs processing

## The output log should resemble this:

-----

Custom Certs processing...

Device contains custom device and signer certificates

Building new root certificate

Building new signer csr certificate

Building new signer certificate

Read device serial number...OK (SN: 01233E8A1491F2A601)

Read device public key from slot 0...OK (Public Key: CF1988BC3A6C252026FE70FB34397AD 85A39AE811C722BFA6E5EC1E9CDA9133B3F0E91FD3877F25B8C893B311BAF0203CB5100C 4CDABEBAFDAF3EBD550B00125)

Generating device certificate...OK (saved to device\_01233E8A1491F2A601.crt) Saving signer certificate to device...OK Saving device certificate to device...OK Thing ID eabc56113c70227a18c0a62f7c285fc68d75f9cd

-----

Custom certificate generation and provisioning - SUCCESS

-----

Validate root certificate...OK -----BEGIN CERTIFICATE-----

MIIByjCCAW+gAwIBAgIQeoueybRh8XWwzOkoixtW1jAKBggqhkjOPQQDAjA7MQ0w CwYDVQQKDAR0ZXN0MSowKAYDVQQDDCFDcnlwdG8gQXV0aGVudGljYXRpb24gUm9v dCBDQSAwMDIwIBcNMjAwNzAxMDgwNTE5WhgPMjA2MDA2MjEwODA1MTlaMDsxDTAL BgNVBAoMBHRlc3QxKjAoBgNVBAMMIUNyeXB0byBBdXRoZW50aWNhdGlvbiBSb290 IENBIDAwMjBZMBMGByqGSM49AgEGCCqGSM49AwEHA0IABFf6qcSyPv8iY0uccoTX SlSstaz0ECCUxXUoqky8Xo40vsOCbPPt5QtlvNHnyy8tAbwza6DsAiz2sGLzDI5h QhqjUzBRMB0GA1UdDgQWBBRHVPQoljiq65JOG4vu5l32JzmkSTAfBgNVHSMEGDAW gBRHVPQoljiq65JOG4vu5l32JzmkSTAPBgNVHRMBAf8EBTADAQH/MAoGCCqGSM49 BAMCA0kAMEYCIQCB7FKx5K33xK9E0PsWGKZRaaQxxSRypC66y4hVqWVmMAIhAMIG 22zNUKPHccHQxfQssYH5LfR5SVE+WC3Hyxem/EVj

----END CERTIFICATE----

### Certificate:

Data:

Version: 3 (0x2) Serial Number:

7a:8b:9e:c9:b4:61:f1:75:b0:cc:e9:28:8b:1b:56:d6

Signature Algorithm: ecdsa-with-SHA256

Issuer: O=test, CN=Crypto Authentication Root CA 002

Validity

Not Before: Jul 1 08:05:19 2020 GMT Not After: Jun 21 08:05:19 2060 GMT

Subject: O=test, CN=Crypto Authentication Root CA 002

Subject Public Key Info:

Public Key Algorithm: id-ecPublicKey

Public-Key: (256 bit)

pub:

04:57:fa:a9:c4:b2:3e:ff:22:63:4b:9c:72:84:d7: 4a:54:ac:b5:ac:f4:10:20:94:c5:75:28:aa:4c:bc: 5e:8e:34:be:c3:82:6c:f3:ed:e5:0b:65:bc:d1:e7: cb:2f:2d:01:bc:33:6b:a0:ec:02:2c:f6:b0:62:f3:

Oc:8e:61:42:1a ASN1 OID: prime256v1 NIST CURVE: P-256

X509v3 extensions:

X509v3 Subject Key Identifier:

47:54:F4:28:96:38:AA:EB:92:4E:1B:8B:EE:E6:5D:F6:27:39:A4:49

X509v3 Authority Key Identifier:

keyid:47:54:F4:28:96:38:AA:EB:92:4E:1B:8B:EE:E6:5D:F6:27:39:A4:49

X509v3 Basic Constraints: critical

CA:TRUE

Signature Algorithm: ecdsa-with-SHA256

30:46:02:21:00:81:ec:52:b1:e4:ad:f7:c4:af:44:d0:fb:16: 18:a6:51:69:a4:31:c5:24:72:a4:2e:ba:cb:88:55:a9:65:66: 30:02:21:00:c9:46:db:6c:cd:50:a3:c7:71:c1:d0:c5:f4:2c: b1:81:f9:2d:f4:79:49:51:3e:58:2d:c7:cb:17:a6:fc:45:63

Validate signer certificate...OK -----BEGIN CERTIFICATE-----

MIIB3TCCAYKgAwIBAgIQV/RpeXxWfquIIYFCFTDc/TAKBggqhkjOPQQDAjA7MQ0w CwYDVQQKDAR0ZXN0MSowKAYDVQQDDCFDcnlwdG8gQXV0aGVudGljYXRpb24gUm9v dCBDQSAwMDIwIBcNMjAwNzAxMDgwMDAwWhgPMjA0MDA3MDEwODAwMDBaMDsxDTAL BgNVBAoMBHRlc3QxKjAoBgNVBAMMIUNyeXB0byBBdXRoZW50aWNhdGlvbiBTaWdu ZXIgRkZGRjBZMBMGByqGSM49AgEGCCqGSM49AwEHA0IABCEubbOfXDakettxvfKu kfG5UhQNDHrPrZiURytSZmQ8p38VacZ682akSAC6XQYDzhiy5/504eAHBCuN5rOt vnOjZjBkMA4GA1UdDwEB/wQEAwIBhjASBgNVHRMBAf8ECDAGAQH/AgEAMB0GA1Ud DgQWBBRycA/sc+NWXwp0wLudepyPtQtzFzAfBgNVHSMEGDAWgBRHVPQoljiq65JO G4vu5l32JzmkSTAKBggqhkjOPQQDAgNJADBGAiEA1ThacjiYboKYh69+NllQKiX2 wb7Jztq8zMsY61H/NkYCIQDQc2TQfOl9HBDUoDzUtTZNgIksElkU7ysiSgBhumAA zQ==

----END CERTIFICATE----

Certificate:

Data:

Version: 3 (0x2) Serial Number:

57:f4:69:79:7c:56:7e:ab:88:21:81:42:15:30:dc:fd

Signature Algorithm: ecdsa-with-SHA256

Issuer: O=test, CN=Crypto Authentication Root CA 002

Validity

Not Before: Jul 1 08:00:00 2020 GMT Not After: Jul 1 08:00:00 2040 GMT

```
Subject: O=test, CN=Crypto Authentication Signer FFFF
     Subject Public Key Info:
       Public Key Algorithm: id-ecPublicKey
          Public-Key: (256 bit)
          pub:
            04:21:2e:6d:b3:9f:5c:36:a4:7a:db:71:bd:f2:ae:
            91:f1:b9:52:14:0d:0c:7a:cf:ad:98:94:47:2b:52:
            66:64:3c:a7:7f:15:69:c6:7a:f3:66:a4:48:00:ba:
            5d:06:03:ce:18:b2:e7:fe:4e:e1:e0:07:04:2b:8d:
            e6:b3:ad:be:73
         ASN1 OID: prime256v1
          NIST CURVE: P-256
    X509v3 extensions:
       X509v3 Key Usage: critical
          Digital Signature, Certificate Sign, CRL Sign
       X509v3 Basic Constraints: critical
          CA:TRUE, pathlen:0
       X509v3 Subject Key Identifier:
          72:70:0F:EC:73:E3:56:5F:0A:74:C0:BB:9D:7A:9C:8F:B5:0B:73:17
       X509v3 Authority Key Identifier:
          keyid:47:54:F4:28:96:38:AA:EB:92:4E:1B:8B:EE:E6:5D:F6:27:39:A4:49
  Signature Algorithm: ecdsa-with-SHA256
     30:46:02:21:00:d5:38:5a:72:38:98:6e:82:98:87:af:7e:36:
     59:50:2a:25:f6:c1:be:c9:ce:da:bc:cc:cb:18:eb:51:ff:36:
     46:02:21:00:d0:73:64:d0:7c:e9:7d:1c:10:d4:a0:3c:d4:b5:
     36:4d:80:89:2c:12:59:14:ef:2b:22:4a:00:61:ba:60:00:cd
Validate device certificate...OK
----BEGIN CERTIFICATE----
MIIByDCCAW+gAwIBAgIQdxkpBswUT+e4dShL6tp00jAKBggqhkjOPQQDAjA7MQ0w
CwYDVQQKDAR0ZXN0MSowKAYDVQQDDCFDcnlwdG8gQXV0aGVudGljYXRpb24gU2ln
bmVyIEZGRkYwIBcNMjAwNzAxMDYwMDAwWhgPMjA00DA3MDEwNjAwMDBaMC4xDTAL
BgNVBAoMBHRIc3QxHTAbBgNVBAMMFHNuMDEyMzNFOEExNDkxRjJBNjAxMFkwEwYH
KoZIzj0CAQYIKoZIzj0DAQcDQqAEzxmIvDpsJSAm/nD7NDl62Fo5roEcciv6bl7B
```

6c2pEzs/DpH9OHfyW4yJOzEbrwIDy1EAxM2r66/a8+vVULABJaNgMF4wDAYDVR0T AQH/BAIwADAOBgNVHQ8BAf8EBAMCA4gwHQYDVR0OBBYEFOq8VhE8cCJ6GMCmL3wo X8aNdfnNMB8GA1UdIwQYMBaAFHJwD+xz41ZfCnTAu516nI+1C3MXMAoGCCqGSM49 BAMCA0cAMEQCIANn/QrqxwmwrRsrcYyQpWJ0o4AxLzGoeCZjfJ5o0FAbAiBFne67

----END CERTIFICATE-----

iEzuh6dqwrdQYvqB6+qTxfLyei1kwoFcfVnHvA==

Certificate:

```
Data:
  Version: 3 (0x2)
  Serial Number:
     77:19:29:06:cc:14:4f:e7:b8:75:28:4b:ea:da:74:d2
  Signature Algorithm: ecdsa-with-SHA256
  Issuer: O=test, CN=Crypto Authentication Signer FFFF
  Validity
     Not Before: Jul 1 06:00:00 2020 GMT
     Not After: Jul 1 06:00:00 2048 GMT
  Subject: O=test, CN=sn01233E8A1491F2A601
  Subject Public Key Info:
     Public Key Algorithm: id-ecPublicKey
       Public-Key: (256 bit)
       pub:
          04:cf:19:88:bc:3a:6c:25:20:26:fe:70:fb:34:39:
          7a:d8:5a:39:ae:81:1c:72:2b:fa:6e:5e:c1:e9:cd:
          a9:13:3b:3f:0e:91:fd:38:77:f2:5b:8c:89:3b:31:
          1b:af:02:03:cb:51:00:c4:cd:ab:eb:af:da:f3:eb:
          d5:50:b0:01:25
       ASN1 OID: prime256v1
       NIST CURVE: P-256
  X509v3 extensions:
     X509v3 Basic Constraints: critical
       CA:FALSE
     X509v3 Key Usage: critical
       Digital Signature, Key Agreement
     X509v3 Subject Key Identifier:
       EA:BC:56:11:3C:70:22:7A:18:C0:A6:2F:7C:28:5F:C6:8D:75:F9:CD
    X509v3 Authority Key Identifier:
       keyid:72:70:0F:EC:73:E3:56:5F:0A:74:C0:BB:9D:7A:9C:8F:B5:0B:73:17
Signature Algorithm: ecdsa-with-SHA256
   30:44:02:20:03:67:fd:0a:ea:c7:09:b0:ad:1b:2b:71:8c:90:
   a5:62:74:a3:80:31:2f:31:a8:78:26:63:7c:9e:68:d0:50:1b:
   02:20:45:9d:ee:bb:88:4c:ee:87:a7:6a:c2:b7:50:62:f8:01:
   eb:ea:93:c5:f2:f2:7a:2d:64:c2:81:5c:7d:59:c7:bc
```

## 3. Generating Manifest file

2. Select the Certif	ficate Type t	e keys and provision to device to prototype securesigned element object and store it in manifest fil
Generate_Resources	MCHP Cert	Generate_Manifest
	Custom Cert	

The output log should resemble this:
Generating manifest dataOK (saved to TFLXTLS_devices_manifest.jsor

The Notebook will also generate a manifest file to be uploaded into the public cloud of your choice (Google GCP, AWS IoT and Microsoft Azure).

After running this Notebook, it generates the required resources and program data zone with required secrets, keys and certificates.

For this use case, Validation Authority public key and a public key are loaded into TrustFLEX device in slot 13 and 14 respectively.

## 4 Use Case Prototyping

This hands-on lab is intended to demonstrate how to securely rotate public key in the TrustFLEX device. This uses the PubInvalid feature of the Slot configuration.

Secure Public Key Rotation is sequence of steps for host to update the public key in the TrustFLEX device securely. The basic flow to update the rotating public key is as follows:

- 1. Invalidate existing public key
- 2. Update (write) New rotating public key
- 3. Validate new rotating public key

To perform a validation/invalidation process, its required to have a validation authority. Typically, Validation Authority public key will be loaded to secure element and locked permanently.

This validation/invalidation process includes the authority signing the public key's digest and generating the signature. Authority's public key will be used for verifying the signature with second slot public key's digest.

To update a new rotating public key in the TrustFLEX device, first we need to invalidate the existing public key. By invalidating it, the slot becomes available for write operation and a new public key can be written to it. However, the slot cannot be used for cryptographic operations until its validated.

TrustFLEX device two slots being used for key rotation sequence,


- Validation Authority public key slot 13
- Rotating public key slot 14

The resource generation for TrustFLEX device will generate and load prototyping validation authority and required public keys to TrustFLEX device.


Following sections provide detail steps to execute the usecase both on Jupyter Notebook and on Embedded project.

## 4.1 Running Public Key Rotation example on Jupyter Notebook:


From the Jupyter Home page, navigate to
 TrustFLEX\05\_public\_key\_rotation\notebook\TFLXTLS\_public\_key\_rotation
 .ipynb notebook file and open it.

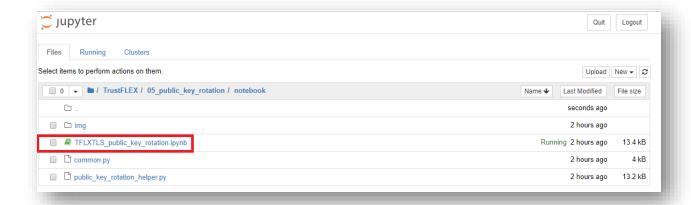


Opening the notebook from Jupyter home page should load the following on the browser,

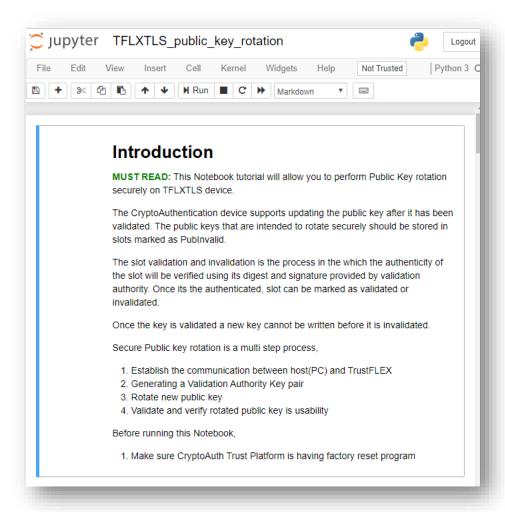

2. Run All Cells by using Kernel -> Restart & Run All

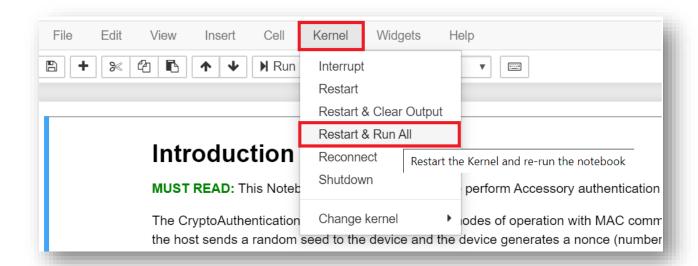

3. It may take a while to complete, wait for the kernel to complete all processing i.e. from Kernel Running to Kernel Idle state (Check circle above **RED** text)

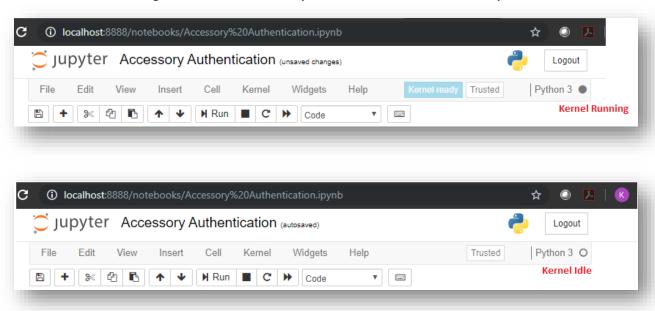

- 4. Navigate through different cells output for the description of the step and result from the execution.
- 5. There are 6 major steps in this lab
  This lab is setup to generate multiple button at the end of the example. These
  buttons perform the tasks listed below.

## Generating a Validation Authority key pair

This step setups a temporary validation authority to perform slot validation and validation process. This is already taken care part of resource generation

Generating a new public key

This step generates a new key pair to rotate the existing public key in the slot. This will be the new public key attempted to load in to PubInvalid slot i.e. for secure public key rotation.

Click on "Gen Rotating Key Pair" button at the bottom of the Notebook. This generates new key to update the existing slot. The button turns RED if there is any error in the execution.



## Authorize public key

Before the new key to be used for writing into the slot, this should be validated by validation authority. In this step, validation authority calculates the Pubkey's digest and signs using its private key.

Click on "Authorize new key" button at the bottom of the Notebook. This authorizes the new public key using validation authority. The button turns RED if there is any error in the execution.



### <u>Update public key</u>

This is the step where actual slot update happens. Before updating the existing slot should be invalidated using existing public key digest and signature provided by the validation authority. This signature should be of existing (old) public key, but not new public key.


Once the slot is invalidated, new public key can be overwritten to this slot. After writing it successfully, the slot remains in invalidated state and doesn't allow any cryptographic operations.

## Validate the rotating public key

This step does the slot validation after writing the new public key into PubInvalid slot i.e. slot14. Unless the slot is validated this cannot be used for cryptographic operations like Verify.

The process of validation involves the Public Key digest, Signature provided by validation authority. During this process, TrustFLEX device initiates internal Public key digest calculation on Slot14. Once the Digest is generated atcab\_verify\_validate will be issued with Slot number and Signature as parameters. On the successful match of digest and signature, the slot will be marked as PubInvalid. This restricts further writes to slot, but enables cryptographic operations using this slot.

Click on "Validate Slot for Rotation Key" button at the bottom of the Notebook to perform Public key authorization, updating to slot and validating the new public key. The button turns RED if there is any error in the execution.

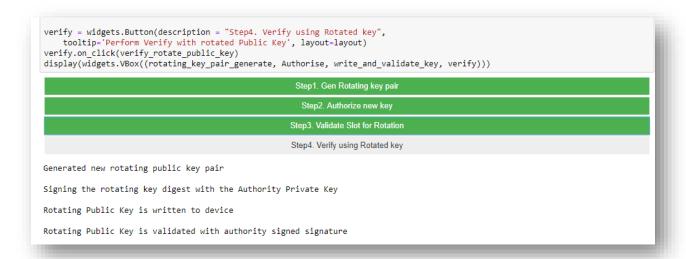

## Verify the rotating public key

Once rotating public key is validated, then the rotating public key can be used for ECC operations. To verify that rotating public key availability for ECC operations, here we perform a sign and verify ECC operation.

First generate a temporary message digest and sign by private key corresponding to new/rotated public key. Then the signature is verified by using rotating public key. If it is verified, then the rotating public key is available for ECC operations or else not.

Click on "Verify Key" button at the bottom of the Notebook to perform verify operation using rotated key. The button turns green if rotated public key can be used for ECC operations or it will turn RED.

Step1. Gen Rotating key pair

Step2. Authorize new key

Step3. Validate Slot for Rotation

Step4. Verify using Rotated key

Generated new rotating public key pair

Signing the rotating key digest with the Authority Private Key

Rotating Public Key is written to device

Rotating Public Key is validated with authority signed signature

Signing with the Rotating Private Key

Verified the Rotating Public key

## 4.2 Running Public Key Rotation on Embedded platform


This usecase can also be executed on Embedded platform. Once the resources are generated, both Atmel Studio and MPLAB projects provided can be used to run the application on CryptoAuth Trust Platform.

This project can only perform Public key rotation steps, but not key generations for validation authority and new public key. It is **required** to use Public Key Rotation Notebook to generate new public key and get it authorized by validation authority. This notebook generates supporting data files like public keys, signatures and nonces for C projects.


Once the new public key is generated and authorized, these embedded projects can be used to rotate the current public key to the new one.

## 4.2.1 MPLAB:


Open pub\_key\_rotate.X project by navigating to MPLAB -> File -> Open Project ->
 TrustFLEX\05\_public\_key\_rotation\firmware\pub\_key\_rotate.X

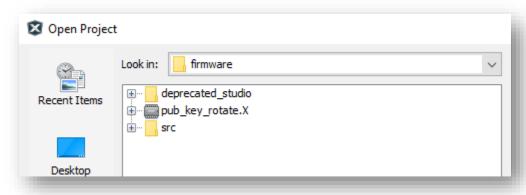


 The application source code pub\_key\_rotate.c is available at TrustFLEX\05\_public\_key\_rotation\firmware\pub\_key\_rotate.c. Other supporting files can be found under assets\dependencies.

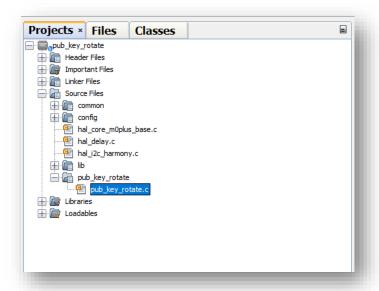

3. Program the Crypto Trust platform by navigating to pub\_key\_rotate -> Make and Program Device

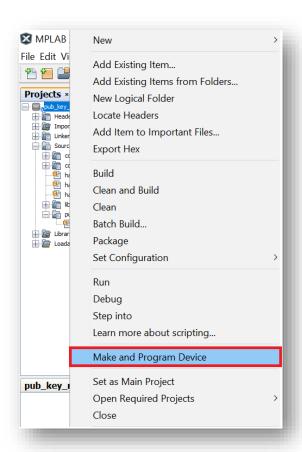


This step may take some time, wait for MPLAB to program the device. Once it is done programming you will see "**Programming complete**" message in Output Window.

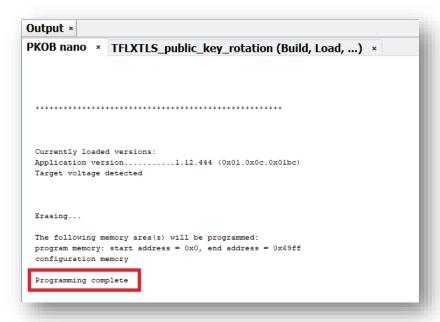

Once the programming is done, the firmware will do public key rotation operation. Depending on the public key rotation operation's output, the Crypto Auth Trust Platform board's Status LED will blink at different rates.


If public key rotation operation succeeds, LED blinks once every second. If public key rotation operation fails, LED blinks five times every second.

It is also possible to view the Console messages by using applications like TeraTerm. Open the application with the COM related to Crypto Auth Trust Platform with 115200-8-N-1 settings

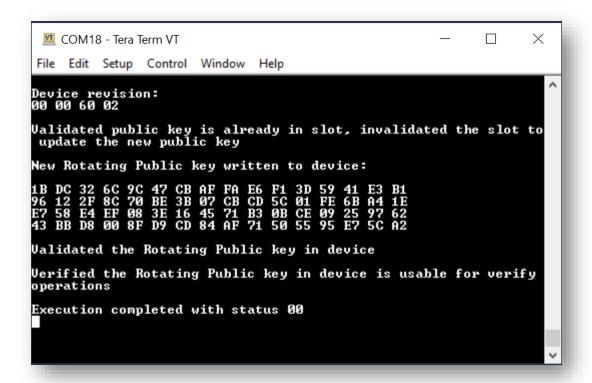


## 4.2.2 Atmel Studio (Deprecated)


Open pub\_key\_rotate.atsIn project by navigating to Atmel Studio -> File -> open > TrustFLEX\05\_public\_key\_rotation\ deprecated\_studio \
 pub\_key\_rotate.atsIn

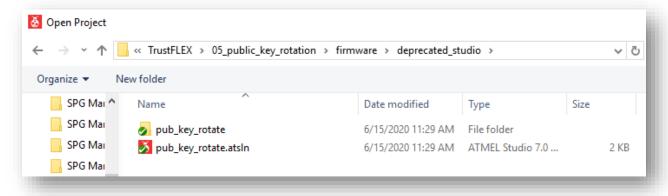

 The application source code pub\_key\_rotate.c is available at TrustFLEX\05\_public\_key\_rotation\firmware\pub\_key\_rotate.c. Other supporting files can be found under assets\dependencies

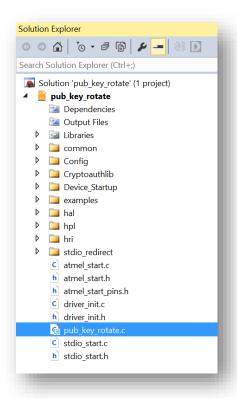

3. Program the Crypto Trust platform by navigating to **Debug -> Start Without Debugging** 

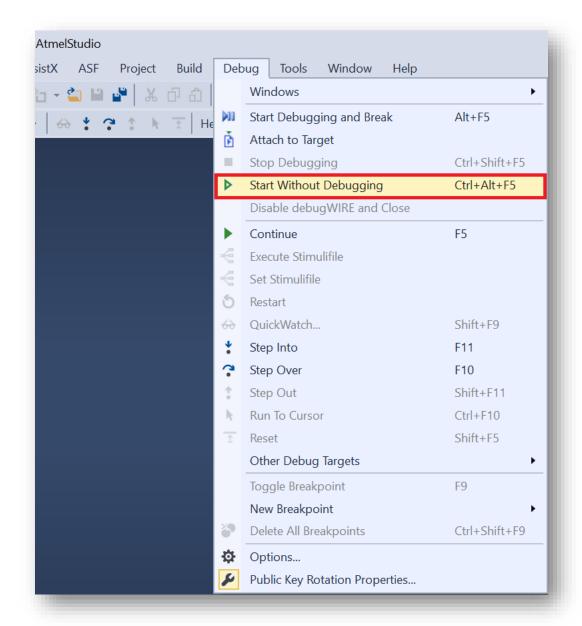


This step may take some time, wait for Atmel Studio to compile and program the device.

Once the programming is done, the firmware will do public key rotation operation. Depending on the public key rotation operation's output, the Crypto Auth Trust Platform board's Status LED will blink at different rates.

If public key rotation operation succeeds, LED blinks once every second. If public key rotation operation fails, LED blinks five times every second.

It is also possible to view the console messages by using applications like TeraTerm. Open the application with the COM related to Crypto Auth Trust Platform with 115200-8-N-1 settings.

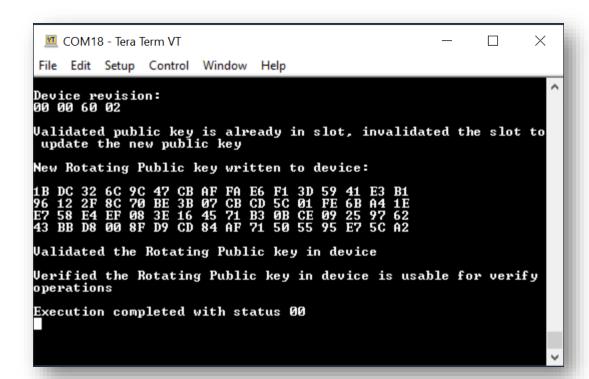

## 4.3 Crypto Auth Trust Platform Factory reset

Once any of the embedded project is loaded to Crypto Auth Trust Platform, the default program that enables interaction with Trust Platform tools will be erased.

Before using the Platform with any other notebook or tools on PC, its required to reprogram the default .hex file. Default hex file is available in cloned directory at assets\Factory\_Program.X\CryptoAuth\_Trust\_Platform.hex

If Trust Platform GUI is provided with MPLAB X IDE installation location, notebooks can program the Factory reset hex file if its not available by default.


This can also be done manually by MPLAB and Atmel Studio

To reprogram using MPLAB:

- 1. Open assets\Factory\_Program.X project in MPLAB IDE
- 2. Program the Crypto Trust platform by navigating to CryptoAuth\_Trust\_Platform\_Factory\_Program -> Make and Program Device

To reprogram using Atmel Studio:

- 1. Navigate to AtmelStudio -> Tools -> Device Programming
- 2. Select Tool as nEDBG and Apply
- 3. Go to Memories and navigate to above path under Flash dropdown
- 4. Check both Erase Flash and Verify Flash
- 5. Click on Program

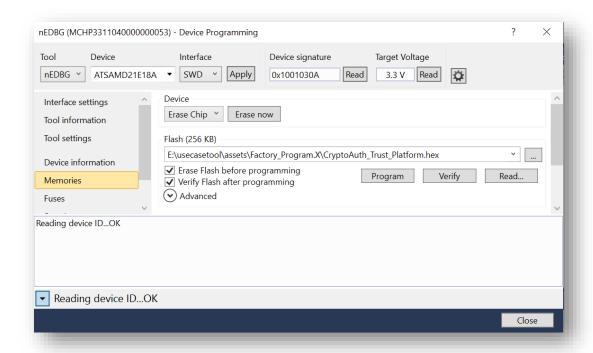

Now, Crypto Auth Trust Platform contains factory programmed application that enables interactions with Notebooks and/or PC tools.

## 5 FAQ

## 1. What are the reasons for "AssertionError: Can't connect to the USB dongle" error?

There are many possibilities like,

- 1. Crypto Trust Platform is having different application than factory reset firmware. Refer to "Crypto Auth Trust Platform Factory reset" section any usecase TrustFLEX Guide for reloading it
- 2. Check the switch positions on Crypto Trust Platform and/or ATECC608A Trust board
  - a. Correct Trust device should be connected and only one device of that type is allowed on the I2C bus. Multiple devices with same address results in error
- 3. Check USB connections to Crypto Trust Platform

## 2. How to reload factory default application to Crypto Trust Platform? Pefer to "Crypto Auth Trust Platform Factory reset" section any usecase Trust Platform.

Refer to "Crypto Auth Trust Platform Factory reset" section any usecase TrustFLEX Guide for reloading it.

# 3. Why does my C projects generates No such file or directory with ../../ ../ 00\_resource\_generation/?

C project generates this error when the resources are not generated prior to using embedded projects. Running the resource generation notebook ensures these files and secrets are generated.

# 4. Before running any use case notebook and/or C project, why is it mandate to execute resource generation?

When resource generation notebook is executed, it generates and programs the required resources like secrets, keys and certificates. These are only prototyping keys and cannot be used for production. These keys will be used part of Usecase notebooks and C projects

## 5. How to know the resources being used in a use case?

Refer to individual Usecase description html for details on transaction diagrams, resources being used and other details. The resources required for given use case is mentioned in INFER CRYPTOGRAPHIC ASSETS section.

# **6. When should I select Custom certificates while doing resource generation?**Custom certificates are required when user wants to have their own root, signer instead of MCHP provided. The difference would be organization name, common name and validity are configurable

## 7. How to know whether C project is executing on Trust Platform or not after programming?

Once the programming is done, the firmware will do use case operation. Depending on the use case operation's output, the Crypto Trust Platform board's status LED will blink at different rates.

If use case operation succeeds, LED blinks once every second. If it fails, LED blinks five times every second.

It is also possible to view the Console messages by using applications like TeraTerm. Open the application with the COM related to Crypto Trust Platform with 115200-8-N-1 settings

# 8. Why is public key rotation project fails with error "Rotating Public key verification failed"?

There are many possibilities like,

- a. Signer registration is not done to the right account
- b. aws client region is select incorrectly
- c. WiFi credentials are not populated or in correct in C project
- d. aws-iot endpoint is not populated or in-correct in C project

## The Microchip Web Site

Microchip provides online support via our web site at http://www.microchip.com/. This web site is used as

a means to make files and information easily available to customers. Accessible by using your favorite Internet browser, the web site contains the following information:

- Product Support Data sheets and errata, application notes and sample programs, design resources, user's guides and hardware support documents, latest software releases and archived software
- General Technical Support Frequently Asked Questions (FAQ), technical support requests, online discussion groups, Microchip consultant program member listing
- Business of Microchip Product selector and ordering guides, latest Microchip press releases, listing of seminars and events, listings of Microchip sales offices, distributors and factory representatives

## **Customer Change Notification Service**

Microchip's customer notification service helps keep customers current on Microchip products. Subscribers will receive e-mail notification whenever there are changes, updates, revisions or errata related to a specified product family or development tool of interest.

To register, access the Microchip web site at <a href="http://www.microchip.com/">http://www.microchip.com/</a>. Under "Support", click on "Customer Change Notification" and follow the registration instructions.

## **Customer Support**

Users of Microchip products can receive assistance through several channels:

- · Distributor or Representative
- Local Sales Office
- Field Application Engineer (FAE)
- Technical Support

Customers should contact their distributor, representative or Field Application Engineer (FAE) for support.

Local sales offices are also available to help customers. A listing of sales offices and locations is included

in the back of this document.

Technical support is available through the web site at: http://www.microchip.com/support

## **Microchip Devices Code Protection Feature**

Note the following details of the code protection feature on Microchip devices:

- Microchip products meet the specification contained in their particular Microchip Data Sheet.
- Microchip believes that its family of products is one of the most secure families of its kind on the market today, when used in the intended manner and under normal conditions.
- There are dishonest and possibly illegal methods used to breach the code protection feature. All of these methods, to our knowledge, require using the Microchip products in a manner outside the operating specifications contained in Microchip's Data Sheets. Most likely, the person doing so is engaged in theft of intellectual property.
- Microchip is willing to work with the customer who is concerned about the integrity of their code.

 Neither Microchip nor any other semiconductor manufacturer can guarantee the security of their code. Code protection does not mean that we are guaranteeing the product as "unbreakable."

Code protection is constantly evolving. We at Microchip are committed to continuously improving the code protection features of our products. Attempts to break Microchip's code protection feature may be

violation of the Digital Millennium Copyright Act. If such acts allow unauthorized access to your software or other copyrighted work, you may have a right to sue for relief under that Act.

## **Legal Notice**

а

Information contained in this publication regarding device applications and the like is provided only for your convenience and may be superseded by updates. It is your responsibility to ensure that your application meets with your specifications. MICROCHIP MAKES NO REPRESENTATIONS OR WARRANTIES OF ANY KIND WHETHER EXPRESS OR IMPLIED, WRITTEN OR ORAL, STATUTORY

OR OTHERWISE, RELATED TO THE INFORMATION, INCLUDING BUT NOT LIMITED TO ITS CONDITION, QUALITY, PERFORMANCE, MERCHANTABILITY OR FITNESS FOR PURPOSE. Microchip disclaims all liability arising from this information and its use. Use of Microchip devices in life support and/or safety applications is entirely at the buyer's risk, and the buyer agrees to defend, indemnify and hold harmless Microchip from any and all damages, claims, suits, or expenses resulting from such use. No licenses are conveyed, implicitly or otherwise, under any Microchip intellectual property rights unless otherwise stated.

## **Trademarks**

The Microchip name and logo, the Microchip logo, AnyRate, AVR, AVR logo, AVR Freaks, BitCloud, chipKIT, chipKIT logo, CryptoMemory, CryptoRF, dsPIC, FlashFlex, flexPWR, Heldo, JukeBlox, KeeLog,

Kleer, LANCheck, LINK MD, maXStylus, maXTouch, MediaLB, megaAVR, MOST, MOST logo, MPLAB,

OptoLyzer, PIC, picoPower, PICSTART, PIC32 logo, Prochip Designer, QTouch, SAM-BA, SpyNIC, SST.

SST Logo, SuperFlash, tinyAVR, UNI/O, and XMEGA are registered trademarks of Microchip Technology

Incorporated in the U.S.A. and other countries.

ClockWorks, The Embedded Control Solutions Company, EtherSynch, Hyper Speed Control, HyperLight

Load, IntelliMOS, mTouch, Precision Edge, and Quiet-Wire are registered trademarks of Microchip Technology Incorporated in the U.S.A.

Adjacent Key Suppression, AKS, Analog-for-the-Digital Age, Any Capacitor, AnyIn, AnyOut, BodyCom, CodeGuard, CryptoAuthentication, CryptoAutomotive, CryptoCompanion, CryptoController, dsPICDEM, dsPICDEM.net, Dynamic Average Matching, DAM, ECAN, EtherGREEN, In-Circuit Serial Programming.

ICSP, INICnet, Inter-Chip Connectivity, JitterBlocker, KleerNet, KleerNet logo, memBrain, Mindi, MiWi, motorBench, MPASM, MPF, MPLAB Certified logo, MPLIB, MPLINK, MultiTRAK, NetDetach, Omniscient

Code Generation, PICDEM, PICDEM.net, PICkit, PICtail, PowerSmart, PureSilicon, QMatrix, REAL ICE,

Ripple Blocker, SAM-ICE, Serial Quad I/O, SMART-I.S., SQI, SuperSwitcher, SuperSwitcher II, Total Endurance, TSHARC, USBCheck, VariSense, ViewSpan, WiperLock, Wireless DNA, and ZENA are trademarks of Microchip Technology Incorporated in the U.S.A. and other countries.

SQTP is a service mark of Microchip Technology Incorporated in the U.S.A.

Silicon Storage Technology is a registered trademark of Microchip Technology Inc. in other countries.

GestIC is a registered trademark of Microchip Technology Germany II GmbH & Co. KG, a subsidiary of Microchip Technology Inc., in other countries.

All other trademarks mentioned herein are property of their respective companies.

© 2018, Microchip Technology Incorporated, Printed in the U.S.A., All Rights Reserved.

ISBN:

## **Quality Management System Certified by DNV**

### ISO/TS 16949

Microchip received ISO/TS-16949:2009 certification for its worldwide headquarters, design and wafer fabrication facilities in Chandler and Tempe, Arizona; Gresham, Oregon and design centers in California

and India. The Company's quality system processes and procedures are for its PIC® MCUs and dsPIC® DSCs, KEELOQ® code hopping devices, Serial EEPROMs, microperipherals, nonvolatile memory and analog products. In addition, Microchip's quality system for the design and manufacture of development systems is ISO 9001:2000 certified.



## **Worldwide Sales and Service**

## **AMERICAS Corporate Office**

2355 West Chandler Blvd. Chandler, AZ 85224-6199 Tel: 480-792-7200 Fax: 480-792-7277

Technical Support:

http://www.microchip.com/ support

### Web Address:

www.microchip.com

### Atlanta

Duluth, GA Tel: 678-957-9614 Fax: 678-957-1455

Austin, TX Tel: 512-257-3370

## **Boston**

Westborough, MA Tel: 774-760-0087 Fax: 774-760-0088

#### Chicago Itasca, IL

Tel: 630-285-0071 Fax: 630-285-0075

### Dallas Addison, TX

Tel: 972-818-7423 Fax: 972-818-2924

### Detroit Novi, MI

Tel: 248-848-4000 Houston, TX

## Tel: 281-894-5983

### Indianapolis Noblesville, IN

Tel: 317-773-8323 Fax: 317-773-5453 Tel: 317-536-2380

### Los Angeles

Mission Viejo, CA Tel: 949-462-9523 Fax: 949-462-9608

Tel: 951-273-7800 Raleigh, NC

## Tel: 919-844-7510

New York, NY Tel: 631-435-6000

## San Jose, CA

Tel: 408-735-9110 Tel: 408-436-4270

### Canada - Toronto Tel: 905-695-1980

Fax: 905-695-2078

### ASIA/PACIFIC

Australia - Sydney Tel: 61-2-9868-6733

China - Beijing Tel: 86-10-8569-7000

China - Chengdu

Tel: 86-28-8665-5511

China - Chongqing

Tel: 86-23-8980-9588

China - Dongguan Tel: 86-769-8702-9880

China - Guangzhou

Tel: 86-20-8755-8029

China - Hangzhou

Tel: 86-571-8792-8115

China - Hong Kong SAR Tel: 852-2943-5100

China - Nanjing

Tel: 86-25-8473-2460

China - Qinadao

Tel: 86-532-8502-7355

China - Shanghai Tel: 86-21-3326-8000

China - Shenyang

Tel: 86-24-2334-2829

China - Shenzhen

Tel: 86-755-8864-2200

China - Suzhou Tel: 86-186-6233-1526

China - Wuhan

Tel: 86-27-5980-5300

China - Xian

Tel: 86-29-8833-7252

China - Xiamen Tel: 86-592-2388138

China - Zhuhai

Tel: 86-756-3210040

## ASIA/PACIFIC

India - Bangalore Tel: 91-80-3090-4444

India - New Delhi

Tel: 91-11-4160-8631

India - Pune

Tel: 91-20-4121-0141

Japan - Osaka

Tel: 81-6-6152-7160

Japan - Tokyo

Tel: 81-3-6880- 3770

Korea - Daegu Tel: 82-53-744-4301

Korea - Seoul

Tel: 82-2-554-7200

Malaysia - Kuala Lumpur

Tel: 60-3-7651-7906 Malaysia - Penang

Tel: 60-4-227-8870

Philippines - Manila

Tel: 63-2-634-9065

Singapore

Tel: 65-6334-8870

Taiwan - Hsin Chu

Tel: 886-3-577-8366

Taiwan - Kaohsiung

Tel: 886-7-213-7830

Taiwan - Taipei

Tel: 886-2-2508-8600

Thailand - Bangkok

Tel: 66-2-694-1351

Vietnam - Ho Chi Minh

Tel: 84-28-5448-2100

### **EUROPE**

Austria - Wels

Tel: 43-7242-2244-39

Fax: 43-7242-2244-393 Denmark - Copenhagen

Tel: 45-4450-2828

Fax: 45-4485-2829

Finland - Espoo

Tel: 358-9-4520-820

France - Paris

Tel: 33-1-69-53-63-20 Fax: 33-1-69-30-90-79

France - Saint Cloud

Tel: 33-1-30-60-70-00

**Germany - Garching** 

Tel: 49-8931-9700

Germany - Haan

Tel: 49-2129-3766400

Germany - Heilbronn

Tel: 49-7131-67-3636

Germany - Karlsruhe

Tel: 49-721-625370

**Germany - Munich** Tel: 49-89-627-144-0

Fax: 49-89-627-144-44

Germany - Rosenheim

Tel: 49-8031-354-560

Israel - Ra'anana

Tel: 972-9-744-7705

Italy - Milan

Tel: 39-0331-742611

Fax: 39-0331-466781

Italy - Padova

Tel: 39-049-7625286 Netherlands - Drunen

Tel: 31-416-690399

Fax: 31-416-690340

Norway - Trondheim

Tel: 47-7289-7561

Poland - Warsaw Tel: 48-22-3325737

Romania - Bucharest

Tel: 40-21-407-87-50

Spain - Madrid Tel: 34-91-708-08-90

Fax: 34-91-708-08-91

Sweden - Gothenberg

Tel: 46-31-704-60-40

Sweden - Stockholm Tel: 46-8-5090-4654

UK - Wokingham Tel: 44-118-921-5800 Fax: 44-118-921-5820