SCHLUMBERGER

ELECTRICAL LOG

COUNTY HARRIS
FIELD or LOCATION WATER WELL
WELL AIR PRODUCTS & CHEMICALS #2
COMPANY TEXAS WATER WELLS INC.

COMPANY TEXAS WATER WELLS INC. LJ-65-24-7
WELL AIR PRODUCTS & CHEMICALS #2
FIELD WATER WELL
COUNTY HARRIS STATE TEXAS
LOCATION N/A
Other Services: NONE
Sec. ___ Twp. ___ Rge. ___

Permanent Datum: GROUND LEVEL, Elev. N/A
Log Measured From K.B., G Ft. Above Perm. Datum
Drilling Measured From K.B.
Elev.: K.B. -
D.F. -
G.L. -

Date	7-3-68			
Run No.	ONE			
Depth—Driller	583			
Depth—Logger	583			
Btm. Log Interval	582			
Top Log Interval	100			
Casing—Driller	- @ -	@	@	@
Casing—Logger	----			
Bit Size	9 7/8			
Type Fluid in Hole	NAT.			
Dens. | Visc.	9.0 | 34			
pH | Fluid Loss	- | - ml	ml	ml	ml
Source of Sample	PIT			
R_m @ Meas. Temp.	15.3 @ 87 °F	@ °F	@ °F	@ °F
R_{mf} @ Meas. Temp.	- @ - °F	@ °F	@ °F	@ °F
R_{mc} @ Meas. Temp.	- @ - °F	@ °F	@ °F	@ °F
Source: R_{mf} | R_{mc}	- | -			
R_m @ BHT	- @ - °F	@ °F	@ °F	@ °F
Time Since Circ.	3 HOURS			
Max. Rec. Temp.	- °F	°F	°F	°F
Equip. | Location	7029 | VICT.			
Recorded By	VACCA			
Witnessed By	MR. TIMMERMAN			

FOLD HERE The well name, location and borehole reference data were furnished by the customer.

REMARKS

Changes in Mud Type or Additional Samples		
Date | Sample No.		
Depth—Driller		
Type Fluid in Hole		
Dens. | Visc.		
ph | Fluid Loss	ml	
Source of Sample		
R_m @ Meas. Temp.	@ °F	@ °F
R_{mf} @ Meas. Temp.	@ °F	@ °F
R_{mc} @ Meas. Temp.	@ °F	@ °F
Source: R_{mf} | R_{mc}		
R_m @ BHT	@ °F	@ °F
R_{mf} @ BHT	@ °F	@ °F
R_{mc} @ BHT	@ °F	@ °F

Scale Changes			
Type Log	Depth	Scale Up Hole	Scale Down Hole

Equipment Data				
Run No.	Tool Type	Pad Type	Tool Pos.	Other

7-05-68 121

SPONTANEOUS POTENTIAL millivolts	Depths	RESISTIVITY ohms. m²/m	RESISTIVITY ohms. m²/m
– |10| +	2" = 100	SHORT NORMAL 0 — 50 0 — 500 LONG NORMAL 0 — 50 0 — 500 AMP SHORT NORMAL 0 — 10	18'8" LATERAL 0 — 50 0 — 500

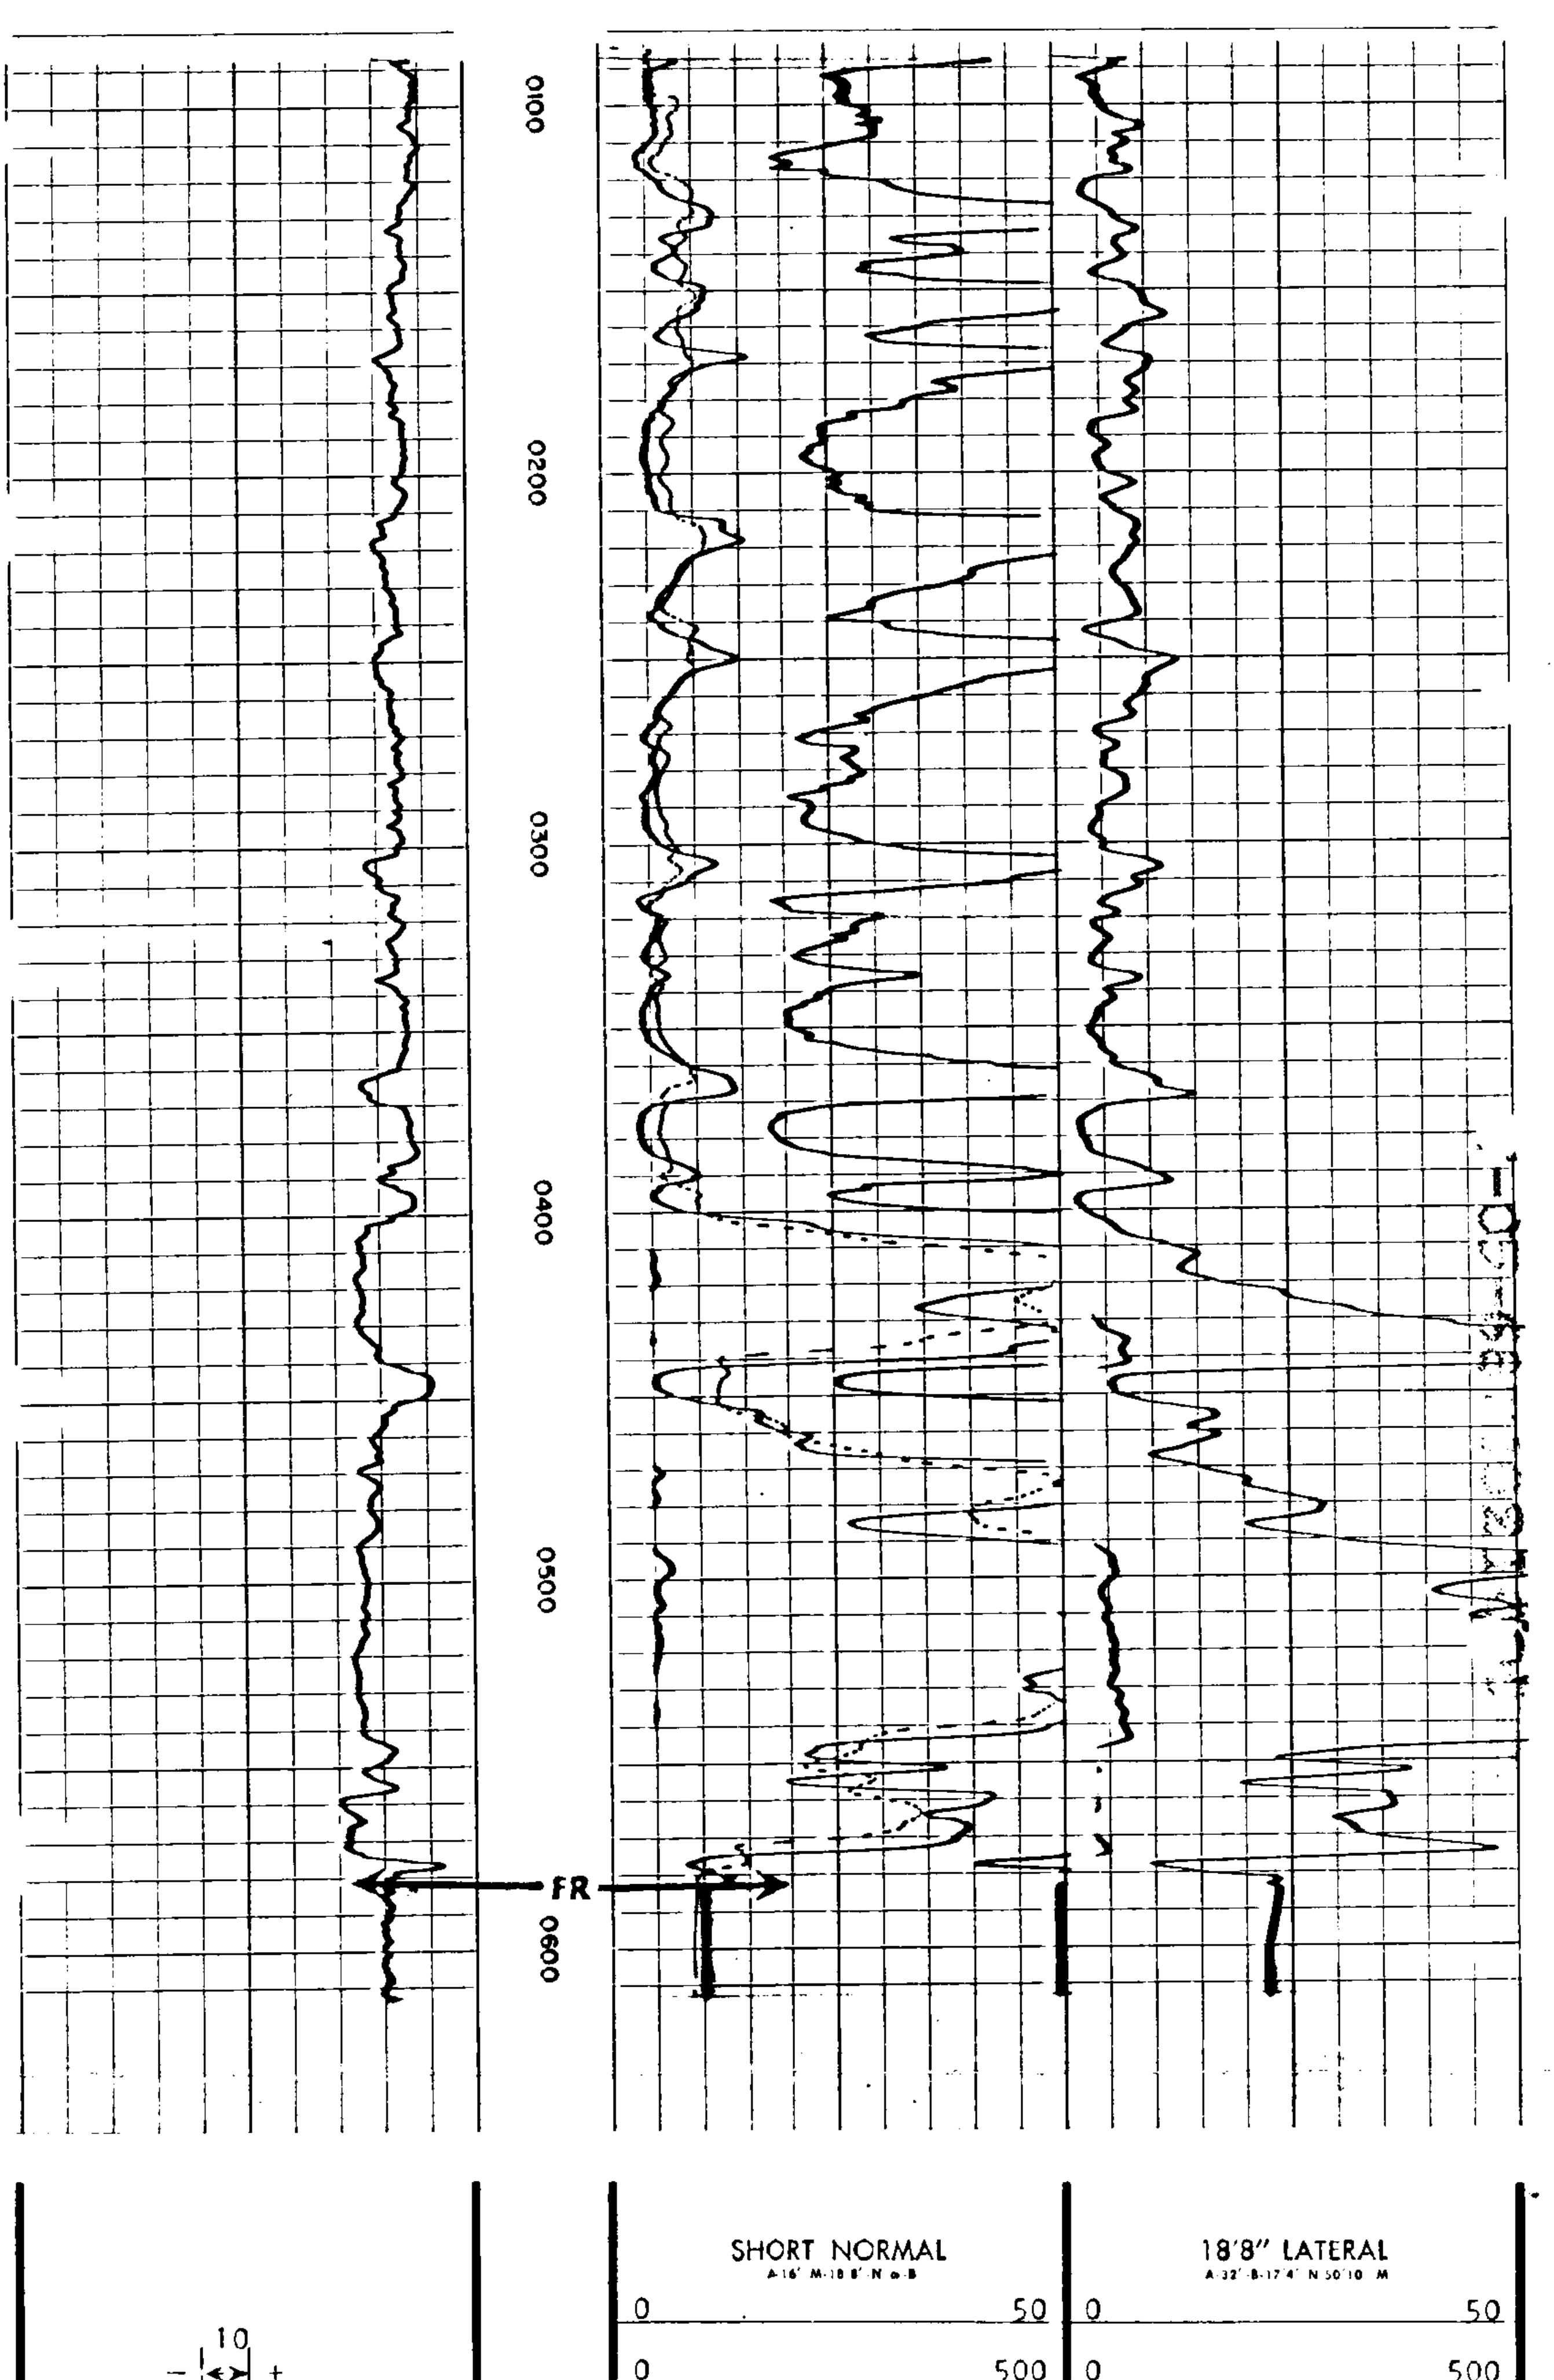

– |10| +		SHORT NORMAL A-16" M-18'8" N∞B 0 — 50 0 — 500 LONG NORMAL A-64" M-65'6" N∞B 0 — 50 0 — 500 AMP SHORT NORMAL 0 — 10	18'8" LATERAL A-32' B-17'4" N-50'10" M 0 — 50 0 — 500
SPONTANEOUS POTENTIAL millivolts	Depths	RESISTIVITY ohms. m²/m	RESISTIVITY ohms. m²/m

COMPANY TEXAS WATER WELLS INC.
WELL AIR PRODUCTS & CHEMICALS #2
FIELD WATER WELL
COUNTY HARRIS STATE TEXAS

SCHL. FR 582
SCHL. TD 583
DRLR TD 583
Elev:
KB N/A
DF N/A
GL N/A

DETAIL LOG

5 = 100'

SPONTANEOUS POTENTIAL millivolts	Depths	RESISTIVITY ohms. m²/m	RESISTIVITY ohms. m²/m
– |10| +		SHORT NORMAL A-16" M-18'8" N∞B 0 — 50 0 — 500 LONG NORMAL A-64" M-65'6" N∞B 0 — 50 0 — 500 AMP SHORT NORMAL 0 — 10	18'8" LATERAL A-32' B-17'4" N-50'10" M 0 — 50 0 — 500

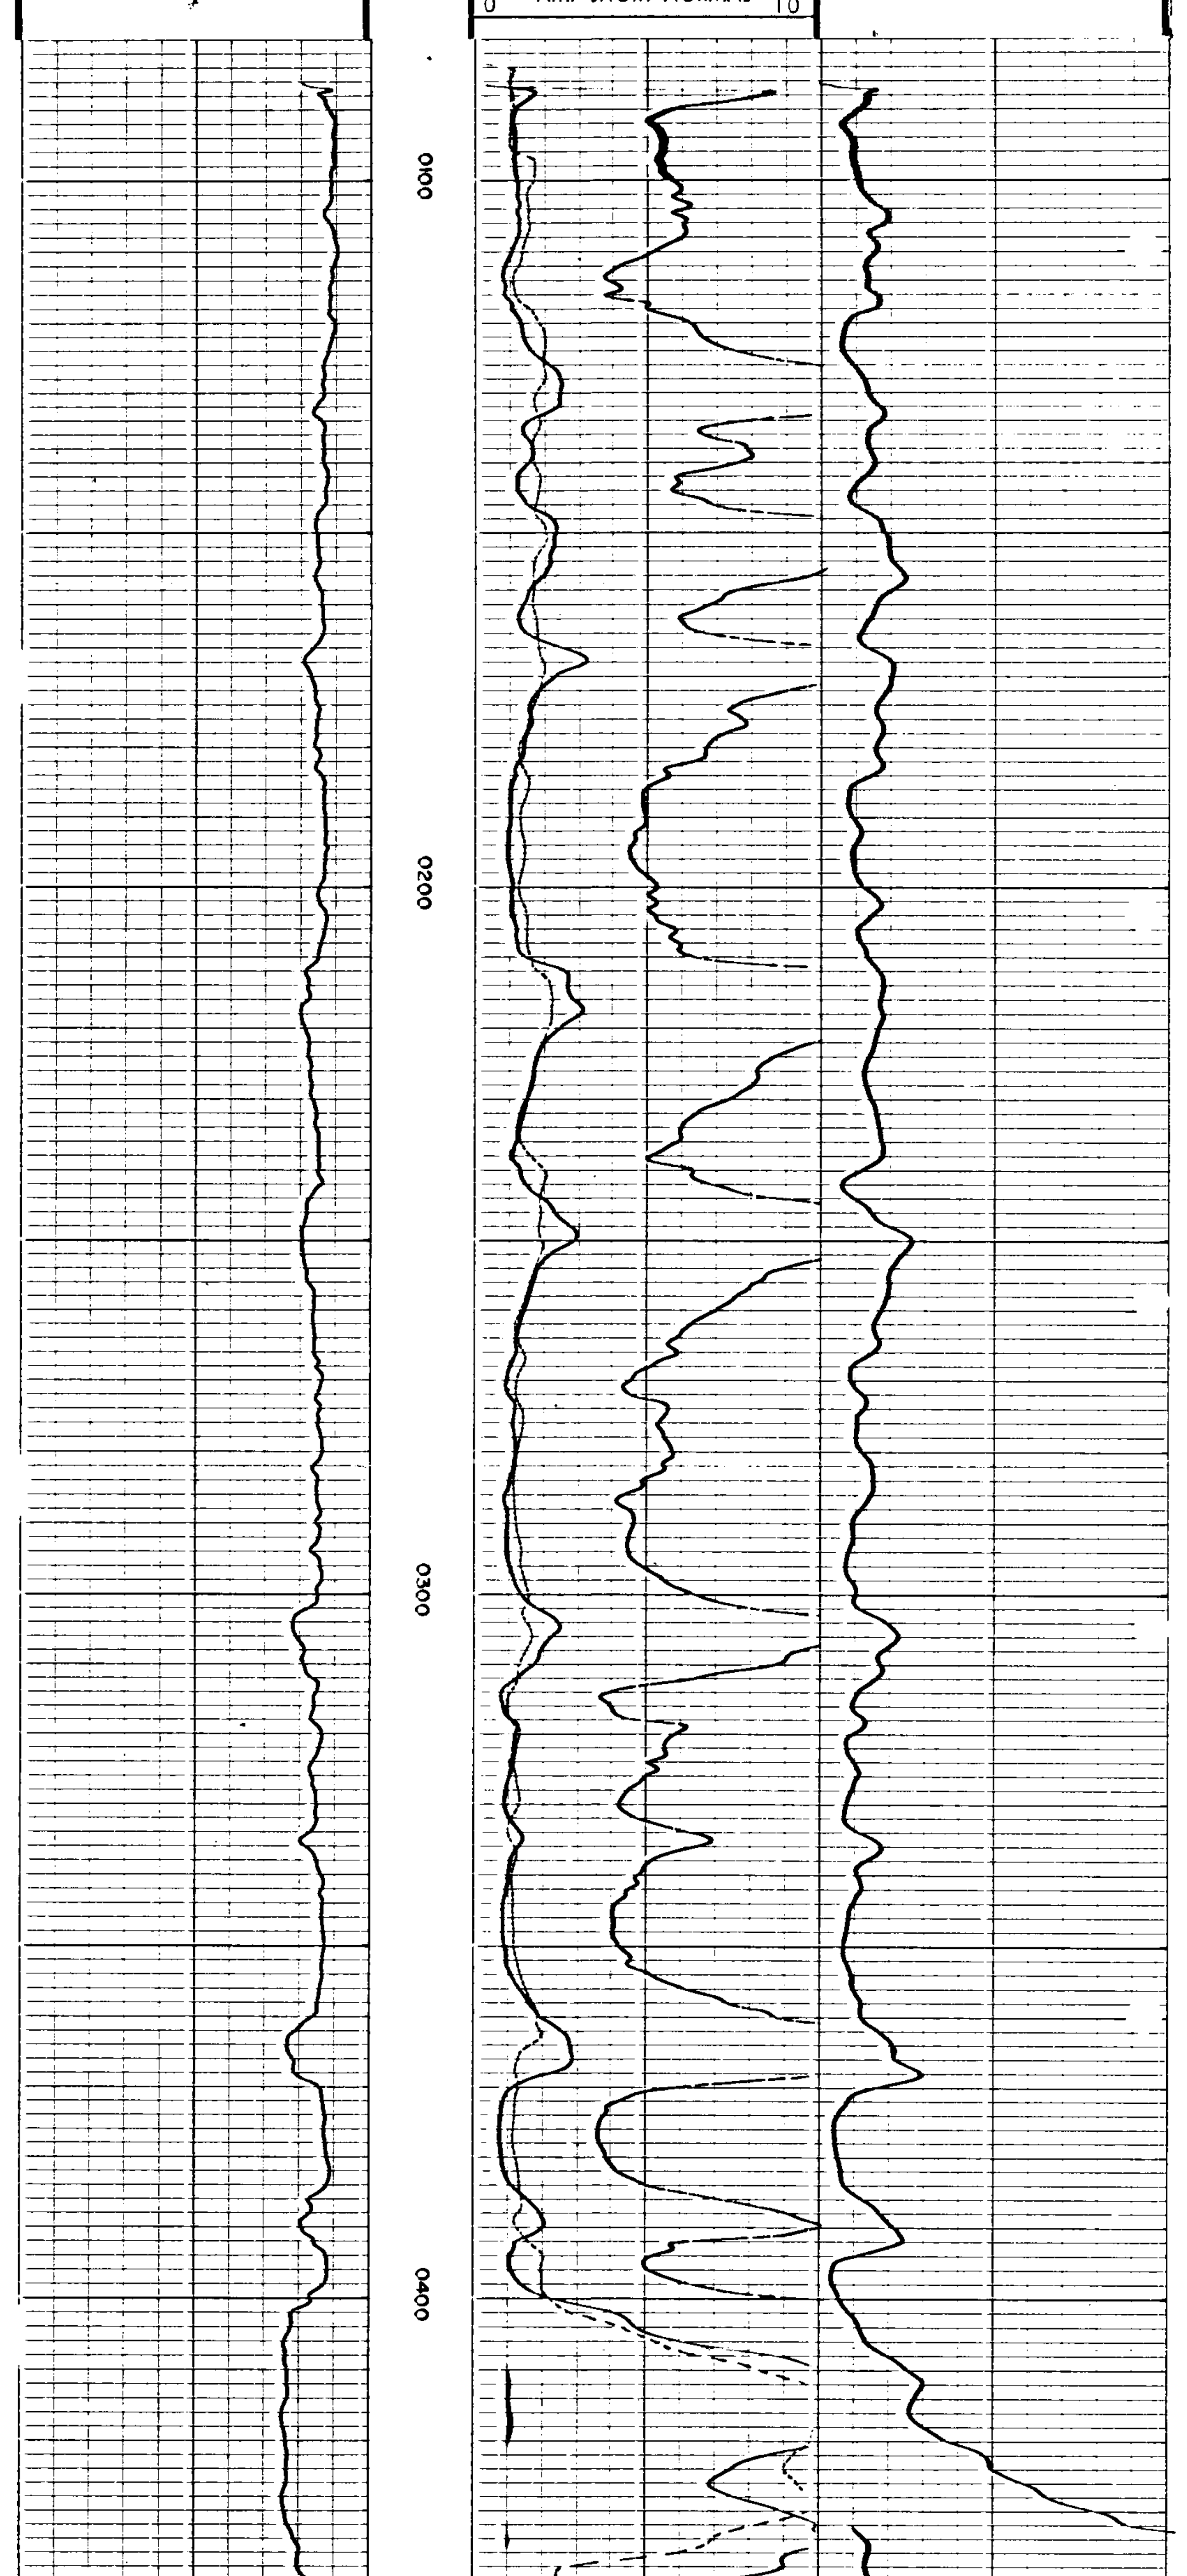

– |10| +		SHORT NORMAL A-16" M-18'8" N∞B 0 — 50 0 — 500 LONG NORMAL A-64" M-65'6" N∞B 0 — 50 0 — 500 AMP SHORT NORMAL 0 — 10	18'8" LATERAL A-32' B-17'4" N-50'10" M 0 — 50 0 — 500
SPONTANEOUS POTENTIAL millivolts	Depths	RESISTIVITY ohms. m²/m	RESISTIVITY ohms. m²/m

COMPANY TEXAS WATER WELLS INC.
WELL AIR PRODUCTS & CHEMICALS #2
FIELD WATER WELL
COUNTY HARRIS STATE TEXAS

SCHL. FR 582
SCHL. TD 583
DRLR TD 583
Elev:
KB N/A
DF N/A
GL N/A

SWS-705 A

JAN 13 1969
Texas Water Development Board