Welex

INDUCTION LOG

COMPANY ALSAY-PIPPIN CORP.
WELL HORSEPEN BAYOU
M.U.D. #1
FIELD WILDCAT
County HARRIS State TEX.

65-12-1X
KR

COMPANY ALSAY-PIPPIN CORP.
WELL HORSEPEN BAYOU M.U.D. #1
FIELD WILDCAT
COUNTY HARRIS STATE TEXAS

RECEIVED FEB 12 1980

Location
Sec.____ Twp.____ Rge.____

Other Services:
NONE

Permanent Datum GROUND LEVEL Elev.____
Log Measured From TOP K. B. 5 Ft. Above Perm. Datum
Drilling Measured From TOP K. B.

Elev.: K.B.____
D.F.____
G.L.____

Date	1-18-80			
Run No.	ONE			
Depth—Driller	1156'			
Depth—Welex	1158'			
Btm. Log Inter.	1156'			
Top Log Inter.	30'			
Casing—Driller	24" @ 30'	@	@	@
Casing—Welex				
Bit Size	12-1/4"			
Type Fluid in Hole	WATER BASE MUD			
Dens. | Visc.	10.1 | 36	|	|	|
pH | Fluid Loss	7.8 | 2.0ml	| ml	| ml	| ml
Source of Sample	PIT			
R_m @ Meas. Temp.	5.10 @ 75°F	@ °F	@ °F	@ °F
R_{mf} @ Meas. Temp.	4.90 @ 75°F	@ °F	@ °F	@ °F
R_{mc} @ Meas. Temp.	5.30 @ 75°F	@ °F	@ °F	@ °F
Source R_{mf} R_{mc}	MEAS. | MEAS.	|	|	|
R_m @ BHT	3.80 @ 101°F	@ °F	@ °F	@ °F
Time Since Circ.	1 HOUR			
Max. Rec. Temp.	101°F @ T.D.	°F @	°F @	°F @
Equip. | Location	1905 | RICH.	|	|	|
Recorded By	BURKETT			
Witnessed By	MR. ENGLAND			

Fold Here

Change in Mud Type or Additional Samples

Date | Sample No.	|	|
Depth—Driller		
Type Fluid in Hole		
Dens. | Visc.	|	|
ph | Fluid Loss	| ml	|
Source of Sample		
R_m @ Meas. Temp.	@ °F	@ °F
R_{mf} @ Meas. Temp.	@ °F	@ °F
R_{mc} @ Meas. Temp.	@ °F	@ °F
Source: R_{mf} | R_{mc}	|	|
R_m @ BHT	3.80 @ 101°F	@ °F
R_{mf} BHT	3.60 @ 101°F	@ °F
R_{mc} BHT	3.90 @ 101°F	@ °F
Service Ticket No.	054637	Remarks:

SCALE CHANGES

Type Log	Depth	Scale Up Hole	Scale Down Hole

EQUIPMENT DATA

Run No.	Tool Type and No.	Pad Type	Tool Position	Other

Remarks:

Welex does not guarantee the accuracy of any interpretation of log data, conversion of log data to physical rock parameters, or recommendations which may be given by Welex personnel or which may appear on the log or in any other form. Any user of such data, interpretations, conversions, or recommendations agrees that Welex is not responsible, except where due to gross negligence or wilful misconduct, for any loss, damages, or expenses resulting from the use thereof.

POTENTIAL MILLIVOLTS

— → 10 ← — +

Rmf 3.60 at 101 °F.

RESISTIVITY OHMS M2/M

0	Guard	50
0		500
0 Amp.	Guard	10
0	Induction	50
0		500

CONDUCTIVITY M MHOS/M

500	Induction	0
1000		500

RESISTIVITY OHMS M2/M

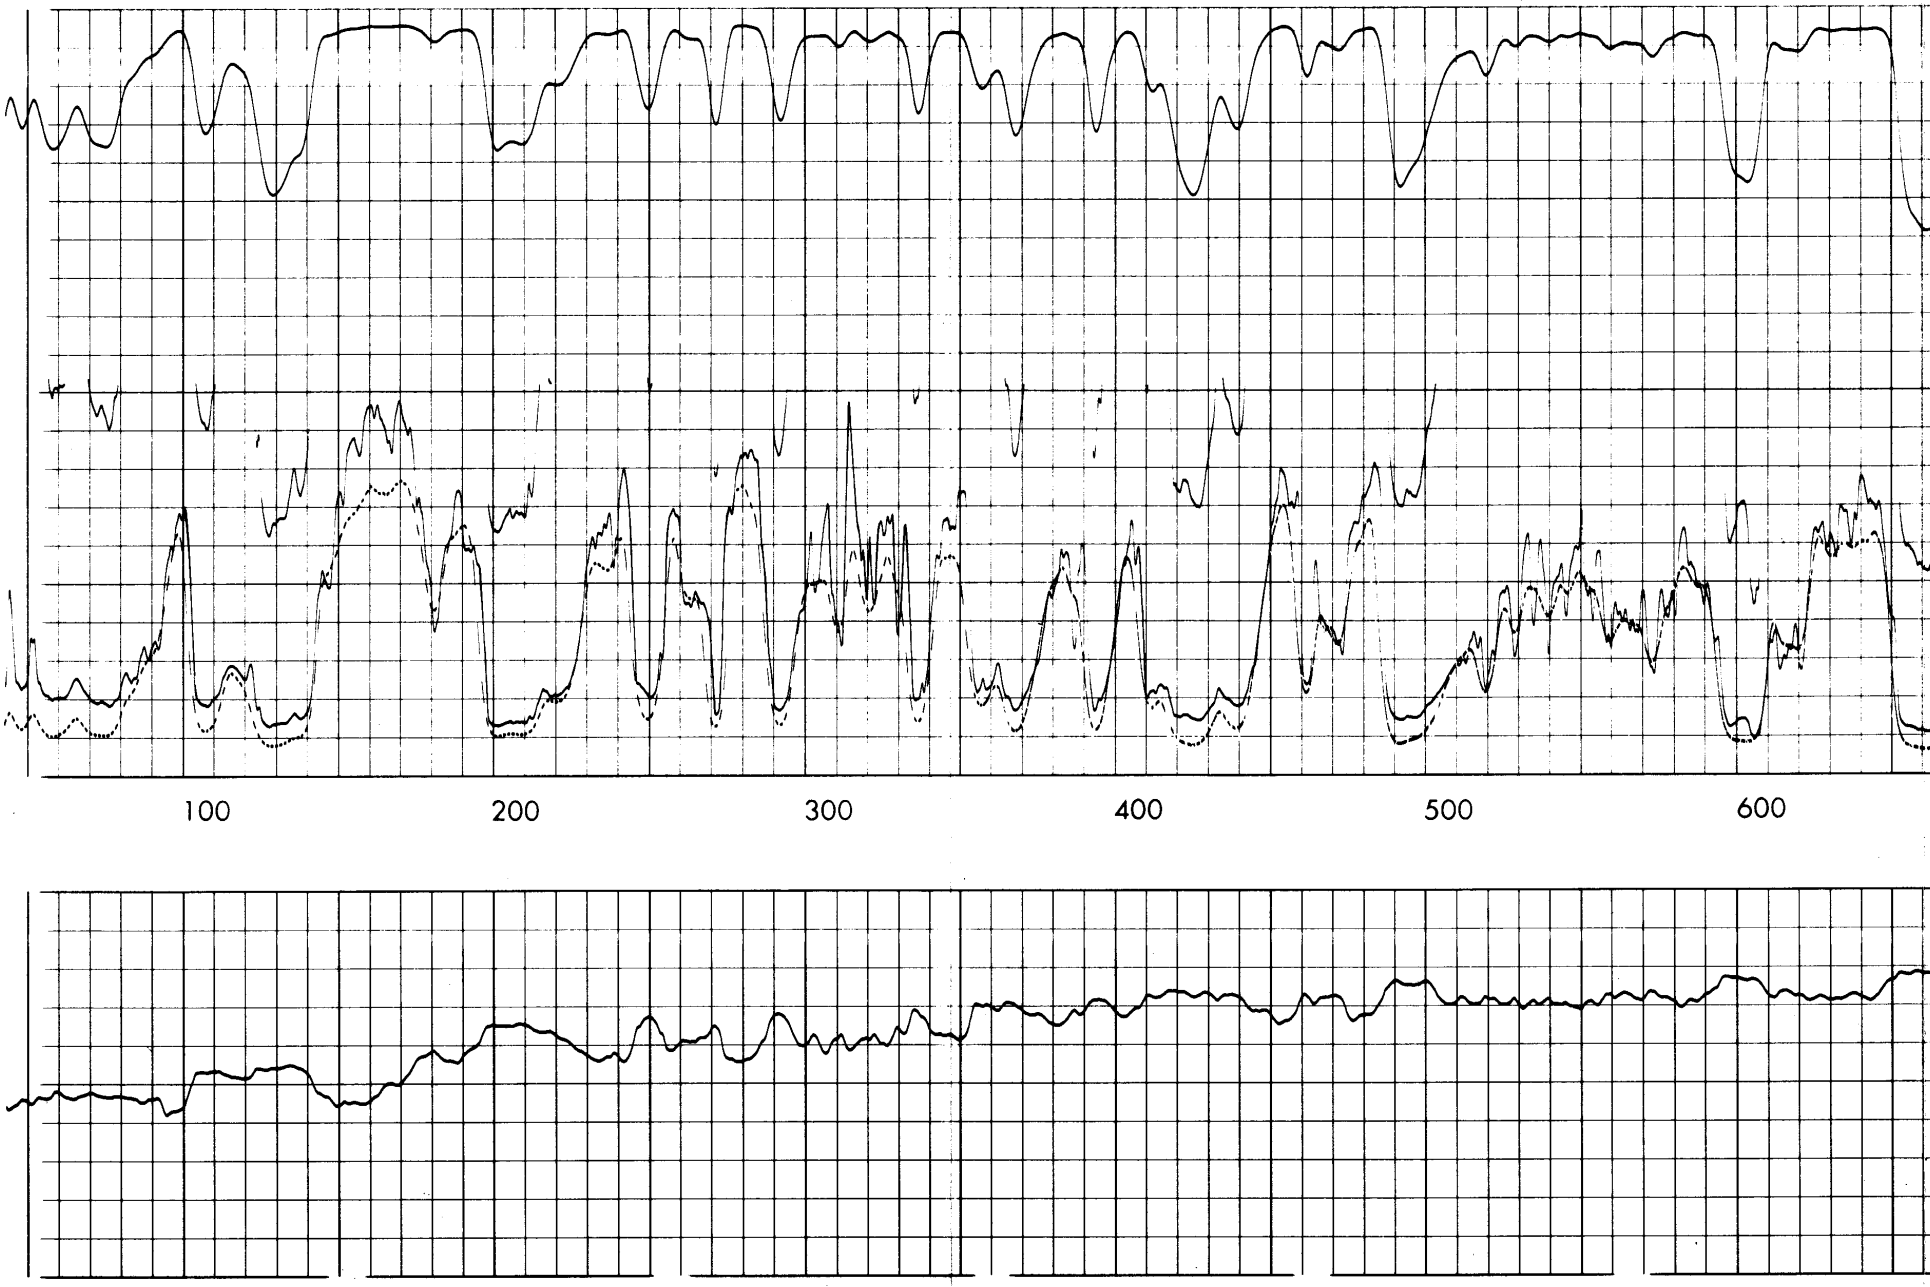

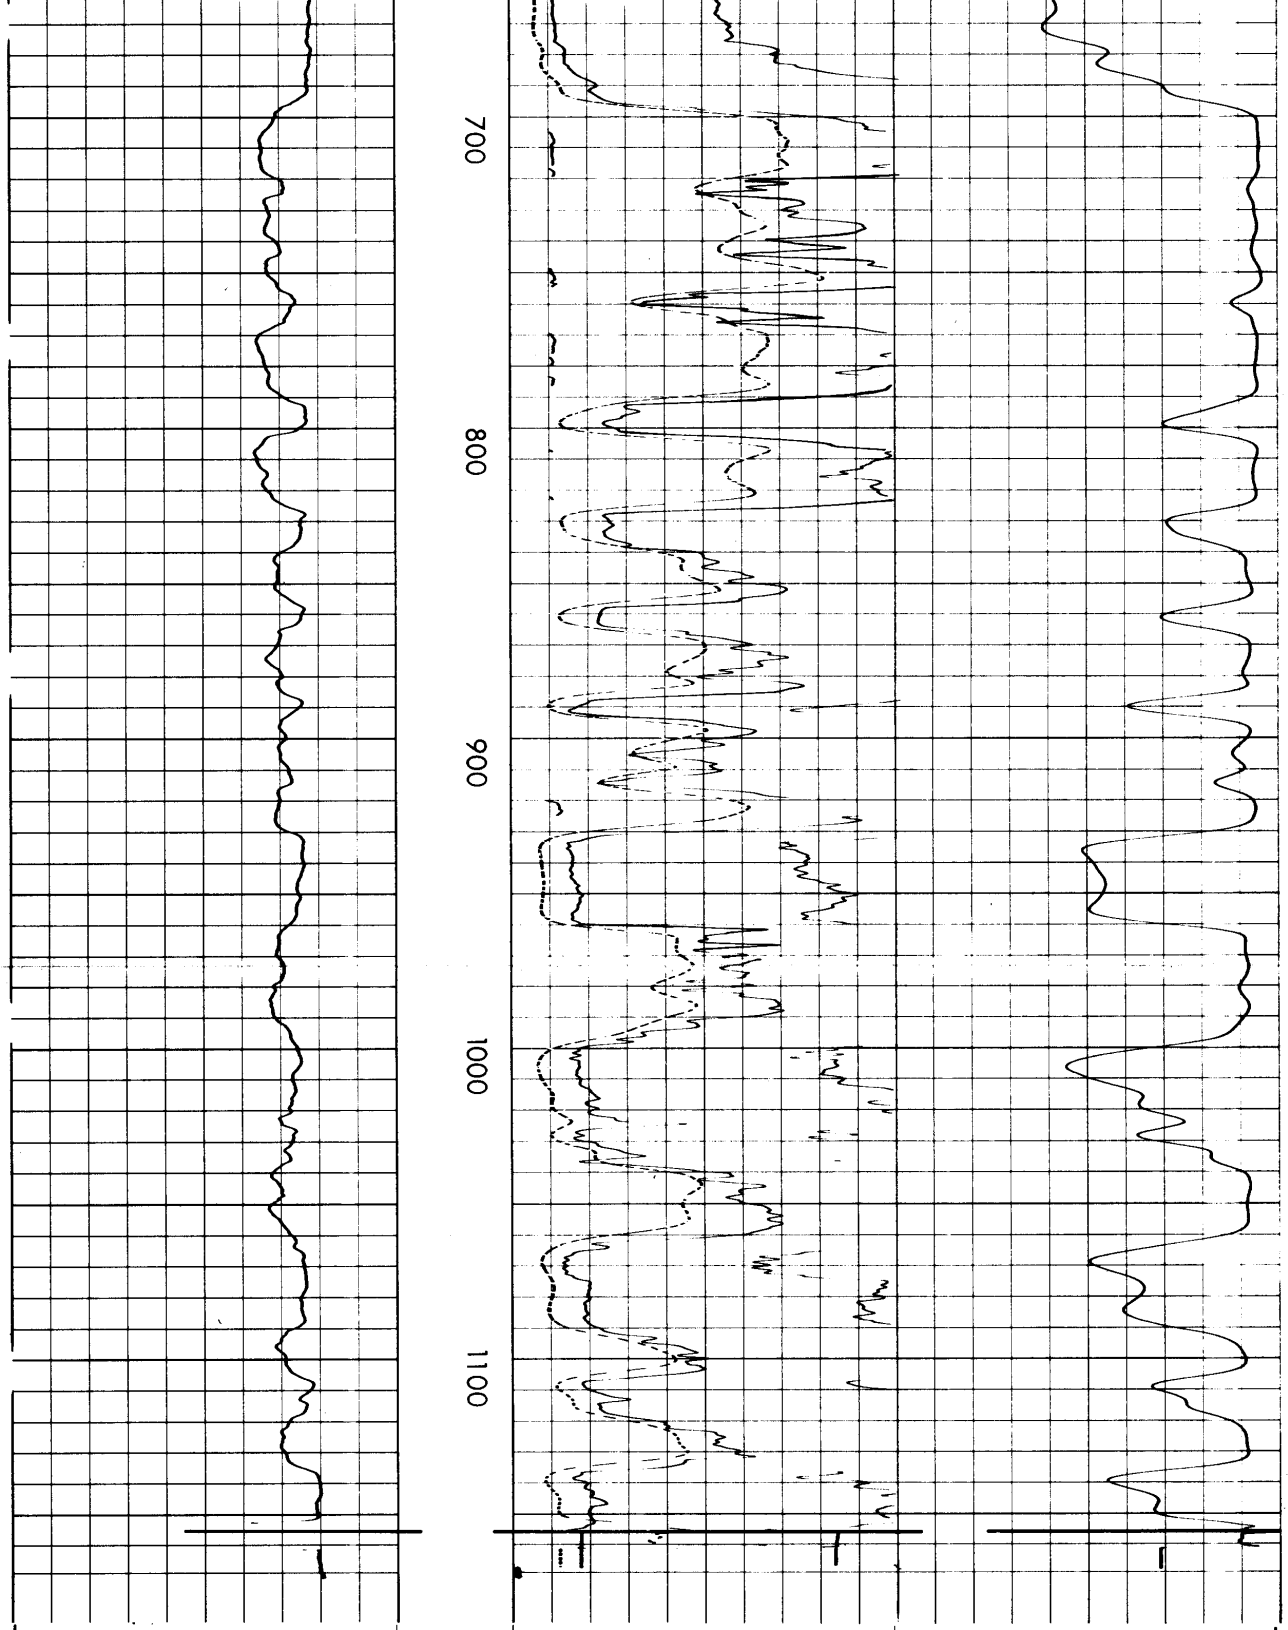

Rmf 3.60 at 101 °F.

— →10← +

POTENTIAL MILLIVOLTS

0 Induction 50

0 500

0 Guard 50

0 500

0 Amp. Guard 10

RESISTIVITY OHMS M²/M

RESISTIVITY OHMS M²/M

500 Induction 0

1000 500

CONDUCTIVITY M MHOS/M

ALSAY-PIPPIN CORP.
HORSEPEN BAYOU M.U.D. #1
WILDCAT
HARRIS COUNTY, TEXAS

T.D. LOGGED	1156'
T.D. DRILLER	1156'
T.D. WELEX	1158'

5" = 100'

POTENTIAL MILLIVOLTS		RESISTIVITY OHMS M²/M	CONDUCTIVITY M MHOS/M
−→|10|←− +		0 Guard 50	500 Induction 0
Rmf 3.60 at 101 °F.		0 500	1000 500
		0 Amp. Guard 10	**RESISTIVITY OHMS M²/M**
		0 Induction 50	
		0 500	

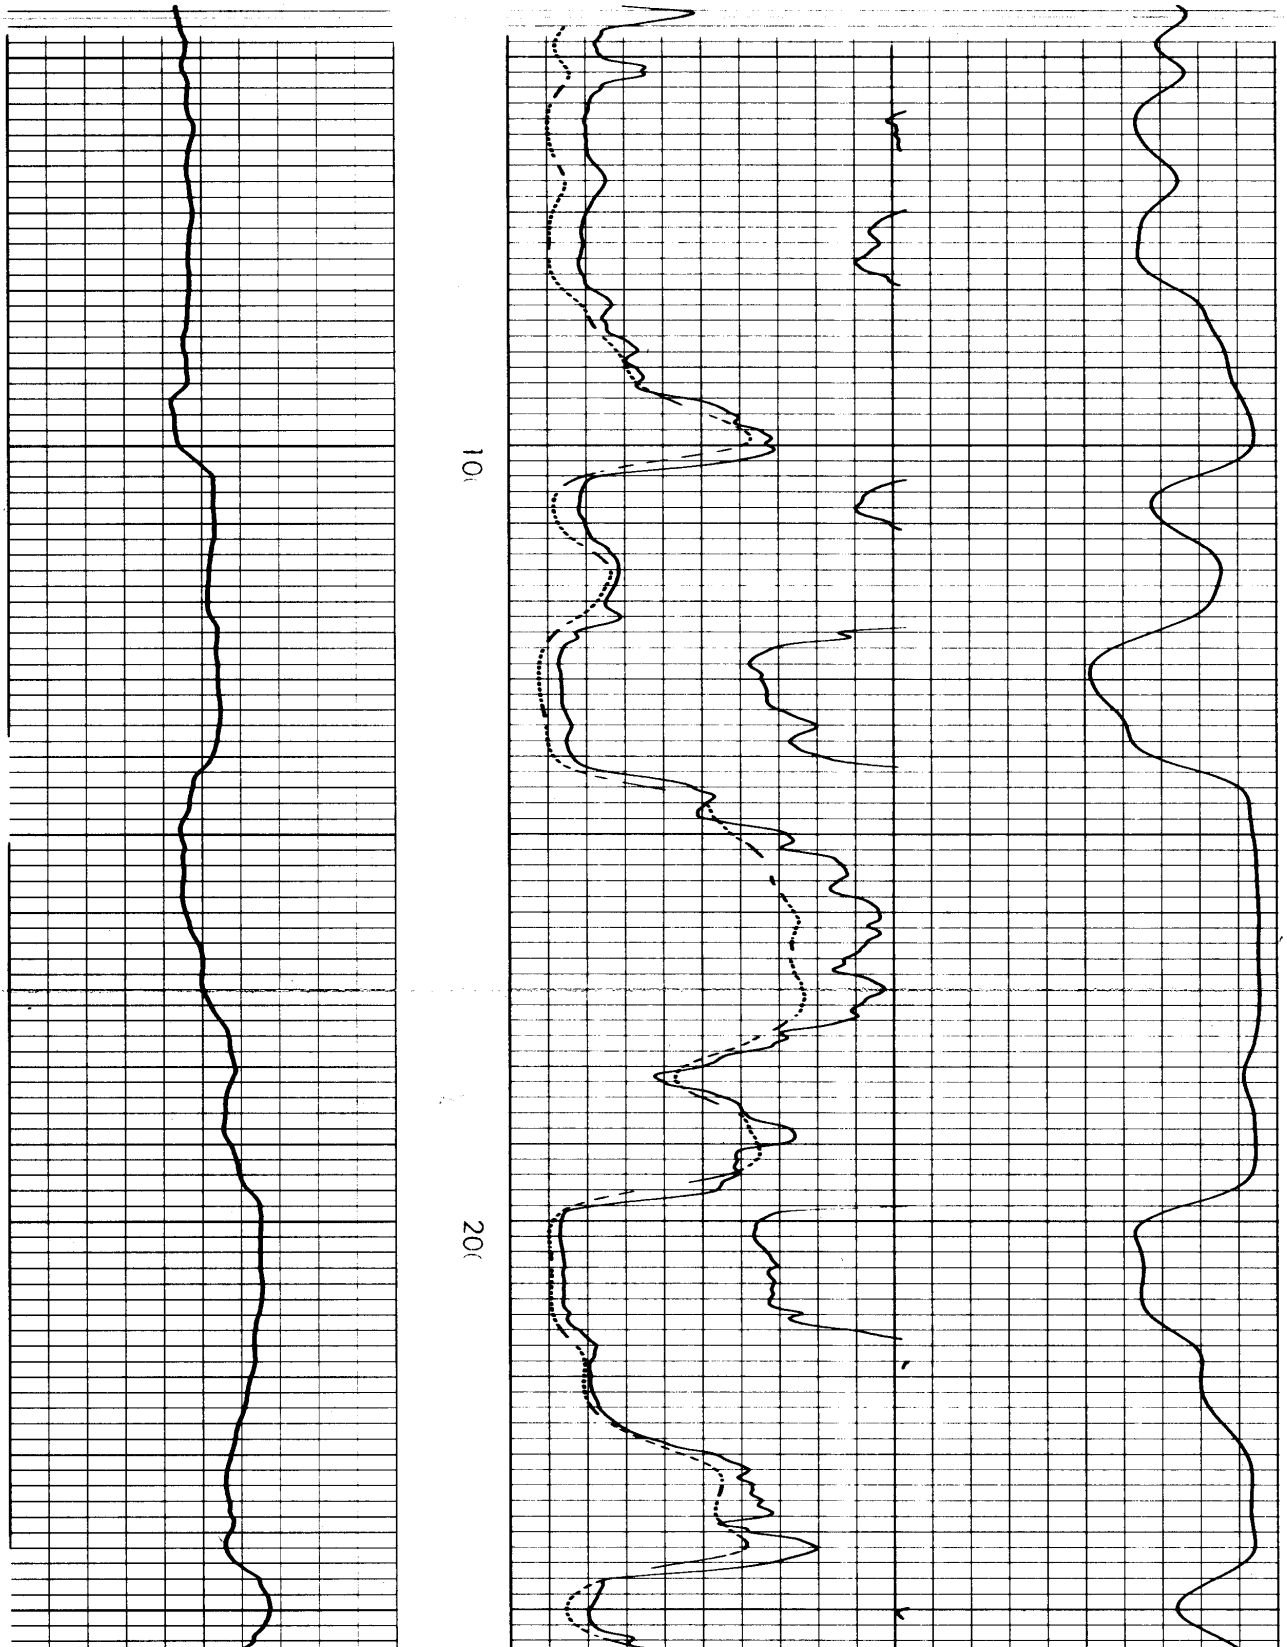

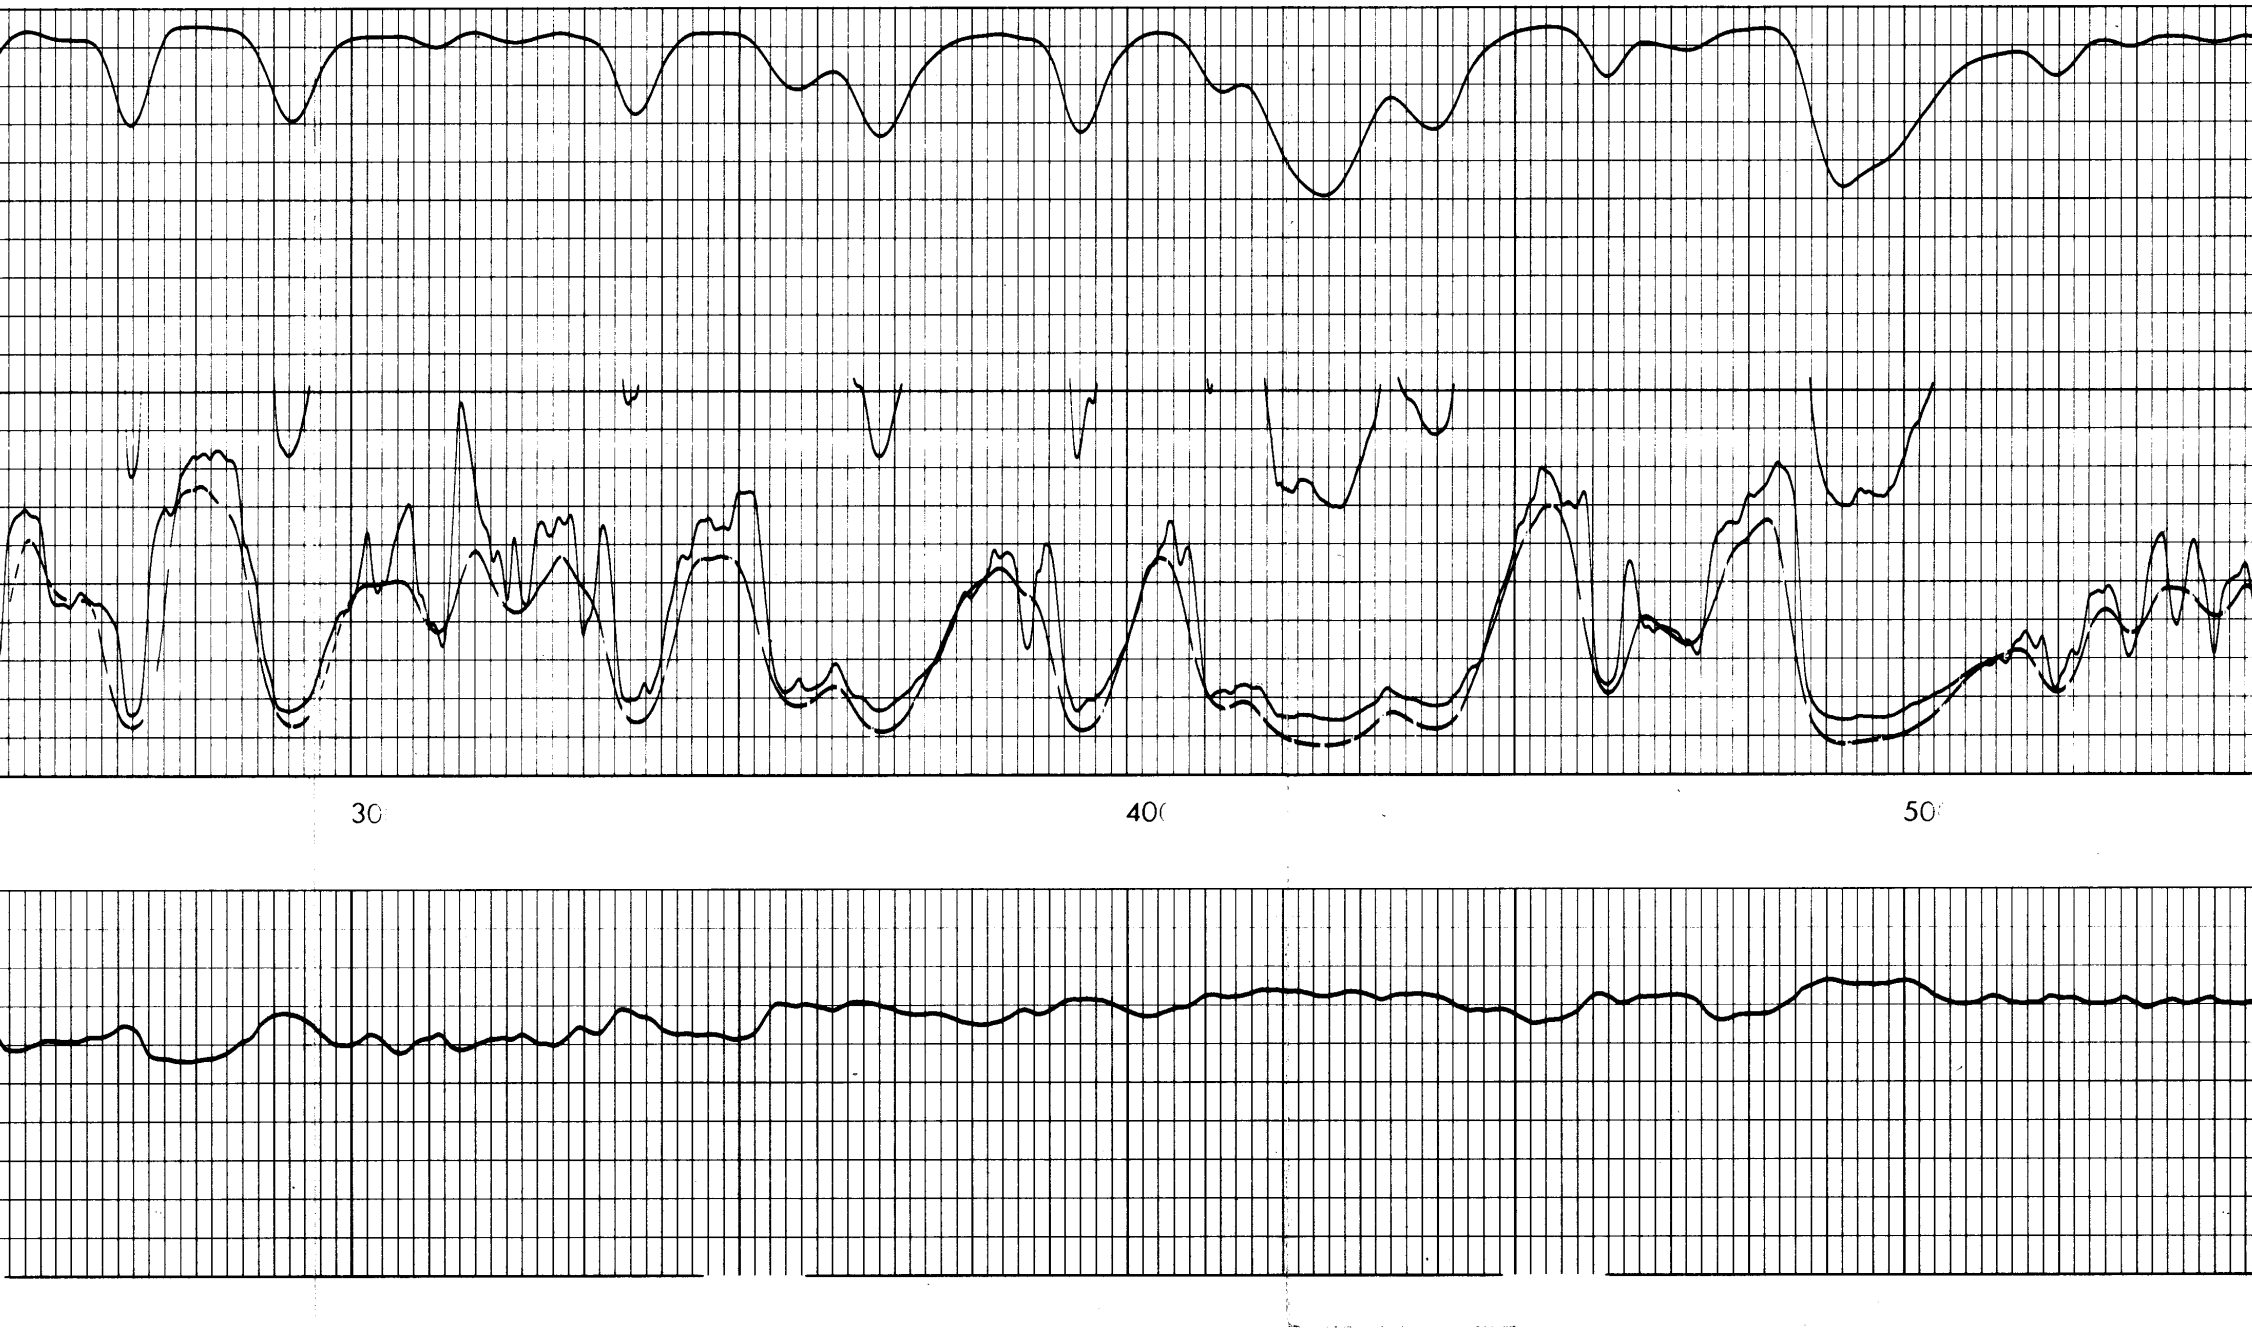

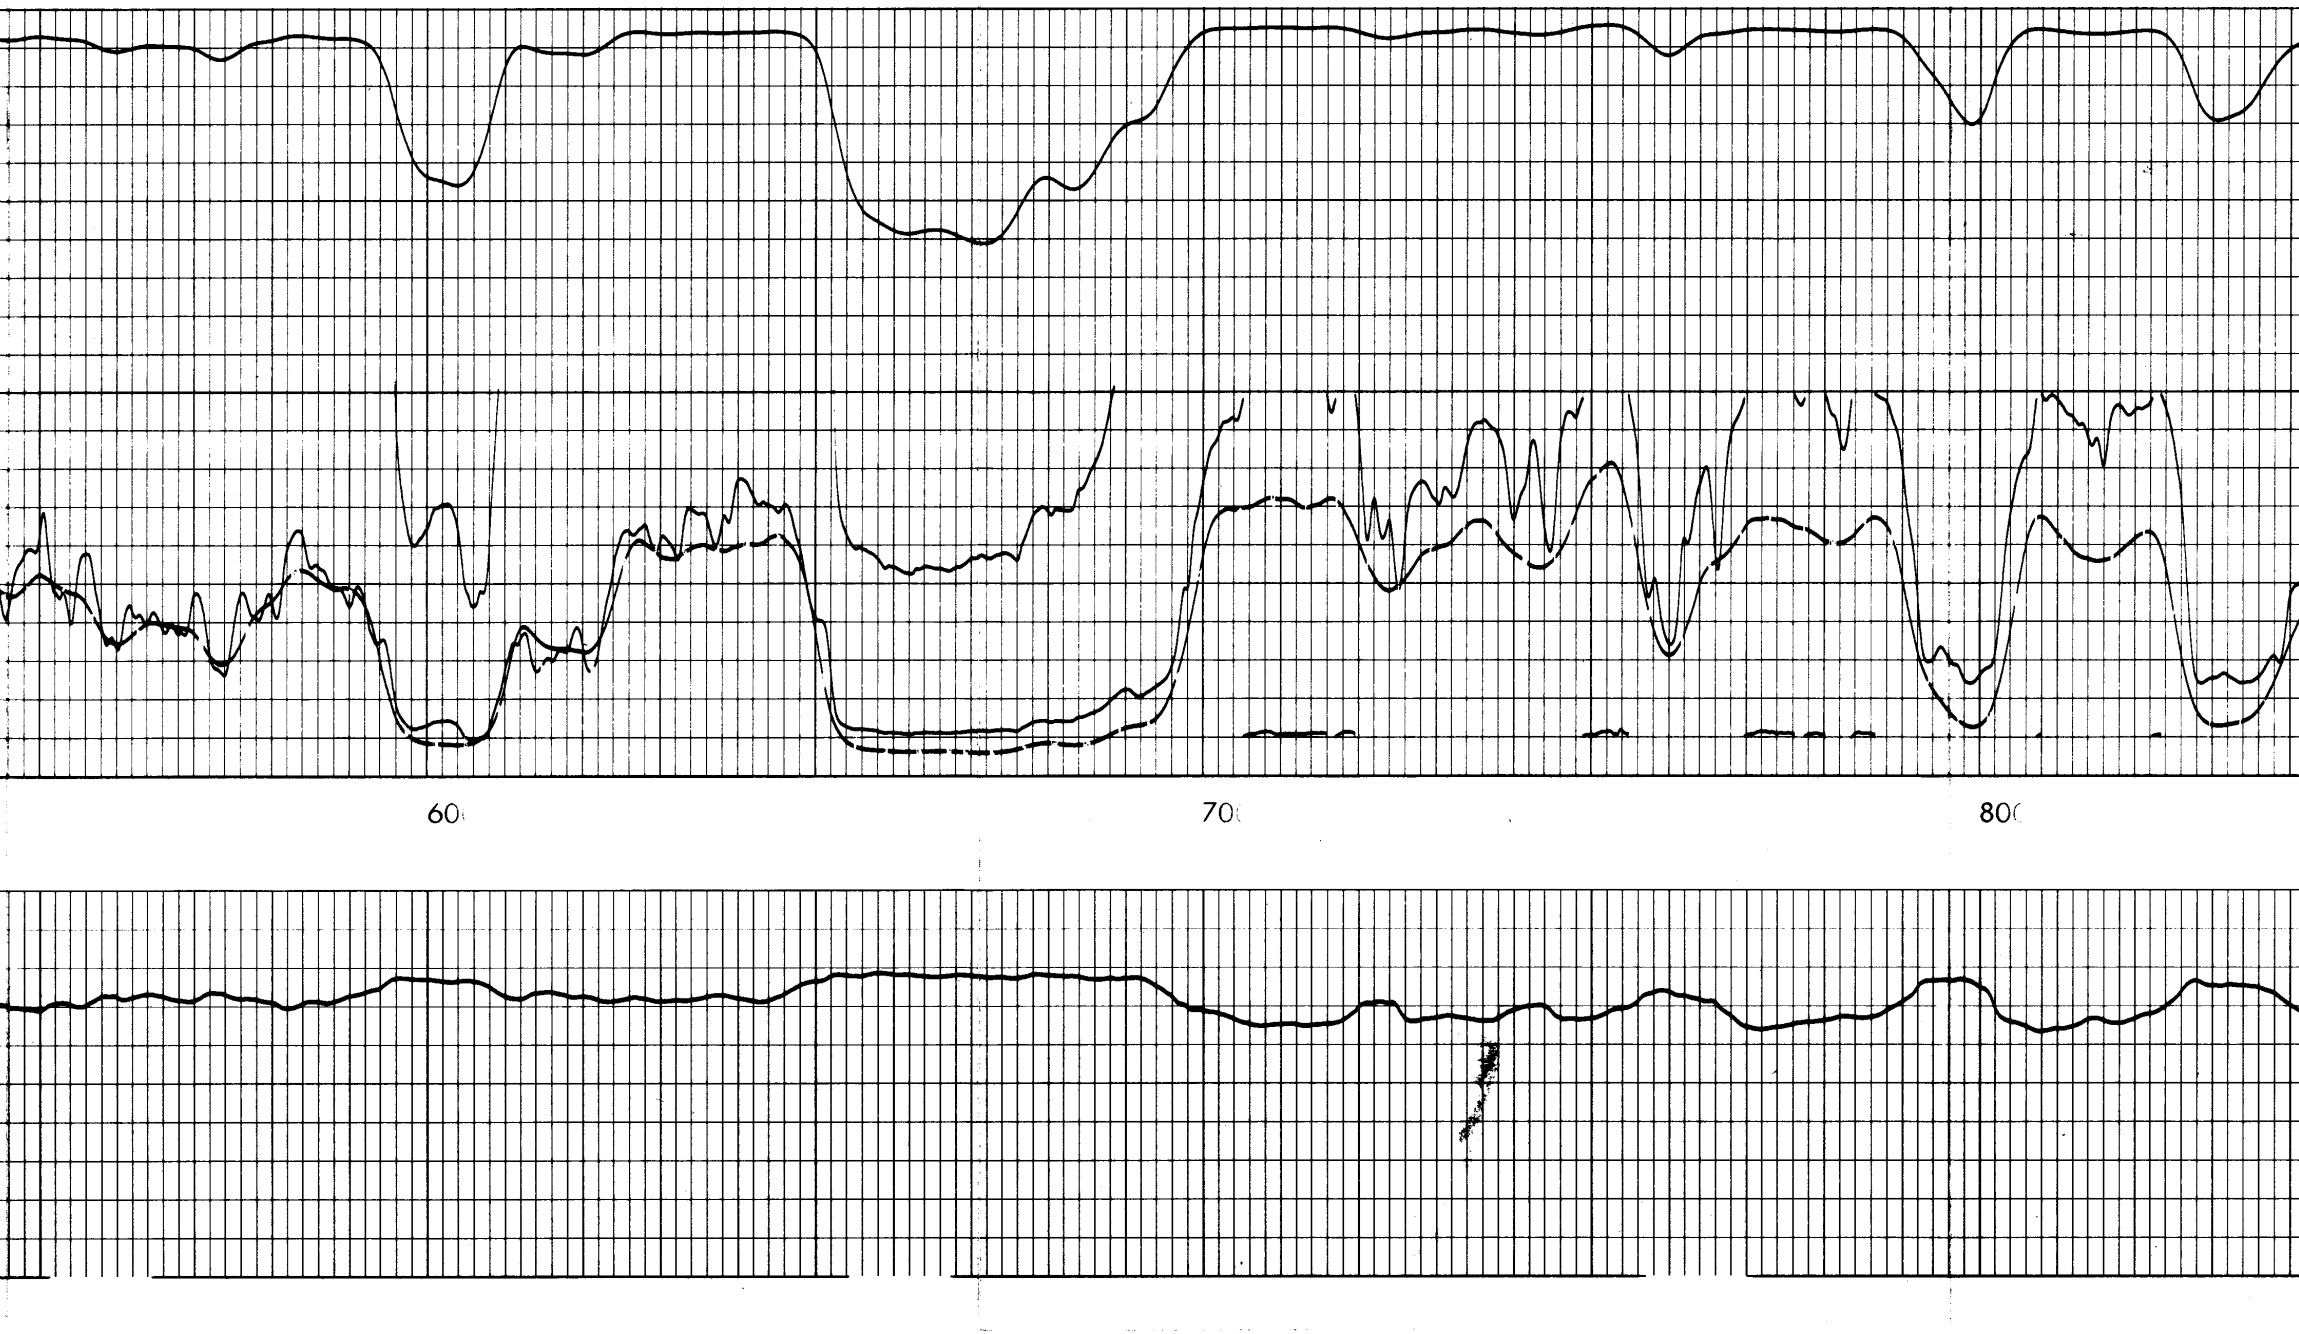

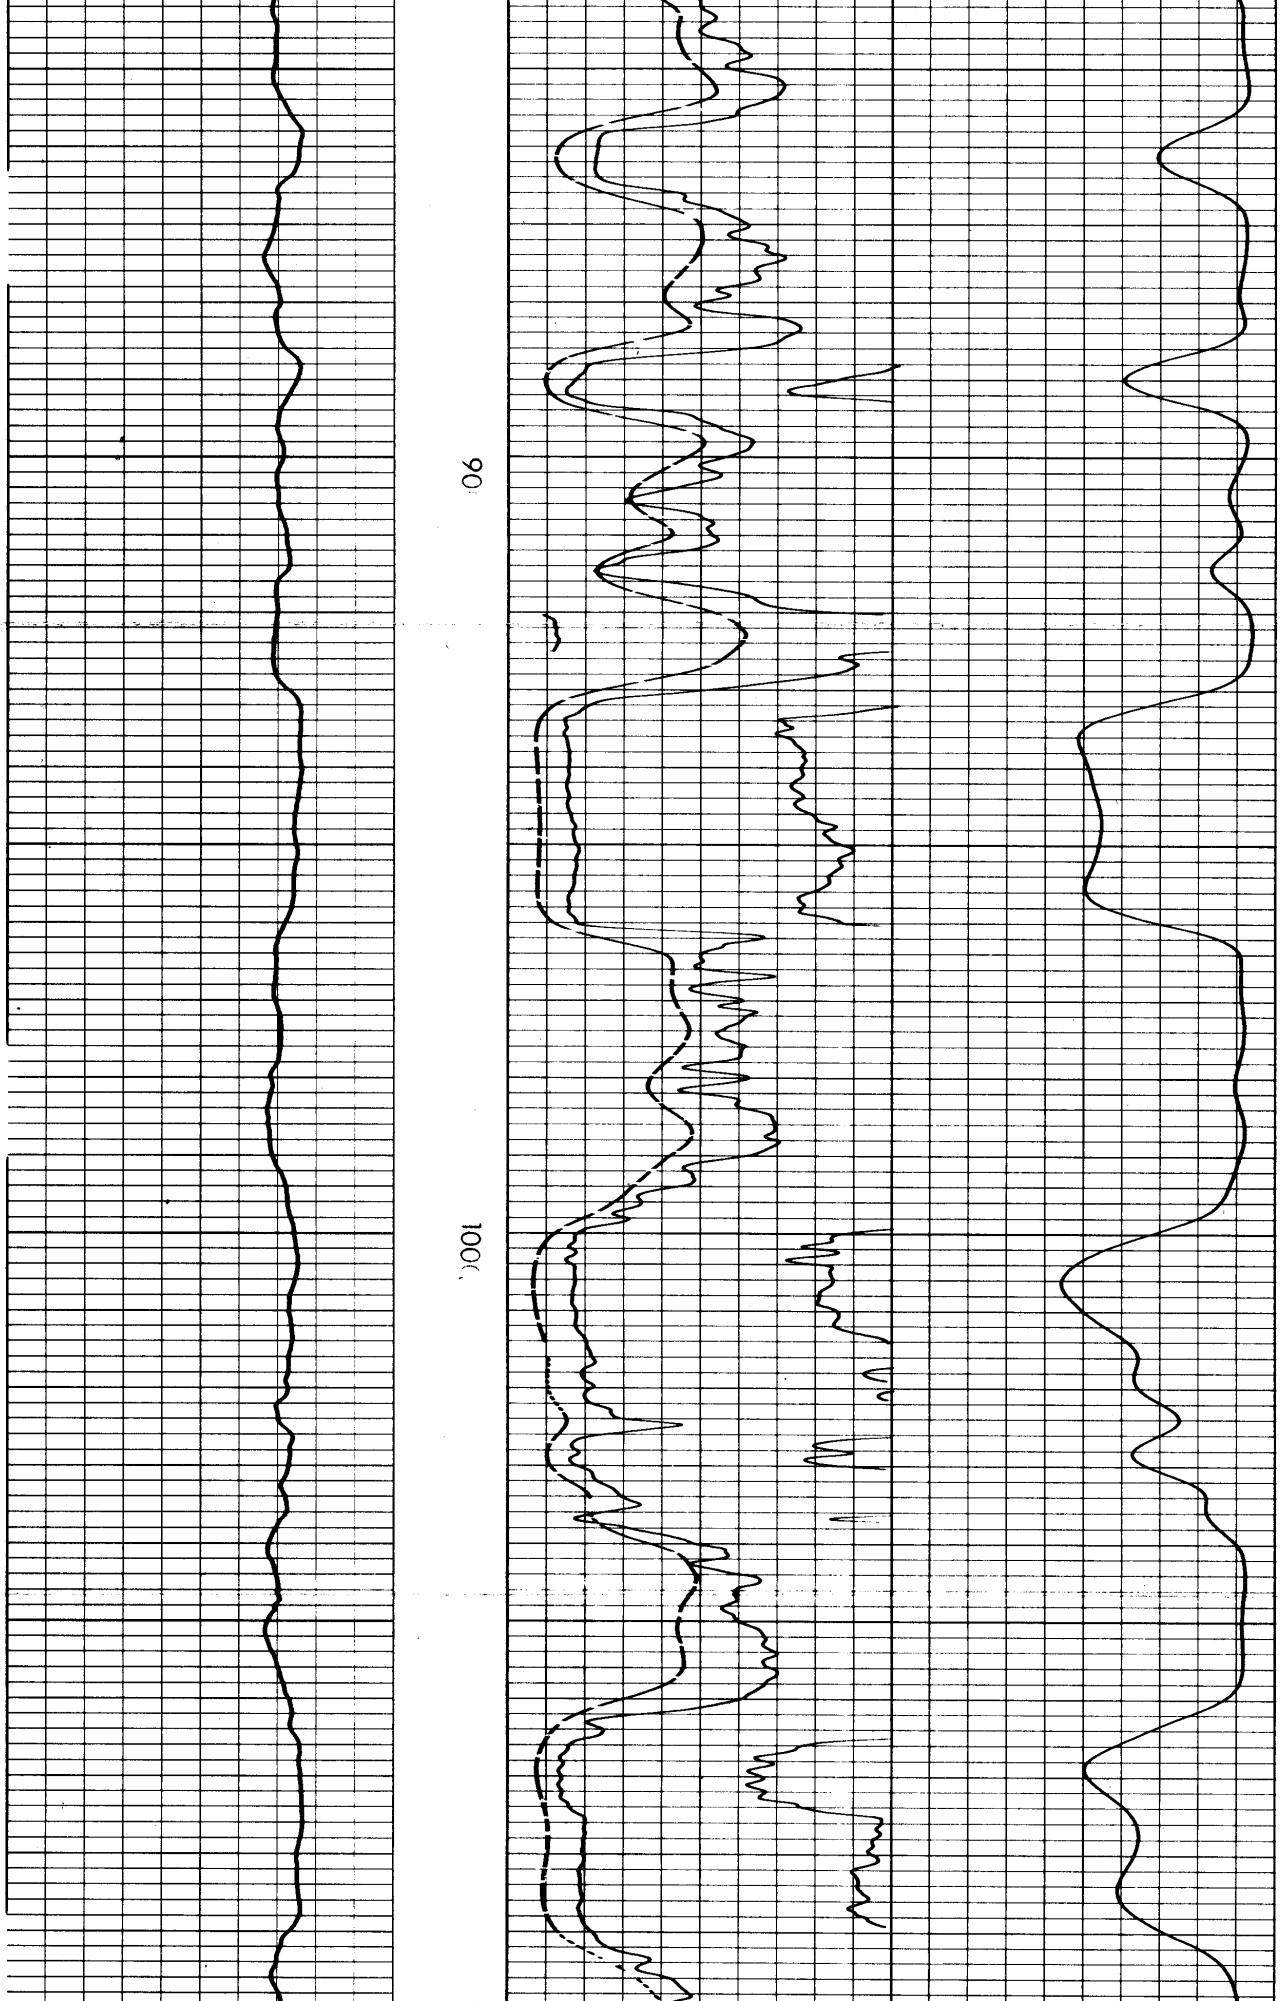

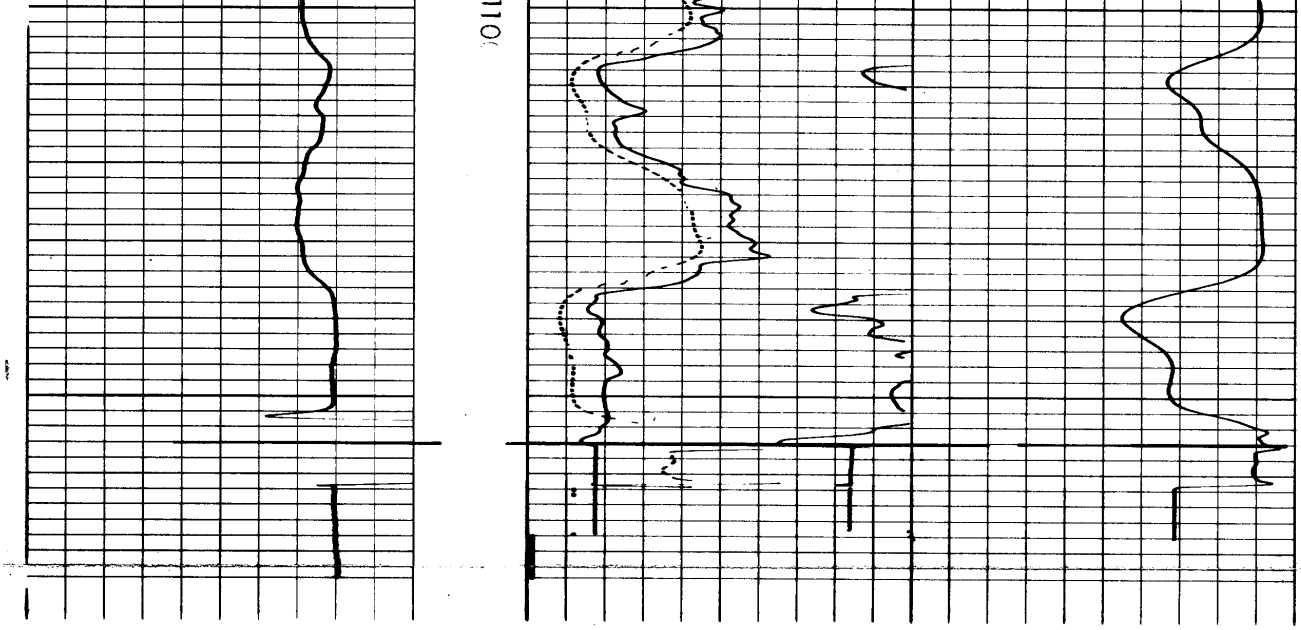

REPEAT SECTION

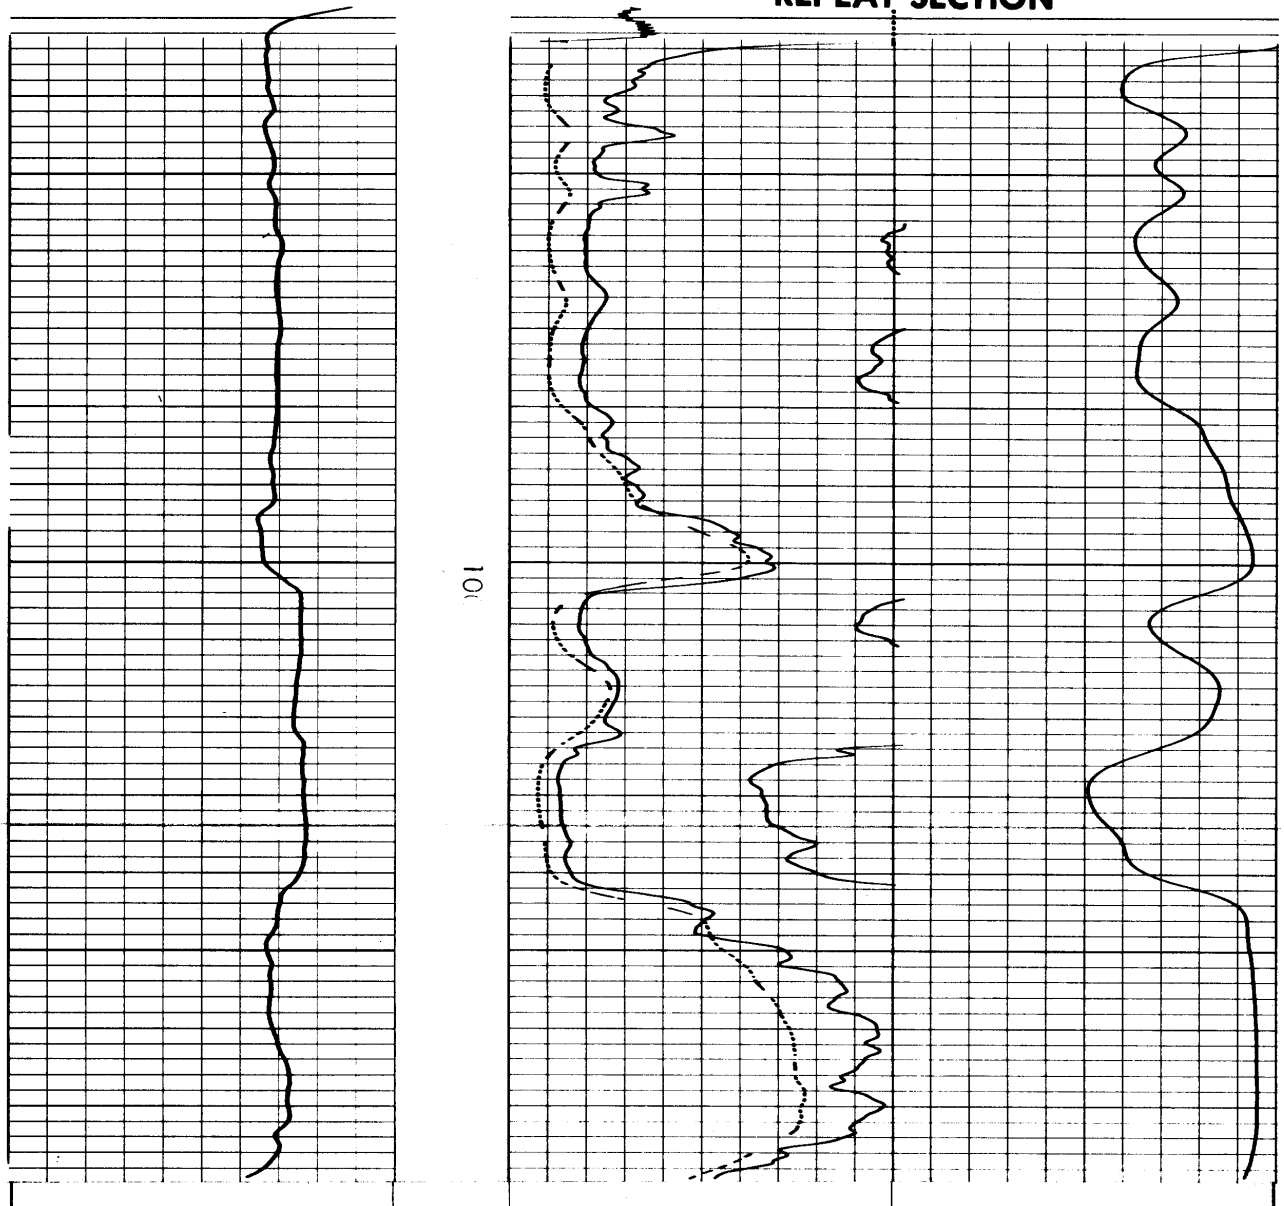

Rmf 3.60 at 101 °F.

— → 10 ← — +

POTENTIAL MILLIVOLTS

0 Induction 50

0 500

0 Guard 50

0 500

0 Amp. Guard 10

RESISTIVITY OHMS M²/M

RESISTIVITY OHMS M²/M

500 Induction 0

1000 500

CONDUCTIVITY M MHOS/M

ALSAY-PIPPIN CORP.
HORSEPEN BAYOU M.U.D. #1
WILDCAT
HARRIS COUNTY, TEXAS

T.D. LOGGED	1156'
T.D. DRILLER	1156'
T.D. WELEX	1158'

CALIBRATION AFTER SURVEY

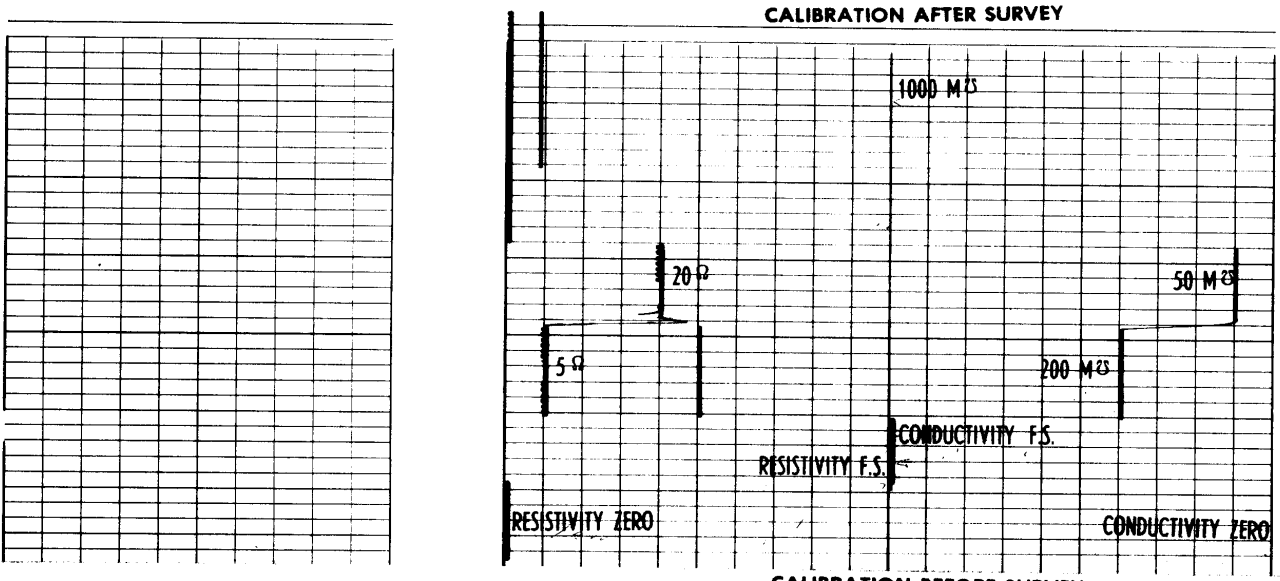

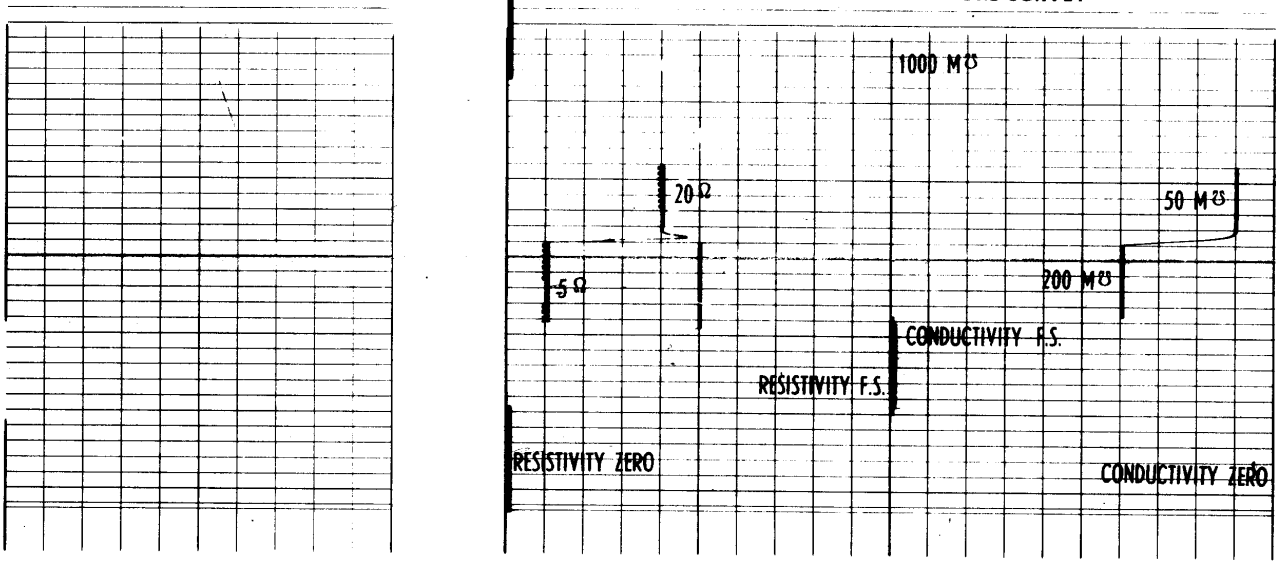CALIBRATION BEFORE SURVEY