**SCHLUMBERGER** ELECTRICAL LOG

COUNTY HARRIS
FIELD or LOCATION WATER WELL
WELL WILCRESE IMPROVEMENT DIST #1
COMPANY LAYNE-TEXAS CO.

COMPANY LAYNE-TEXAS COMPANY
65-20-216
WELL WILCREST IMPROVEMENT DISTRICT #1
FIELD WATER WELL
COUNTY HARRIS STATE TEXAS

LOCATION
Sec. ______ Twp. ______ Rge. ______

Other Services:
NONE

Permanent Datum: GROUND LEVEL, Elev. -
Log Measured From GROUND LEVEL Ft. Above Perm. Datum
Drilling Measured From GROUND LEVEL

Elev.: K.B. -
D.F. -
G.L. -

| | | | | |
|---|---|---|---|---|
| Date | 8-23-68 | | | |
| Run No. | ONE | | | |
| Depth—Driller | 1305 | | | |
| Depth—Logger | 1307 | | | |
| Btm. Log Interval | 1306 | | | |
| Top Log Interval | 80 | | | |
| Casing—Driller | 24" @ 39 | @ | @ | @ |
| Casing—Logger | - - | | | |
| Bit Size | 12-1/4" TO 784; 9-7/8" TO T.D. | | | |
| Type Fluid in Hole | NATURAL | | | |
| Dens. \| Visc. | 10.6 \| 36 | | | |
| pH \| Fluid Loss | - - \| - - ml | ml | ml | ml |
| Source of Sample | FLOW LINE | | | |
| $R_m$ @ Meas. Temp. | 12.3 @ 85 °F | @ °F | @ °F | @ °F |
| $R_{mf}$ @ Meas. Temp. | - - @ - - °F | @ °F | @ °F | @ °F |
| $R_{mc}$ @ Meas. Temp. | - - @ - - °F | @ °F | @ °F | @ °F |
| Source: $R_{mf}$ $R_{mc}$ | - - \| - - | | | |
| $R_m$ @ BHT | 10.1 @ 103 °F | @ °F | @ °F | @ °F |
| Time Since Circ. | 2 HRS. | | | |
| Max. Rec. Temp. | 103 °F | °F | °F | °F |
| Equip. \| Location | 4546 \| WHAR. | | | |
| Recorded By | TAYLOR | | | 6520-16 |
| Witnessed By | MR. WALL | | | |

FOLD HERE The well name, location and borehole reference data were furnished by the customer.

REMARKS

Changes in Mud Type or Additional Samples

| | | |
|---|---|---|
| Date \| Sample No. | | |
| Depth—Driller | | |
| Type Fluid in Hole | | |
| Dens. \| Visc. | | |
| ph \| Fluid Loss | ml | |
| Source of Sample | | |
| $R_m$ @ Meas. Temp. | @ °F | @ °F |
| $R_{mf}$ @ Meas. Temp. | @ °F | @ °F |
| $R_{mc}$ @ Meas. Temp. | @ °F | @ °F |
| Source: $R_{mf}$ \| $R_{mc}$ | | |
| $R_m$ @ BHT | @ °F | @ °F |
| $R_{mf}$ @ BHT | @ °F | @ °F |
| $R_{mc}$ @ BHT | @ °F | @ °F |

Scale Changes

| Type Log | Depth | Scale Up Hole | Scale Down Hole |
|---|---|---|---|
| | | | |

Equipment Data

| Run No. | Tool Type | Pad Type | Tool Pos. | Other |
|---|---|---|---|---|
| | | | | |

8-29-68 [illegible]0077126

| SPONTANEOUS POTENTIAL millivolts | Depths | RESISTIVITY ohms. m²/m | RESISTIVITY ohms. m²/m |
|---|---|---|---|
| − ⟷10 + | 2"=100' | SHORT NORMAL<br>A-16"-M-18'8"-N-∞-B<br>0 — 50<br>0 — 500<br>LONG NORMAL<br>A-64"-M-65'6"-N-∞-B<br>0 - - - 50<br>0 - - - 500<br>AMP SHORT NORMAL<br>0 — 10 | 18'8" LATERAL<br>A-32"-B-17'4"-N-50'10"-M<br>0 — 500 |

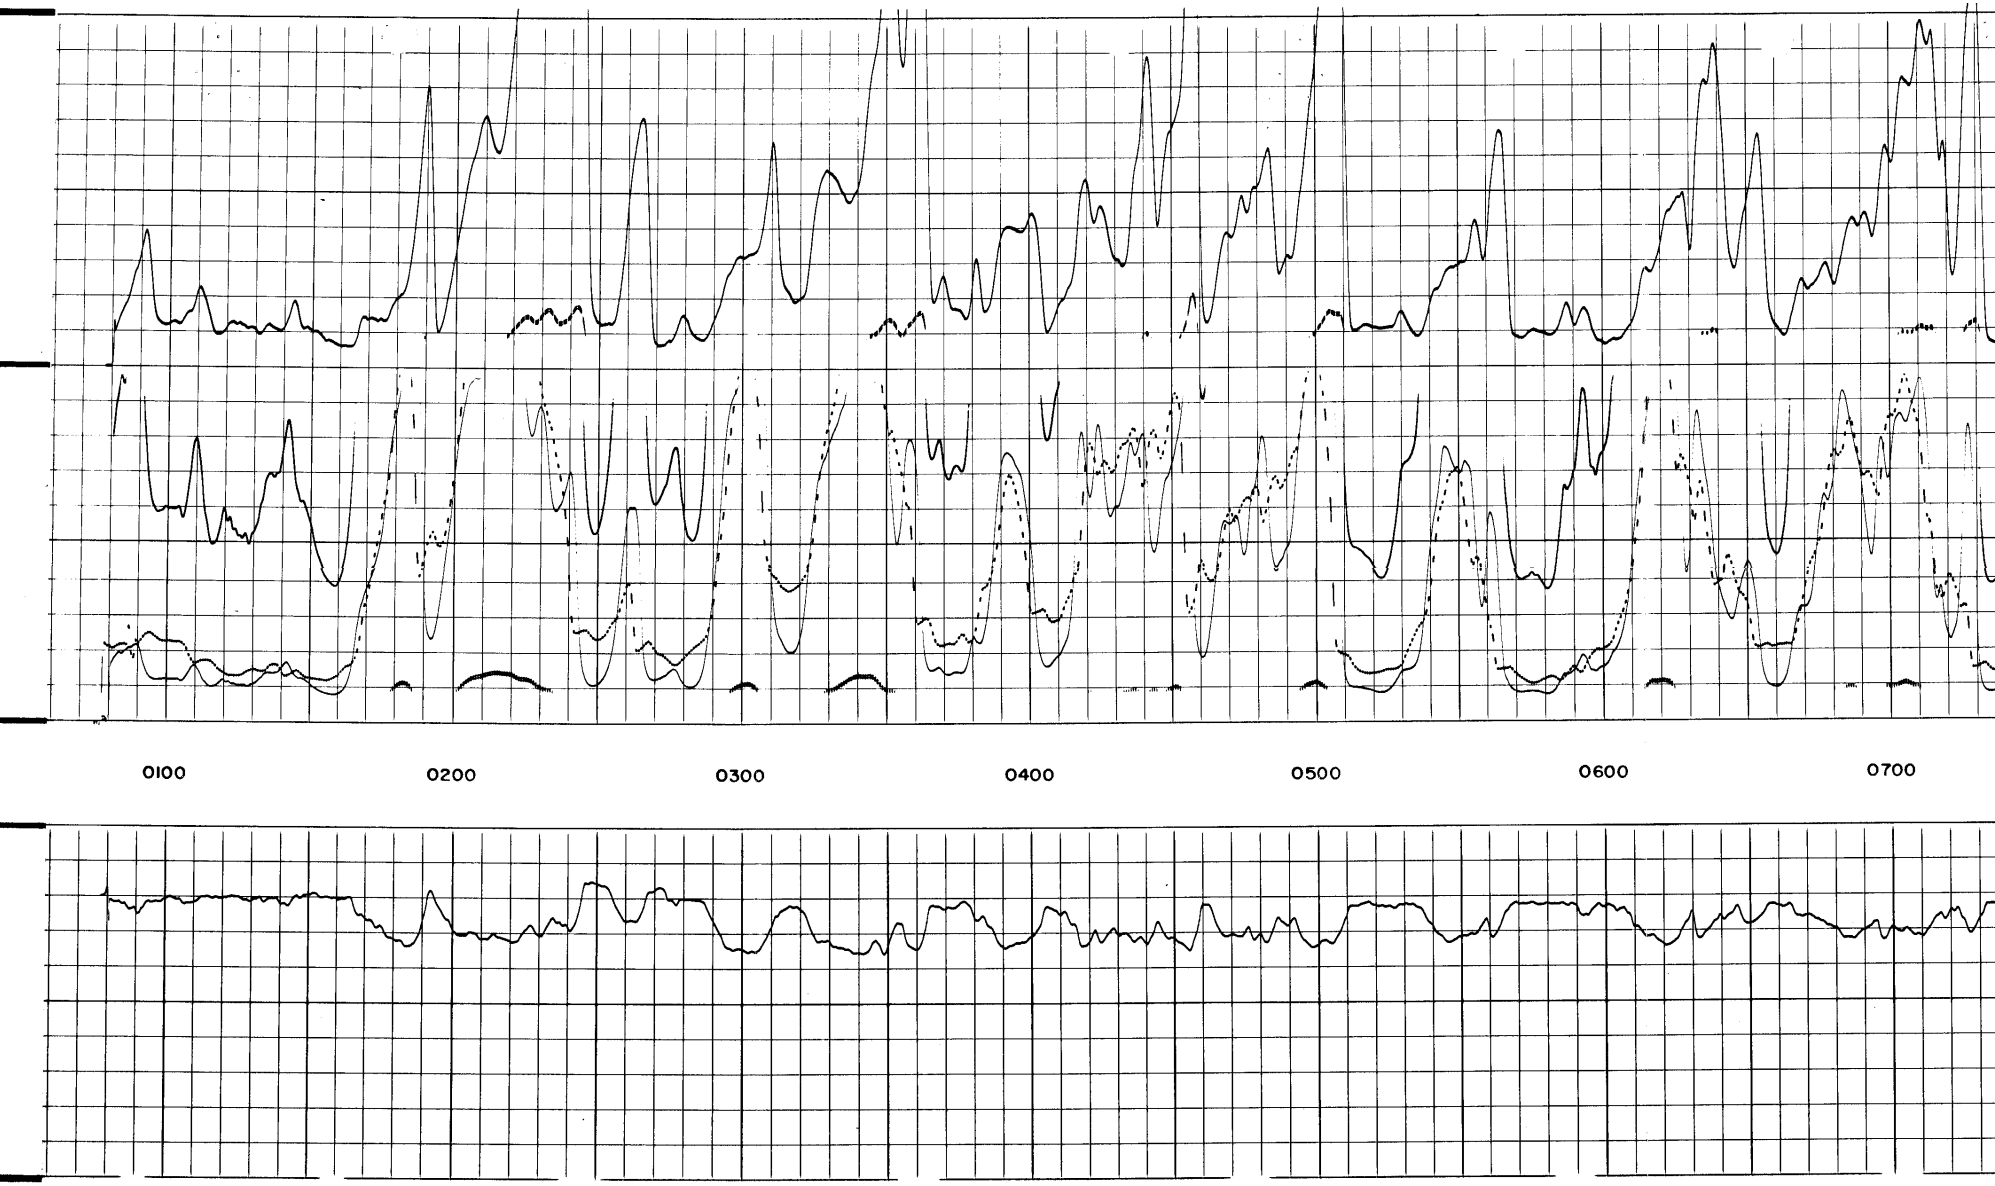

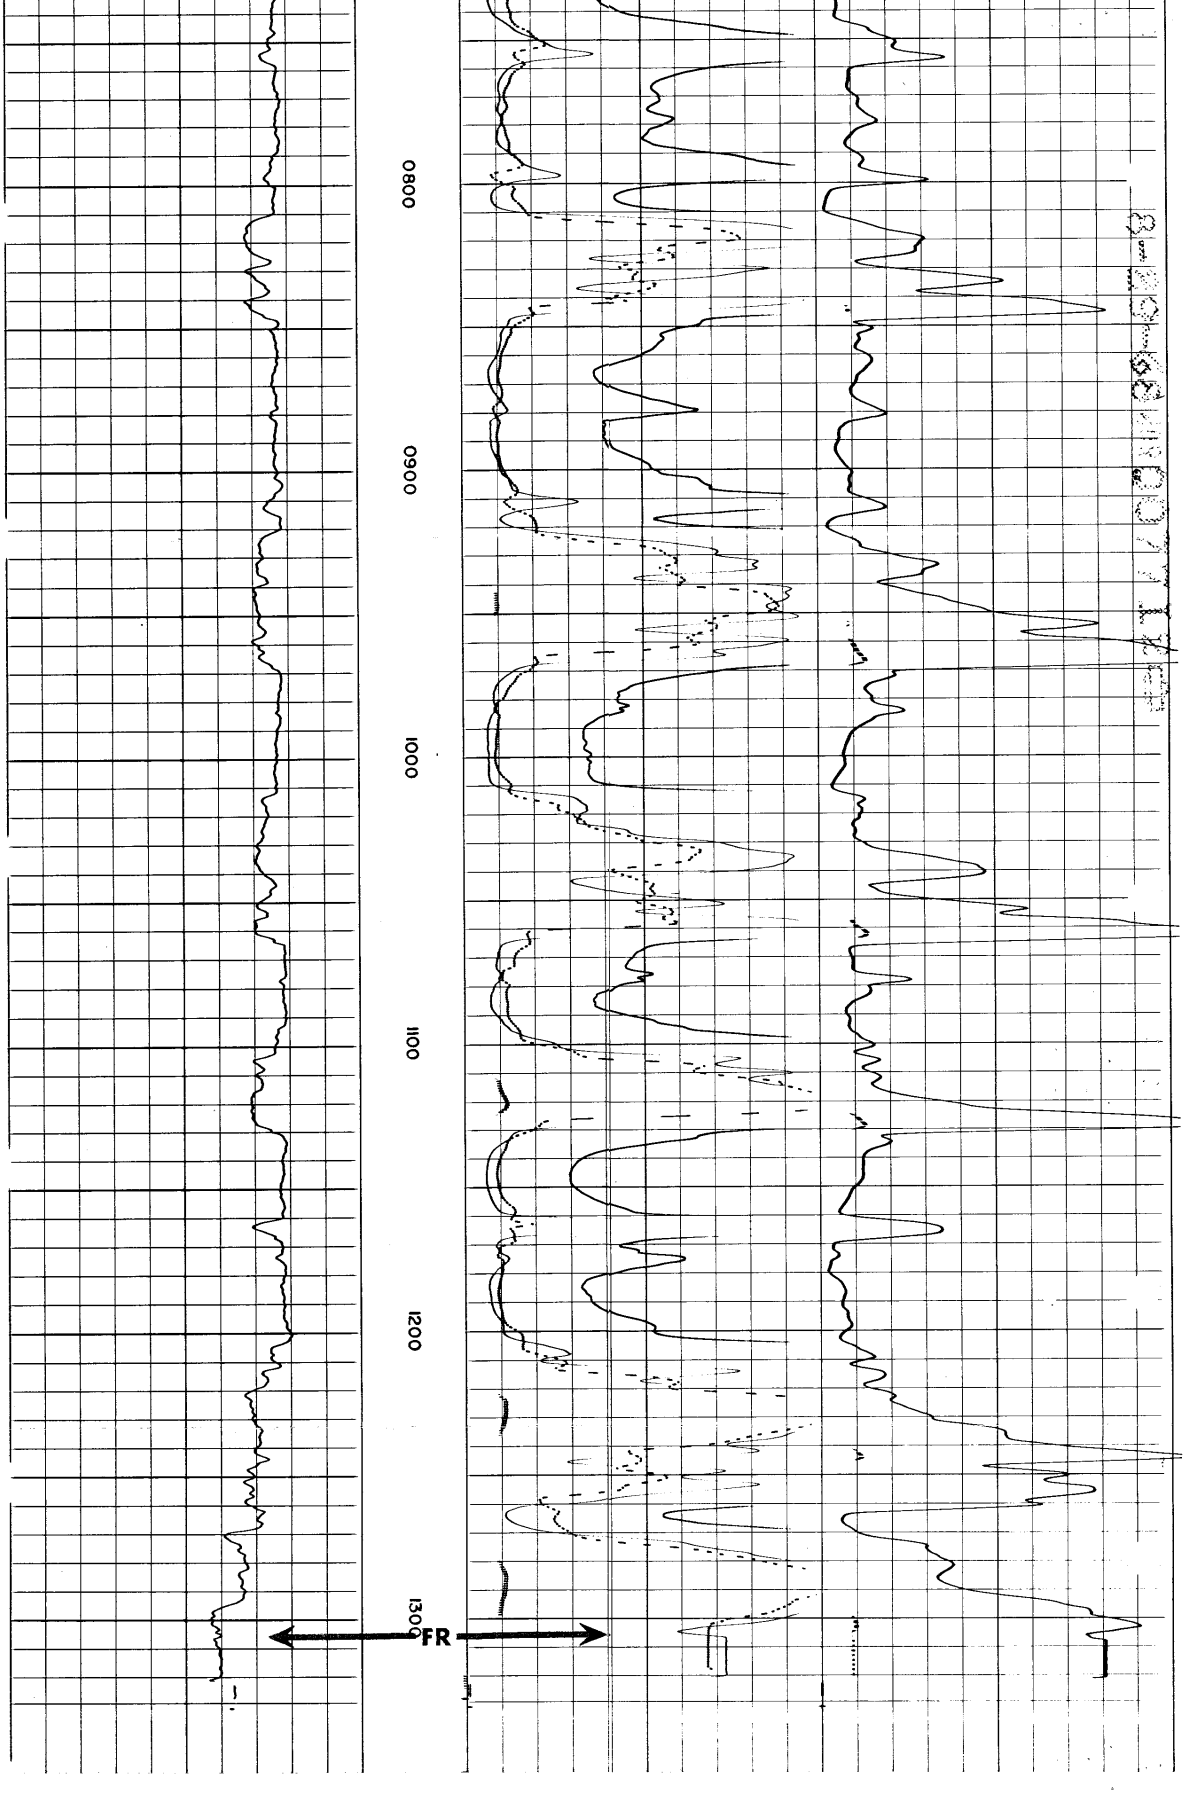

|  |  |  |  |
|---|---|---|---|
| – \|10\| + |  | SHORT NORMAL<br>A-1'6"-M-18'8"-N-∞-B<br>0 50<br>0 500<br>LONG NORMAL<br>A-6'4"-M-65'6"-N-∞-B<br>0 50<br>0 500<br>AMP SHORT NORMAL<br>0 10 | 18'8" LATERAL<br>A-32"-B-17'4"-N-50'10"-M<br>0 50<br>0 500 |
| SPONTANEOUS POTENTIAL<br>millivolts | Depths | RESISTIVITY<br>ohms. m²/m | RESISTIVITY<br>ohms. m²/m |

COMPANY LAYNE-TEXAS COMPANY
WELL WILCREST IMPROVEMENT DISTRICT #1
FIELD WATER WELL
COUNTY HARRIS STATE TEXAS

Rm 12.3 @ 85 °F
Rmf - @ - °F
Rmc - @ - °F
BHT 103 °F

SCHL. FR 1306'
SCHL. TD 1307'
DRLR TD 1305
Elev:
KB -
DF -
GL -

## DETAIL LOG

5" =100'

| SPONTANEOUS POTENTIAL millivolts | Depths | RESISTIVITY ohms. m²/m | RESISTIVITY ohms. m²/m |
|---|---|---|---|
| – 10 + | | SHORT NORMAL<br>A-1'6"-M-18'8"-N-∞-B<br>0 50<br>0 500<br>LONG NORMAL<br>A-64"-M-65'6"-N-∞-B<br>0 50<br>0 500<br>AMP SHORT NORMAL<br>0 10 | 18'8" LATERAL<br>A-32"-B-17'4"-N-50'10"-M<br>0 50<br>0 500 |

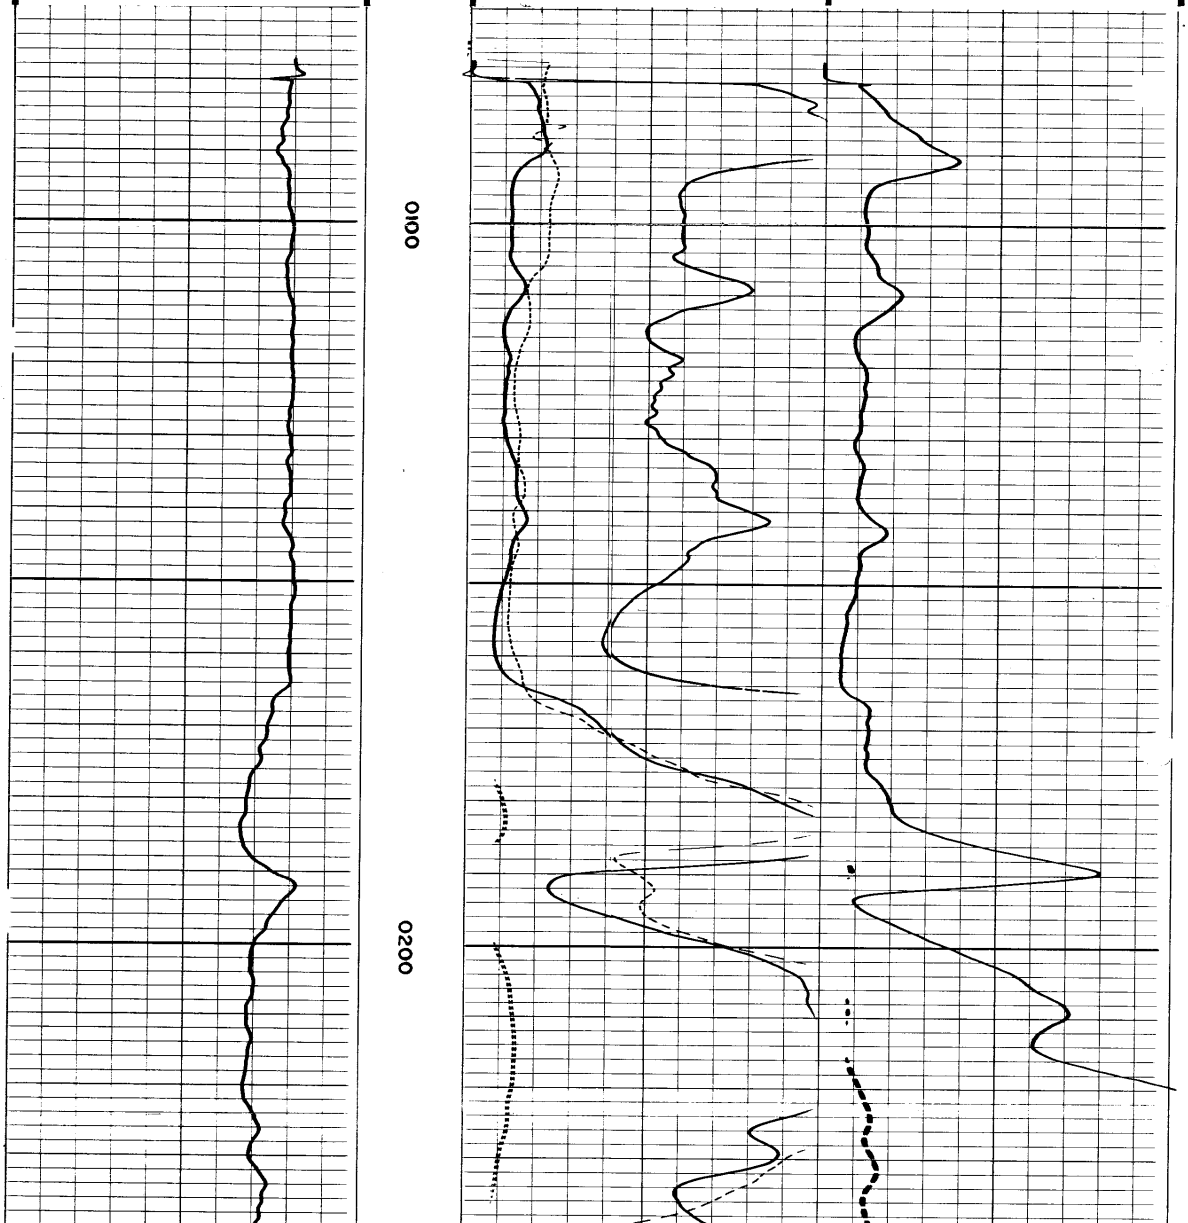

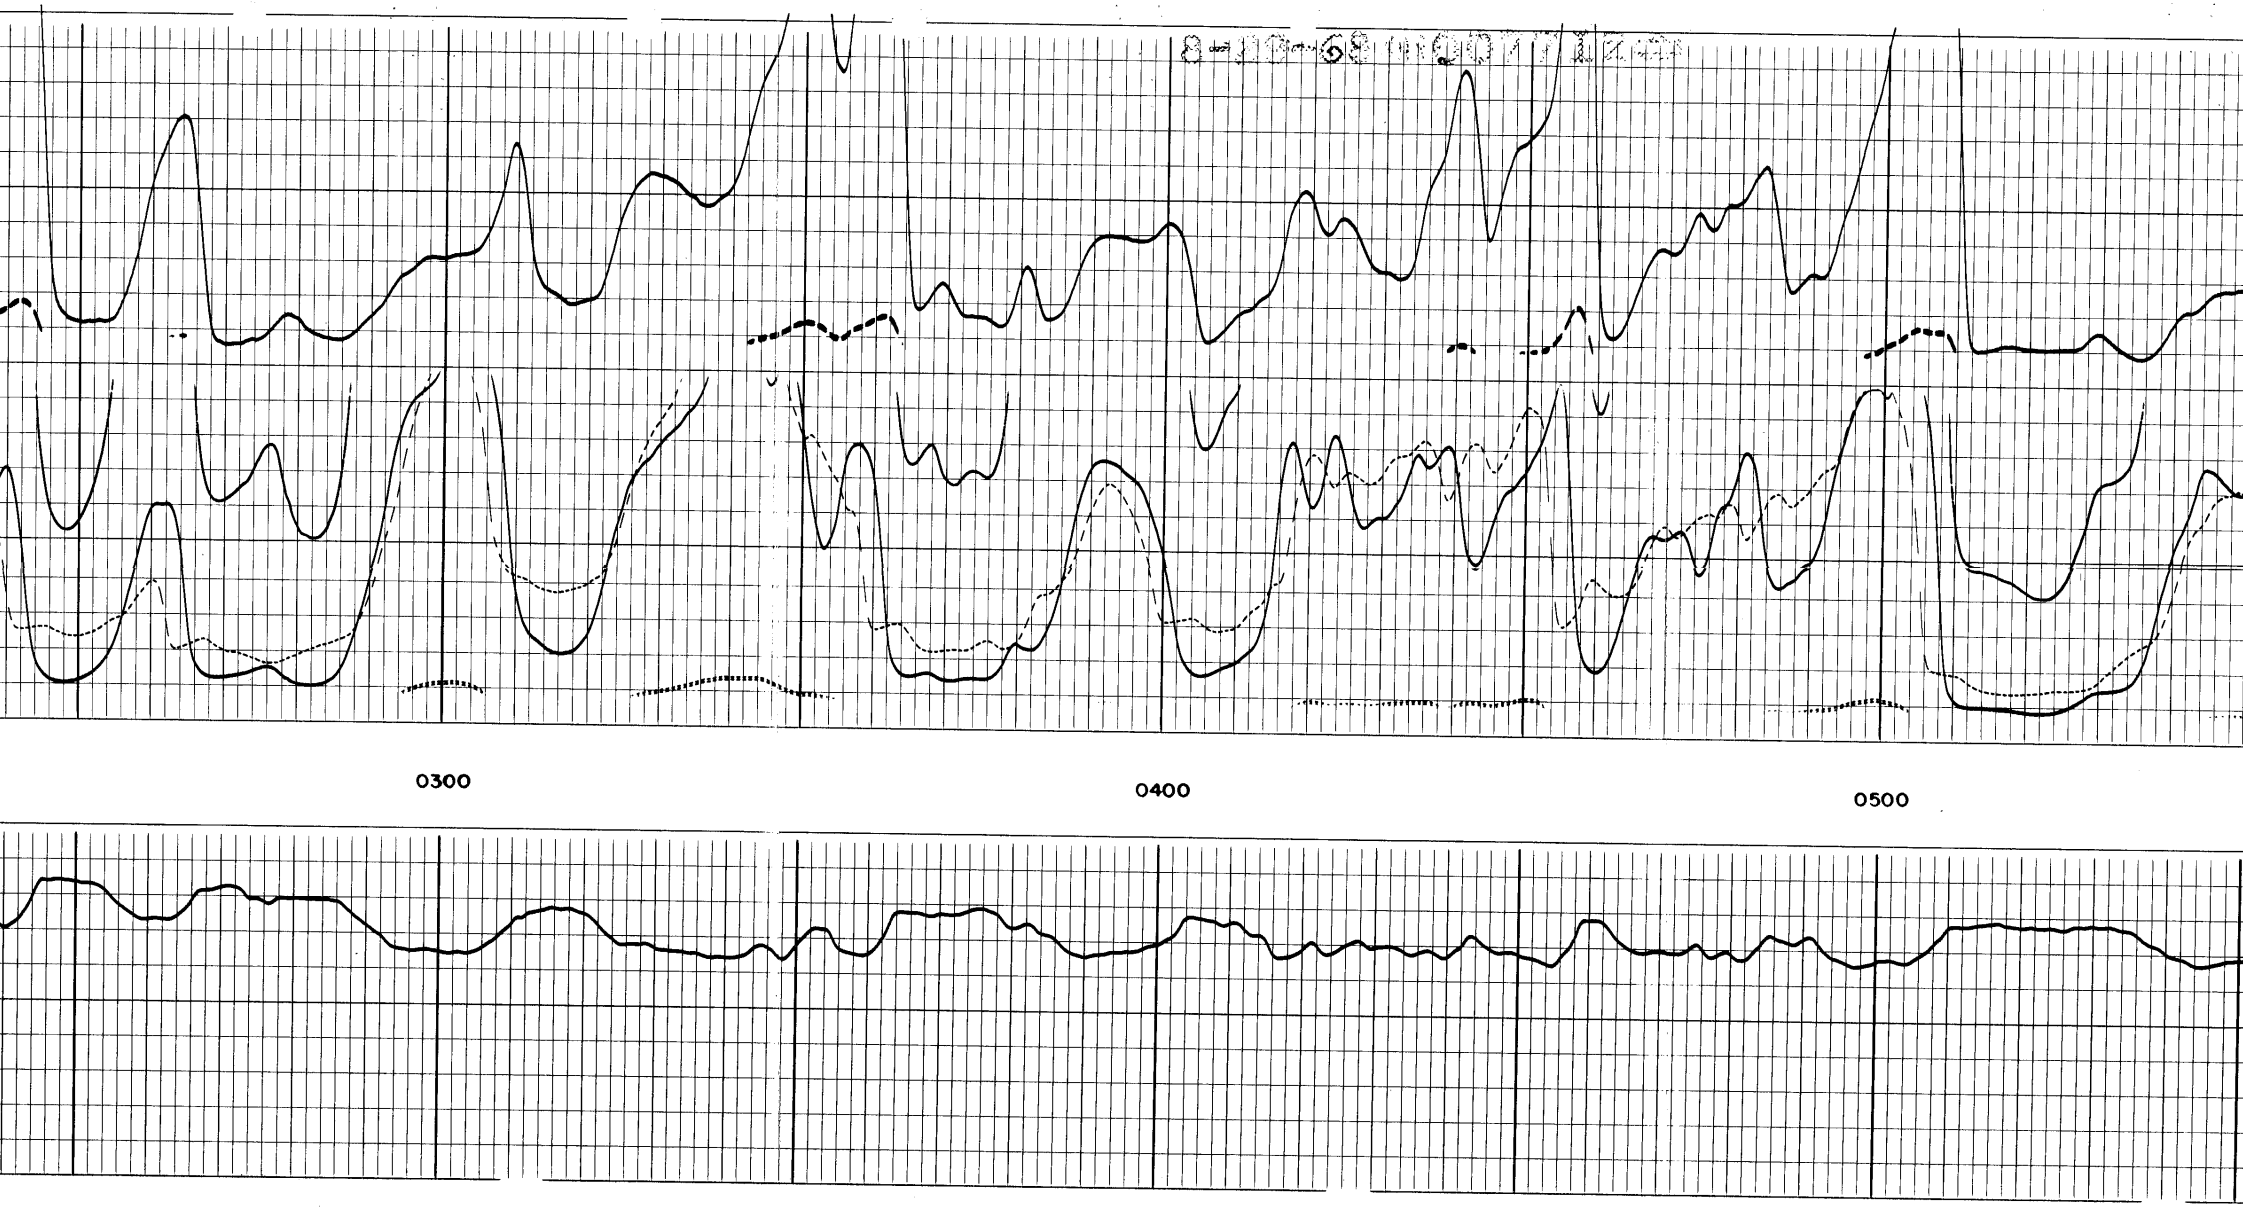

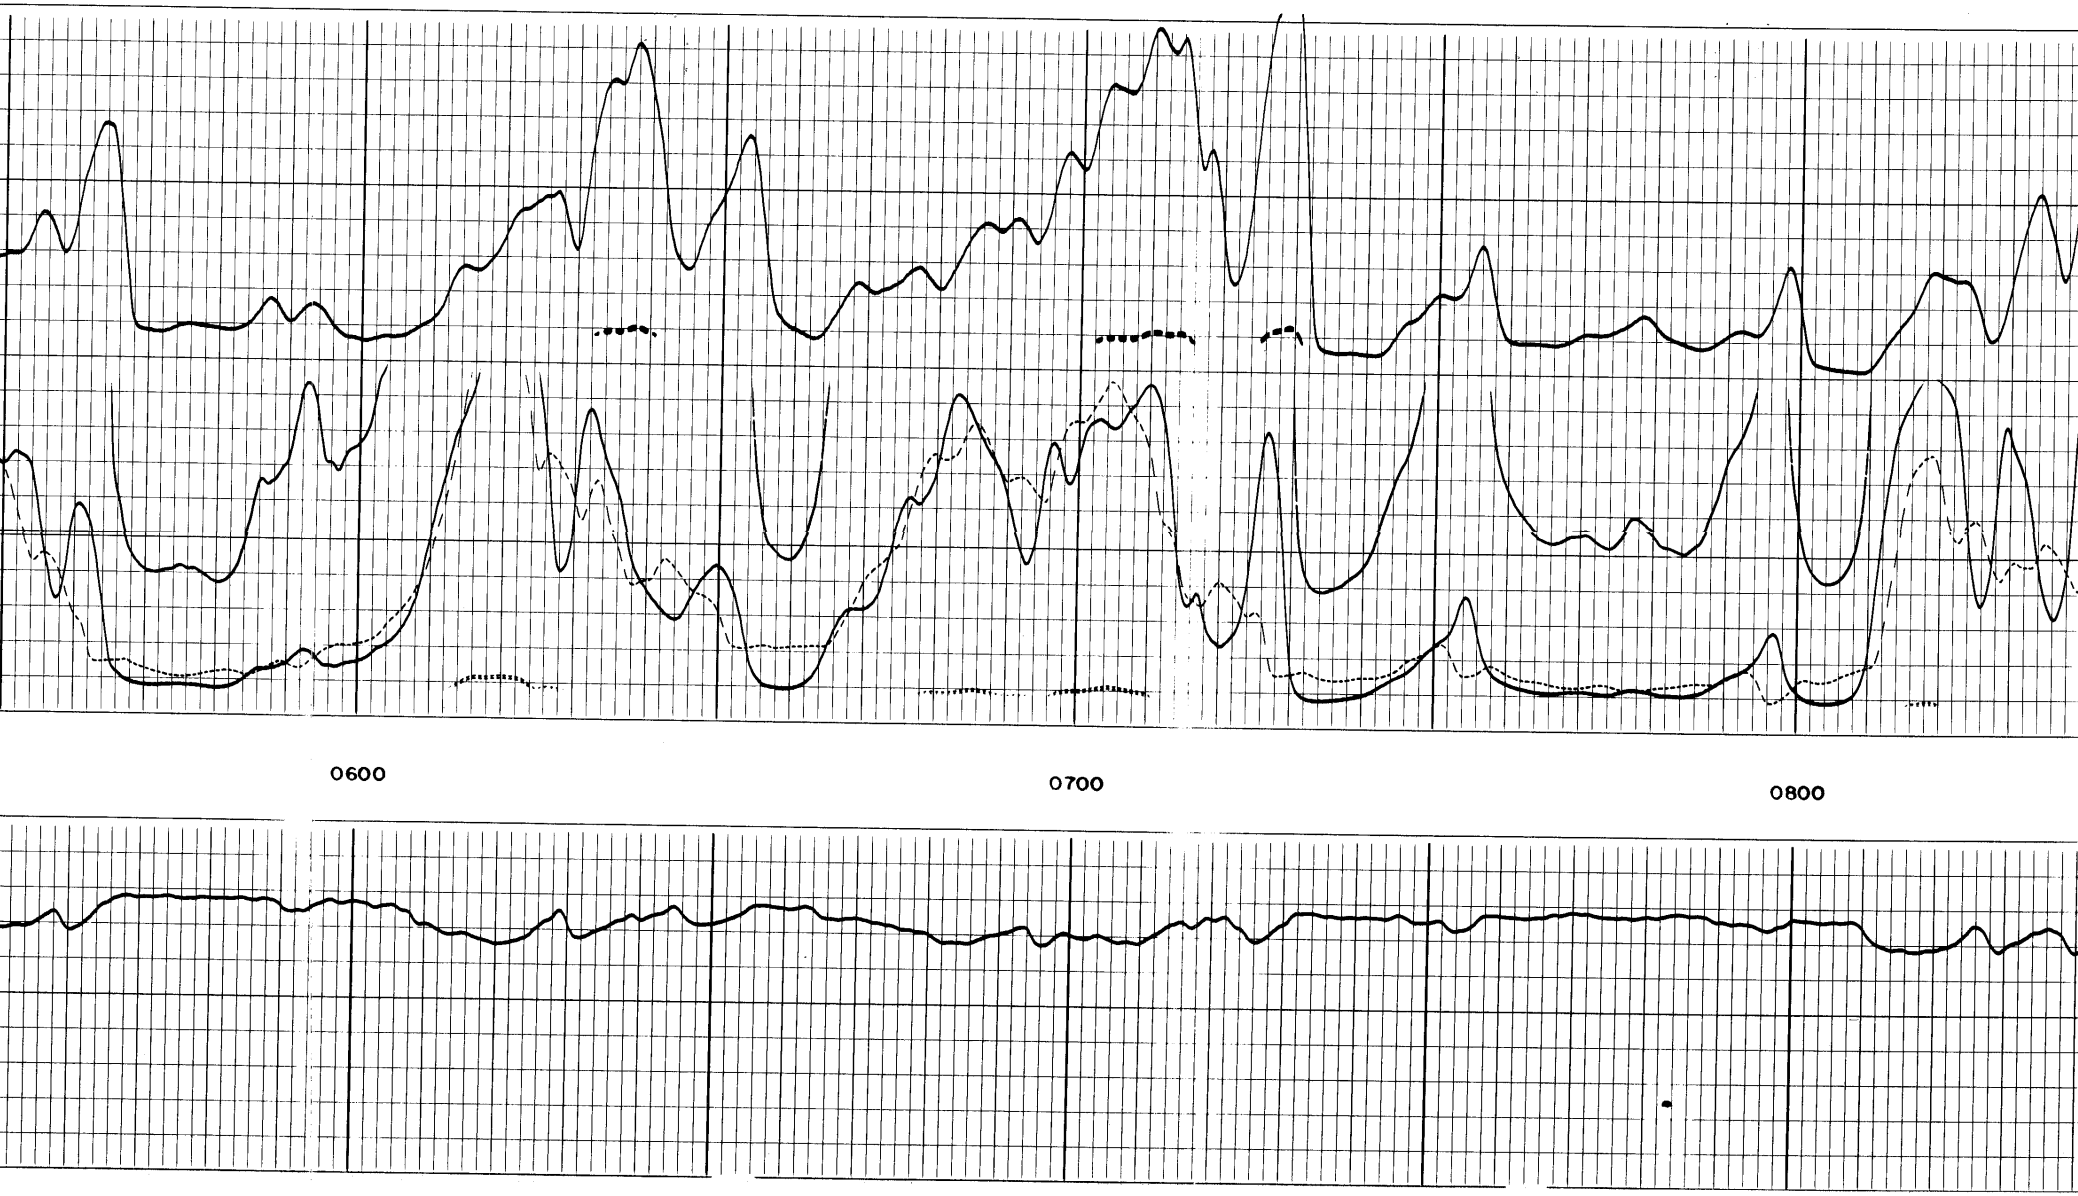

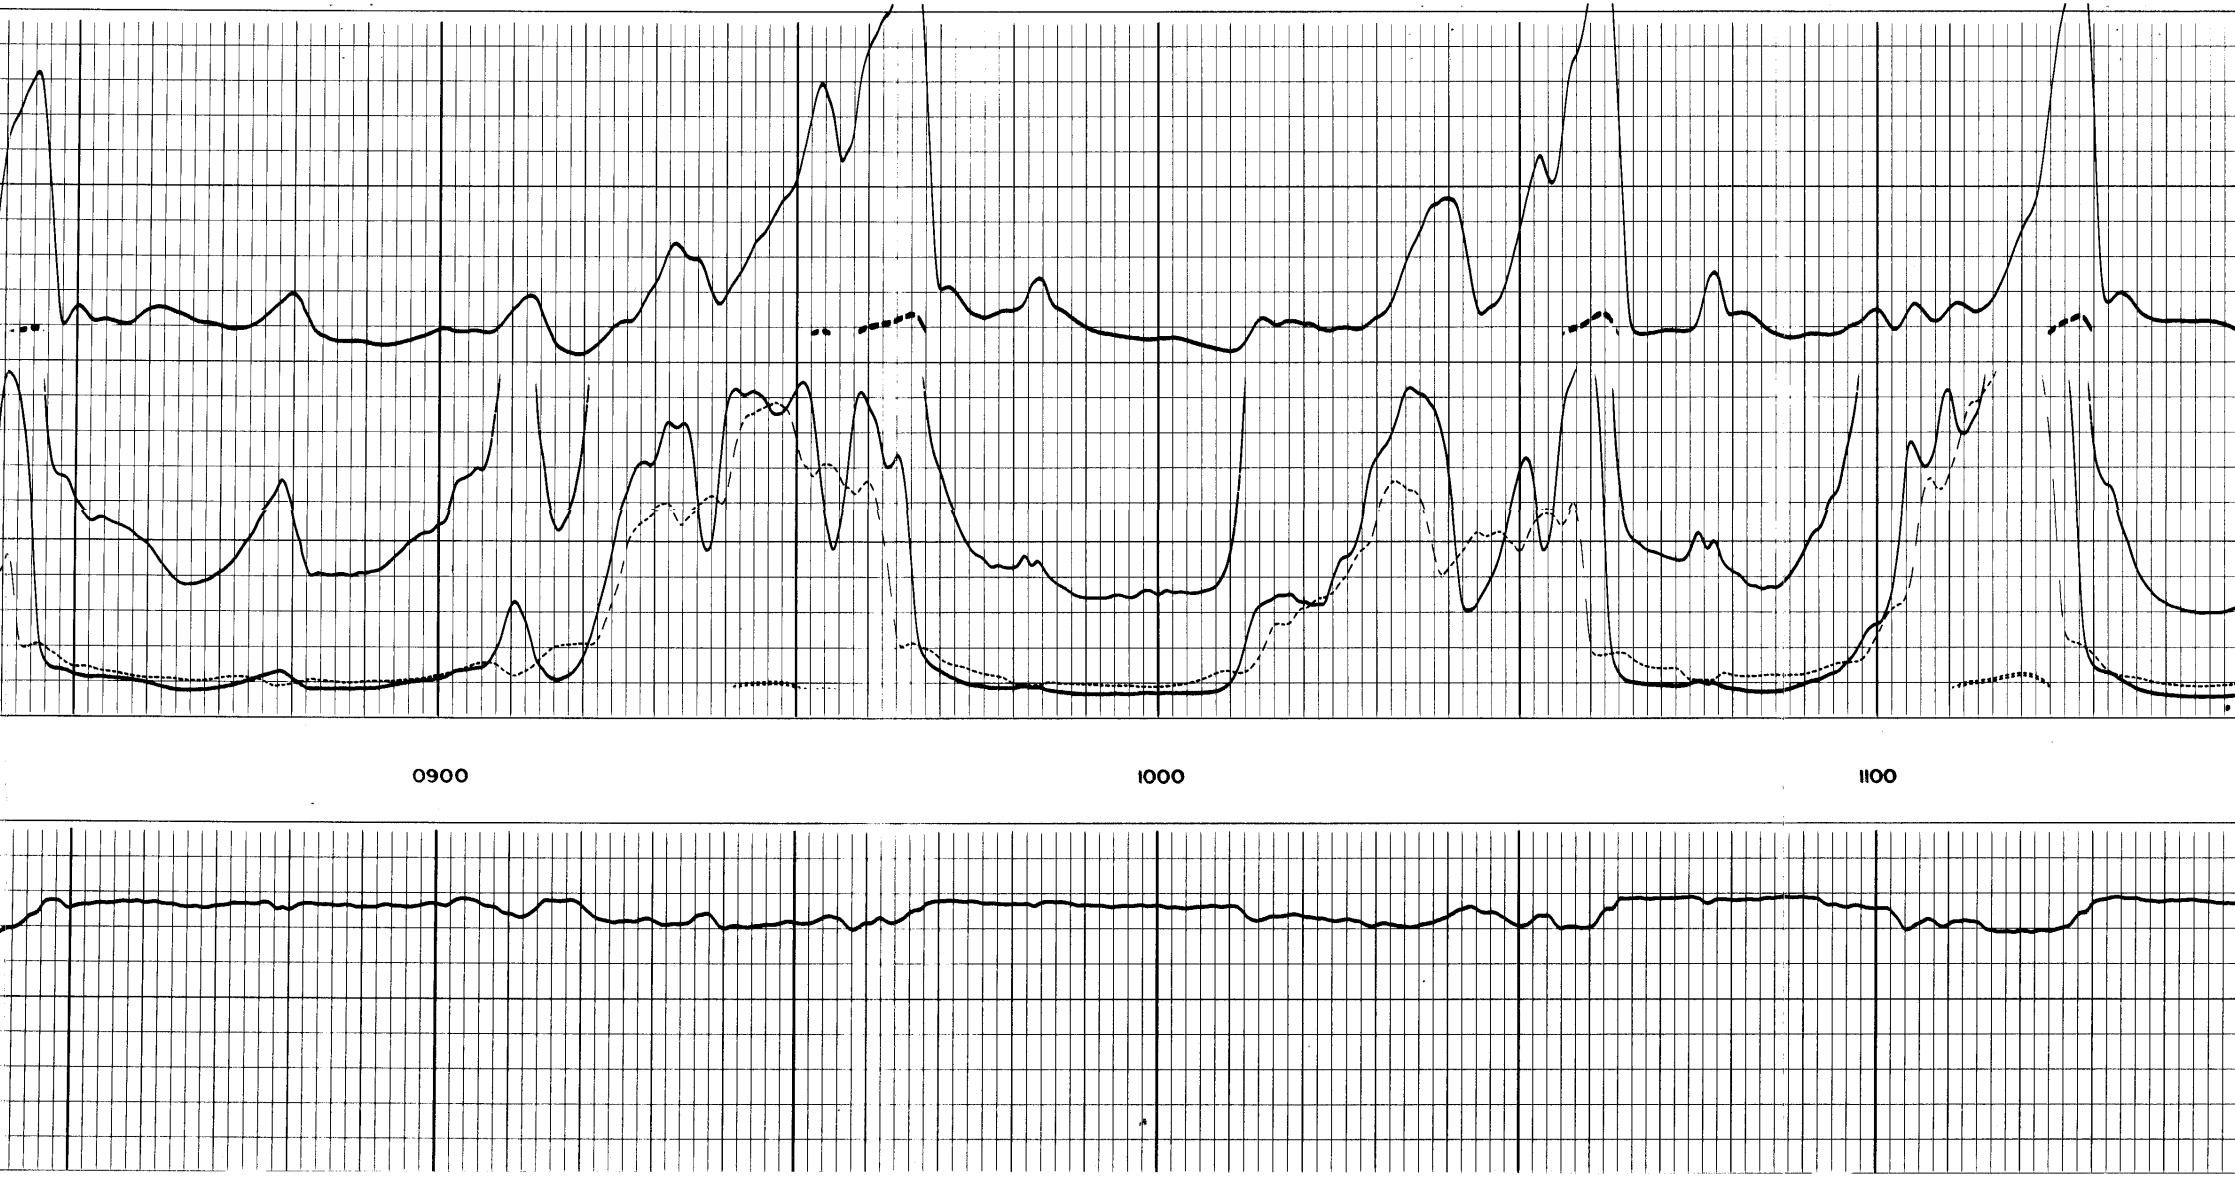

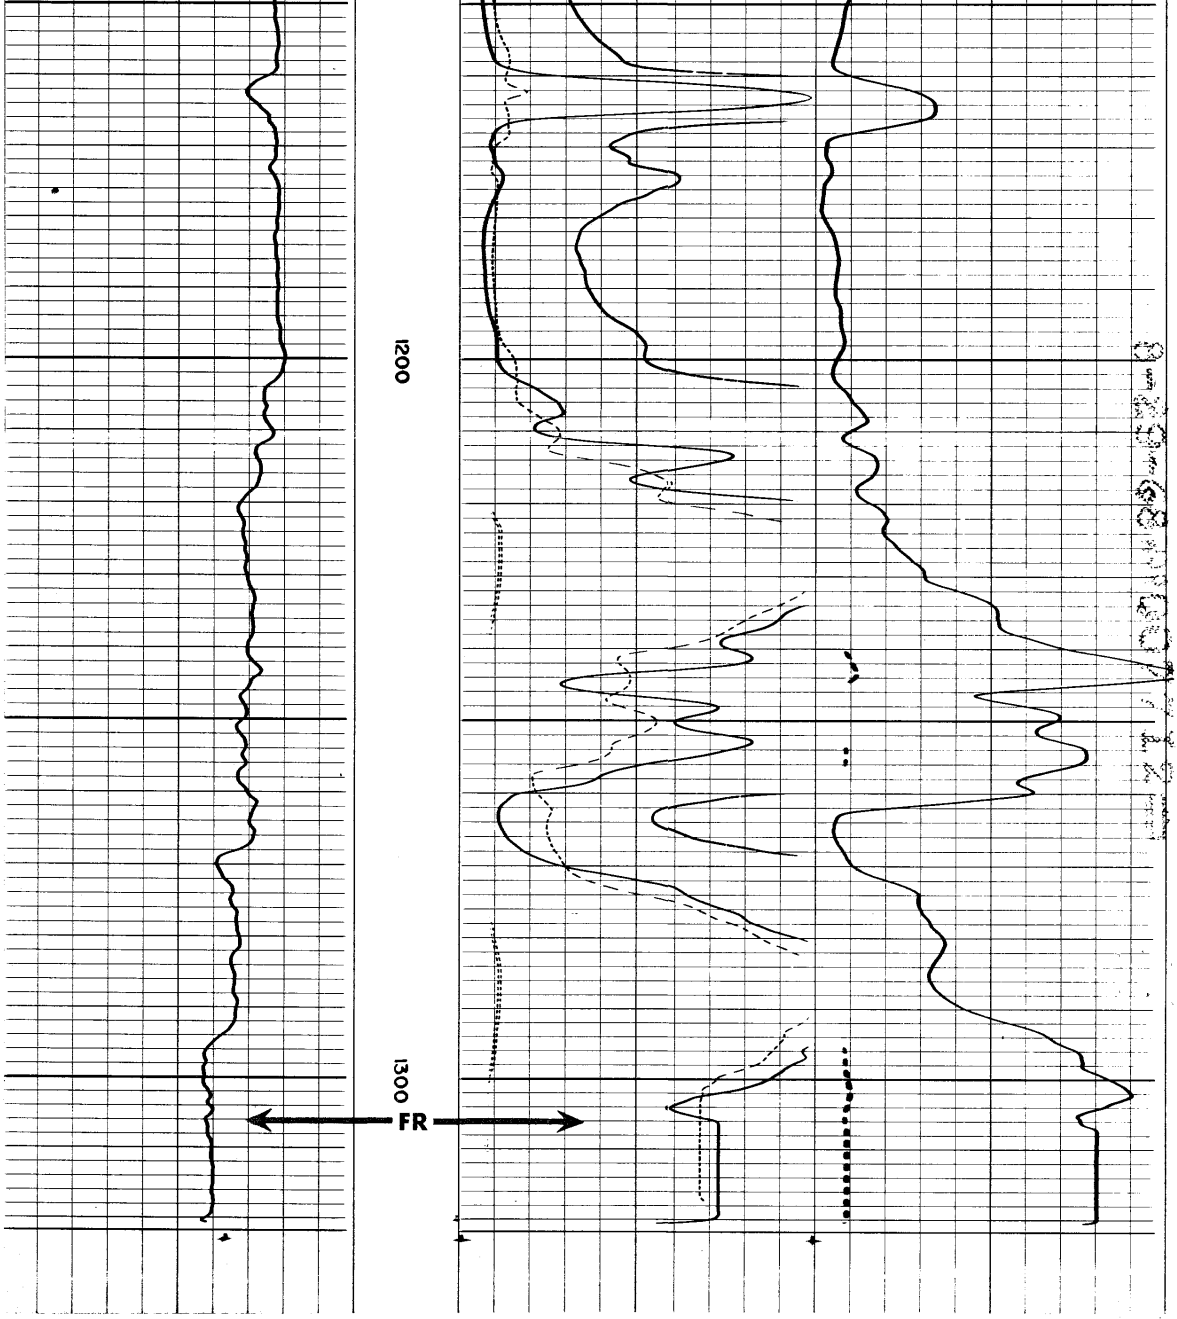

– |10| +

SHORT NORMAL
A-16"-M-18'8"-N-∞-B
0 50
0 500

LONG NORMAL
A-64"-M-65'6"-N-∞-B
0 50
0 500

AMP SHORT NORMAL
0 10

18'8" LATERAL
A-32"-B-17'4"-N-50'10"-M
0 50
0 500

| | | | |
|---|---|---|---|
| SPONTANEOUS POTENTIAL<br>millivolts | Depths | RESISTIVITY<br>ohms. m²/m | RESISTIVITY<br>ohms. m²/m |

COMPANY LAYNE-TEXAS COMPANY
WELL WILCREST IMPROVEMENT DISTRICT #1
FIELD WATER WELL
COUNTY HARRIS STATE TEXAS

Rm 12.3 @ 85 °F
Rmf - @ - °F
Rmc - @ - °F
BHT 103 °F

SCHL. FR 1306'
SCHL. TD 1307'
DRLR TD 1305'
Elev:
KB -
DF -
GL -
RM

SWS-703-A