






ROHS

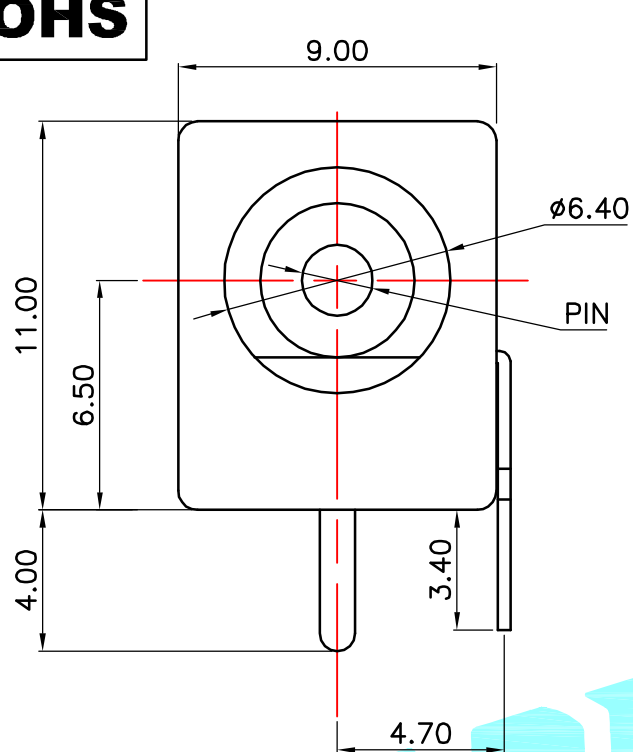



P.C.B LAYOUT(Copper-side view)

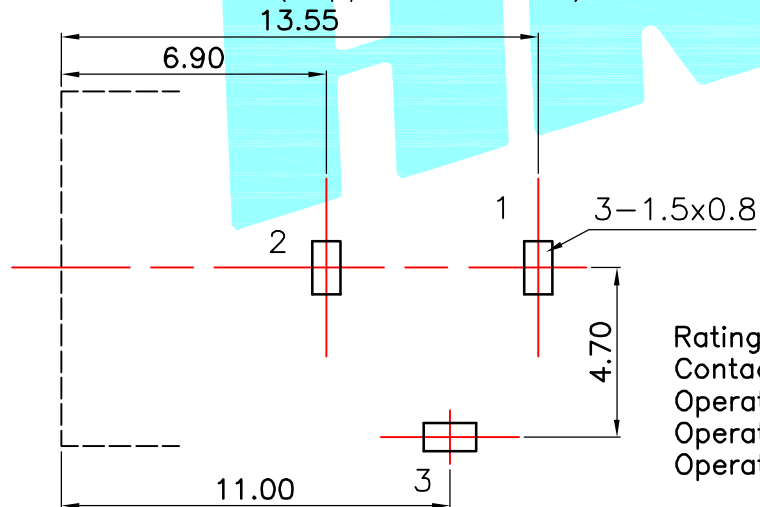

Rating: DC 24V 3A
 Contact Resistance: 100 mΩ Max.
 Operating temperature: -20℃ ~ 70℃
 Operating force: 3-20N
 Operating Life: 5,000 cycles

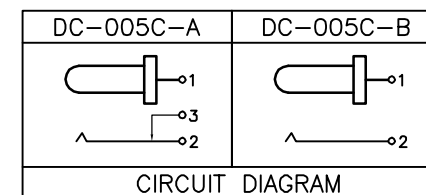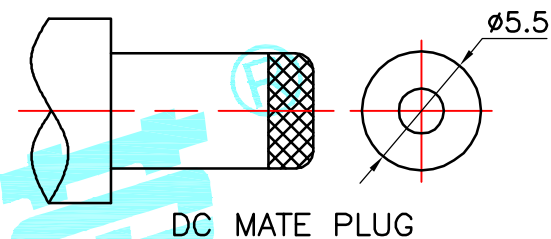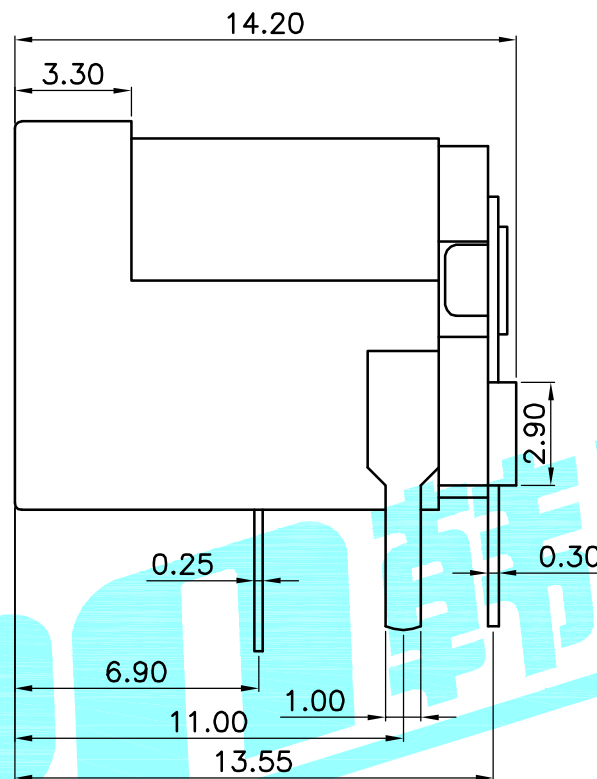

Model No.	1	2
PIN	φ2.0	φ2.5

②	Terminal	——	3	Phosphor bronze	Ag Plating	——			
①	Housing	——	1	Nylon	Black	——			
ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK			
APPROVALS			DATE	 ELECTRONICS CO.,LTD					
DRAWN	J.X.Zhang	2013/11/11	TITLE:				DC JACKS		
CHECKED			PART NO.				DC-005C		
APPROVALS									
TOLERANCES ARE		30~以上	±0.30	ANGLE	UNIT: mm	SCALE: 1:1	PROJ. 		
		10~30	±0.20						
		5~10	±0.15						
		~ 5	±0.10						
		±2'	DRAWING NO.	——	SHEET 1 OF 1				

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
	A		NEW			