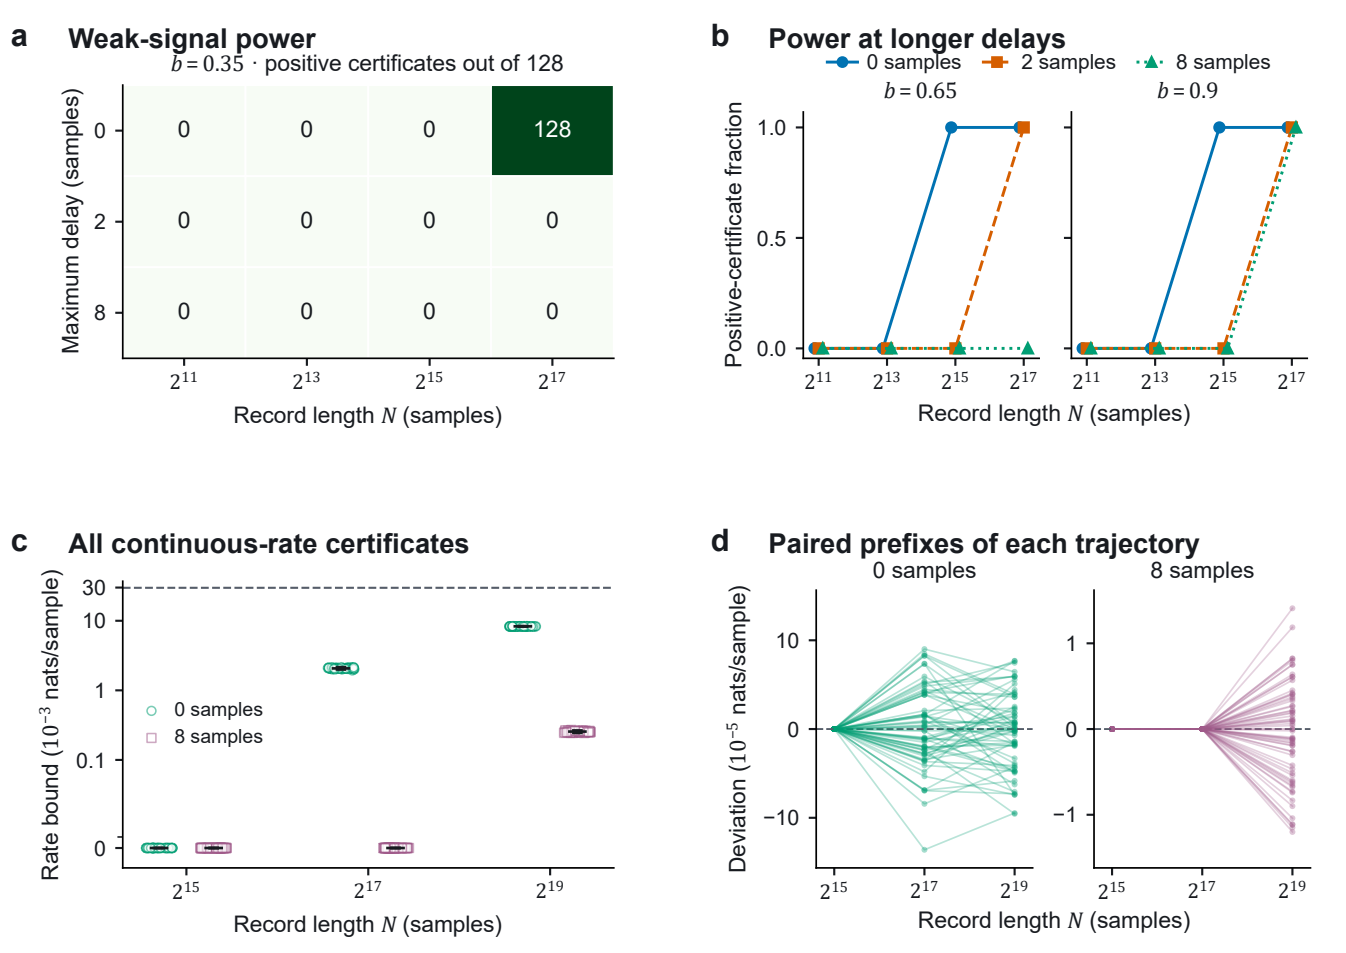

a
Weak-signal power
$b = 0.35$ · positive certificates out of 128
Maximum delay (samples)
0
2
8
0
0
0
128
0
0
0
0
0
0
0
2^{11}
2^{13}
2^{15}
2^{17}
Record length N (samples)
b
Power at longer delays
0 samples
2 samples
8 samples
$b = 0.65$
$b = 0.9$
Positive-certificate fraction
1.0
0.5
0.0
2^{11}
2^{13}
2^{15}
2^{17}
Record length N (samples)
c
All continuous-rate certificates
Rate bound (10^{-3} nats/sample)
30
10
1
0.1
0
0 samples
8 samples
2^{15}
2^{17}
2^{19}
Record length N (samples)
d
Paired prefixes of each trajectory
0 samples
8 samples
Deviation (10^{-5} nats/sample)
10
0
−10
1
0
−1
2^{15}
2^{17}
2^{19}
Record length N (samples)