

PPNAM Station 1 — Scanner App Standard Operating Procedure

Document: PPNAM-SOP-001

System: PPNAM Station 1 AA — Android Scanner App (`com.sysone.scanner`)

Applies to: Chainway C72 / compatible RFID scanner

Scope: Full goods-receiving workflow from SAP document lookup through SAP posting

Table of Contents

1. [Overview](#)
2. [Prerequisites & Before You Begin](#)
3. [App Launch & Dashboard](#)
4. [Settings Configuration](#)
5. [Step 1 – SAP Document Lookup](#)
6. [Step 2 – Product Selection](#)
7. [Step 3 – RFID Tag Assignment](#)
8. [Step 4 – Pallet Offloading](#)
9. [Completing a Session & SAP Posting](#)
10. [Error Messages & Recovery](#)
11. [Unassign Mode](#)
12. [Reassign Mode](#)
13. [Troubleshooting Quick Reference](#)

1. Overview

The **PPNAM Station 1 Scanner App** is used by goods-receiving operators to register incoming truck deliveries against SAP source documents — either a **Purchase Order (PO)** or a **Stock Transfer Request (STR)**.

The app communicates wirelessly with the **Station 1 PC** (the WPF desktop application) via MQTT over the site Wi-Fi network. The Station 1 PC manages the receiving session, validates against SAP Business One, and posts the receiving data (GRPO or Stock Transfer) back to SAP when the session is finalised.

Workflow Summary

Launch App

|



[1] SAP Document Lookup

Enter PO or Transfer Request number → Station 1 creates receiving session

|



[2] Product Selection

Select which product lines are being received in this delivery

|



[3] RFID Tag Assignment

Scan RFID tag for each pallet → Station 1 creates pallet record + barcode

↓ (repeat for every pallet)

Tap ALL ASSIGNED → Print all pallet labels

|



[4] Pallet Offloading

For each pallet leaving the truck: scan barcode + scan RFID → SUBMIT

↓ (repeat for every pallet)

Tap FINISH SESSION

|

▼

Session complete – data posted to SAP

> **Important:** Each step must be completed in order. The Tag Assignment and Offload tiles on the dashboard are locked until the preceding step is done. You cannot skip steps.

2. Prerequisites & Before You Begin


Before starting a receiving session, confirm all of the following:

#	Check	How to verify	
-- -	-----	-----	
1	Scanner is charged (>30% battery)	Battery indicator in status bar	
2	Scanner Wi-Fi is connected to the site network	Wi-Fi icon in status bar	
3	Station 1 PC is powered on and the PPNAM desktop app is running	Check with supervisor	
4	MQTT broker is reachable	Green dot on the app dashboard (see Section 3)	
5	TSC label printer is powered on	Green indicator light on printer	
6	RFID tags are available for each pallet	Physical check at receiving bay	
7	SAP PO or Transfer Request number is known	Check the delivery note / waybill	

If the MQTT dot is **red** when you launch the app, the scanner cannot reach Station 1. Do not begin — contact IT or your supervisor.

3. App Launch & Dashboard

Tap the **PPNAM Scanner** icon on the scanner home screen to launch the app.

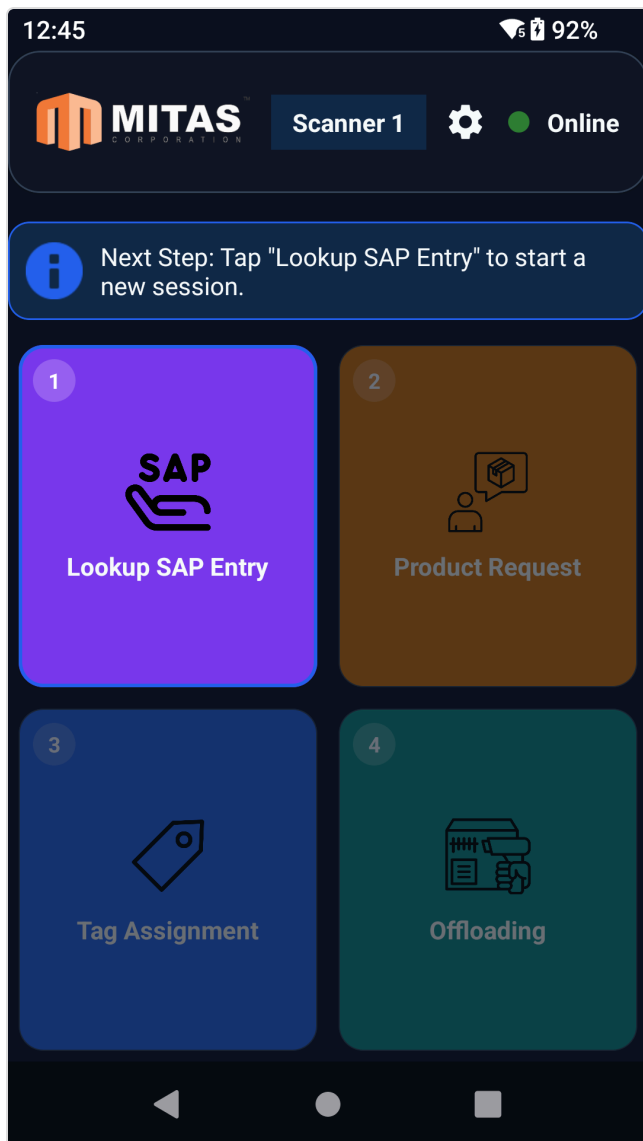

The dashboard is the home screen of the app. It contains four tiles and a status indicator:

Dashboard Tiles

Tile	Purpose	When available	
-----	-----	-----	
Lookup SAP Entry	Start a new receiving session by entering a SAP document number	Always	
Tag Assignment	Assign RFID tags to pallets	After Step 2 (Product Selection) is complete	
Offload	Record pallets being removed from the truck	After Step 3 (Tag Assignment) is complete	
⚙ Settings	Configure MQTT connection, scanner ID, and station ID	Always (requires supervisor password)	

MQTT Connection Status Dot

In the top bar of the dashboard there is a small coloured dot indicating the MQTT connection state:

-  **Green** — Scanner is connected to the MQTT broker and Station 1 is online. Safe to proceed.
-  **Red** — No connection. Do not start a session. Check Wi-Fi and contact IT.


> **Note:** If the **Tag Assignment** and **Offload** tiles appear greyed out or disabled, this is normal when no session is active. They will unlock automatically as you progress through the workflow.

4. Settings Configuration

Settings are protected by a supervisor password. **Operators should not need to change settings during normal operation.** Only change settings when instructed by a supervisor or IT.

Accessing Settings


Step 1. Tap the  **gear icon** in the top-right corner of the dashboard.

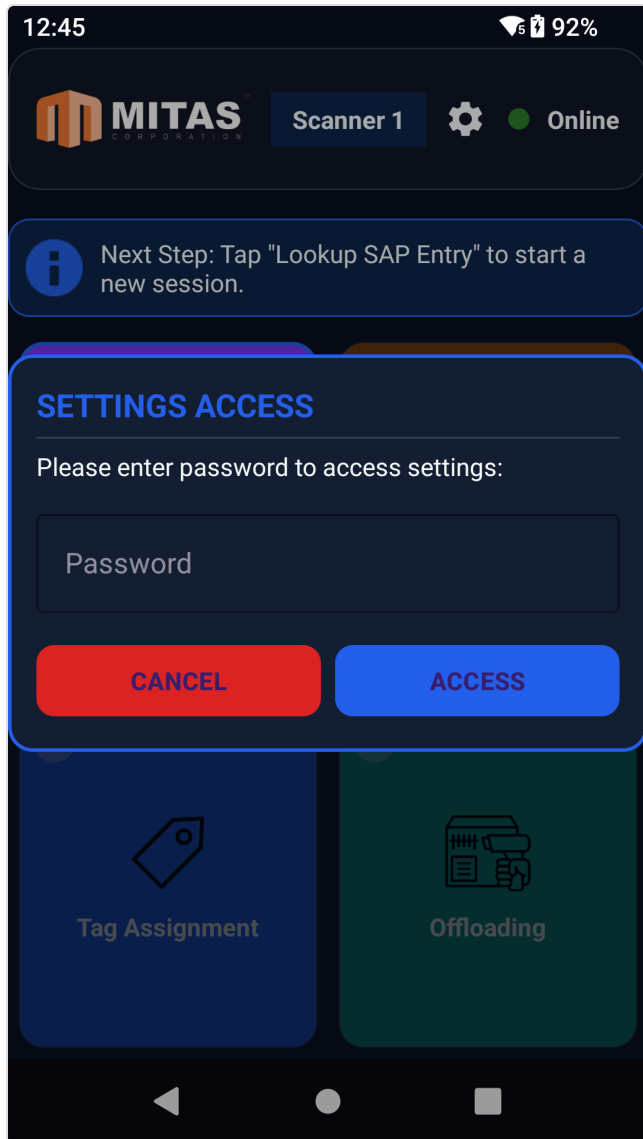

Step 2. Type the supervisor password in the password field and tap **ACCESS**.

If the password is incorrect, the dialog will close without navigating to Settings. Ask your supervisor for the correct password.

Settings Screens

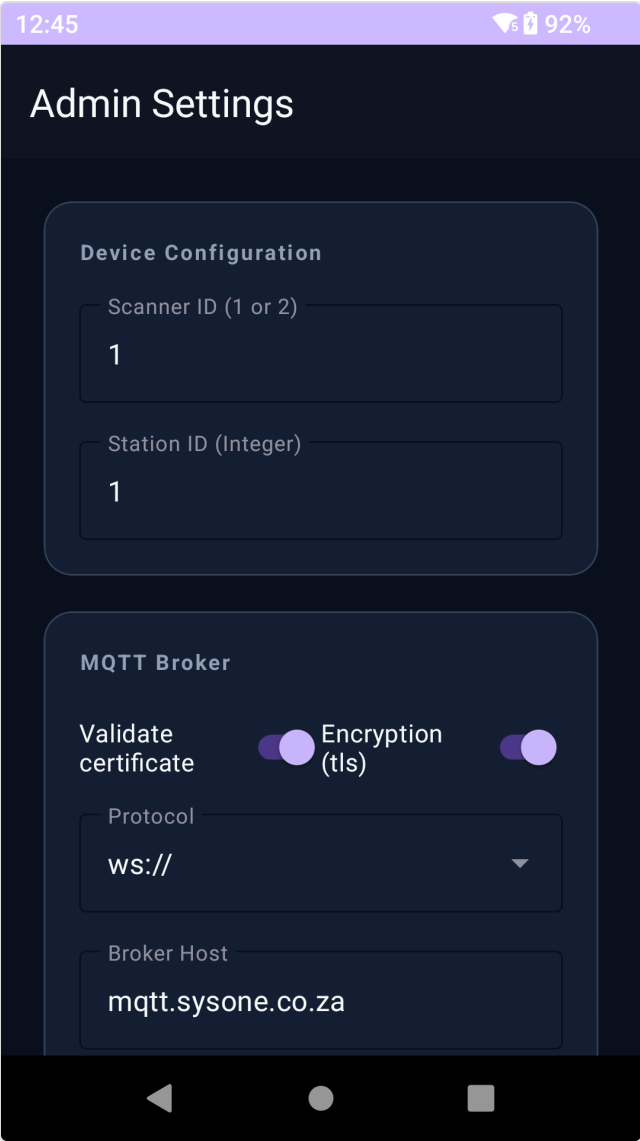


MQTT Connection (top section):

Field	Description	Example	
-----	-----	-----	
MQTT Host	Hostname or IP address of the MQTT broker	`mqtt.sysone.co.za`	
MQTT Port	Port number (443 for WSS, 1883 for plain)	`443`	
Protocol	Transport protocol (`ws://` for WebSocket)	`ws://`	
Use SSL	Toggle on for encrypted connection (WSS)	On	
Validate Certificate	Toggle on to verify TLS certificate	On	
Username / Password	MQTT broker credentials (provided by IT)	`admin` / `****`	


Device Identity:

Field	Description	Example	
-----	-----	-----	
Scanner ID	Numeric ID of this scanner device (1 or 2)	`1`	
Station ID	Numeric ID of the Station 1 PC this scanner reports to	`1`	

> Scanner ID and Station ID must match the configuration on the Station 1 PC. Scanner 1 communicates on topic `PPNAM/scanner_1/#` and listens for responses on `PPNAM/station_1/#`.

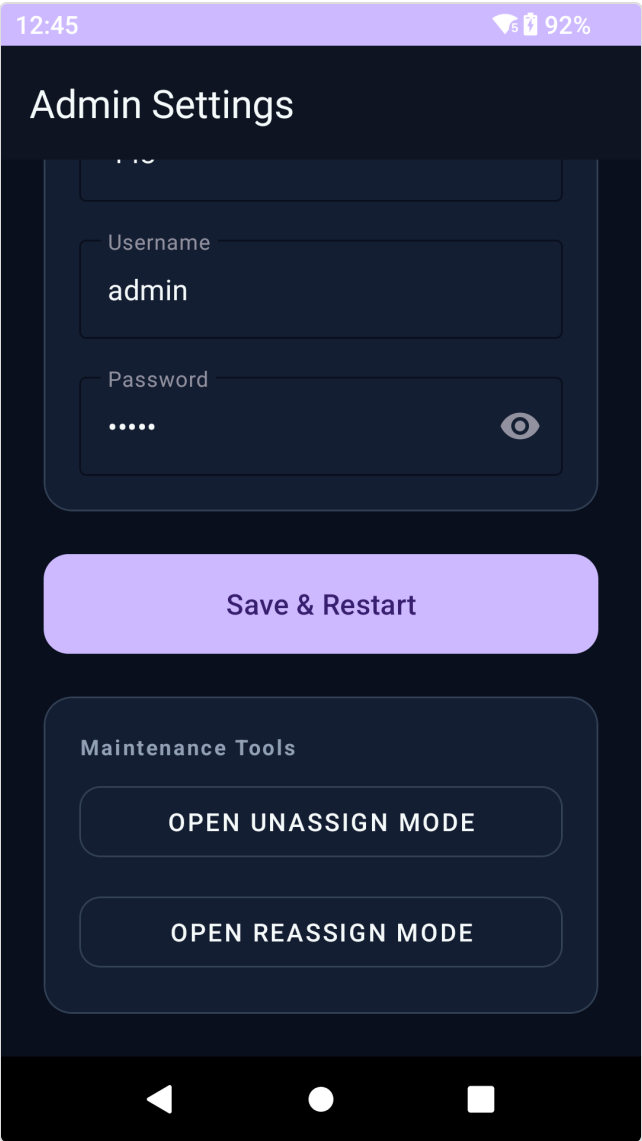

The middle section may show additional connection options or status information depending on the app version.

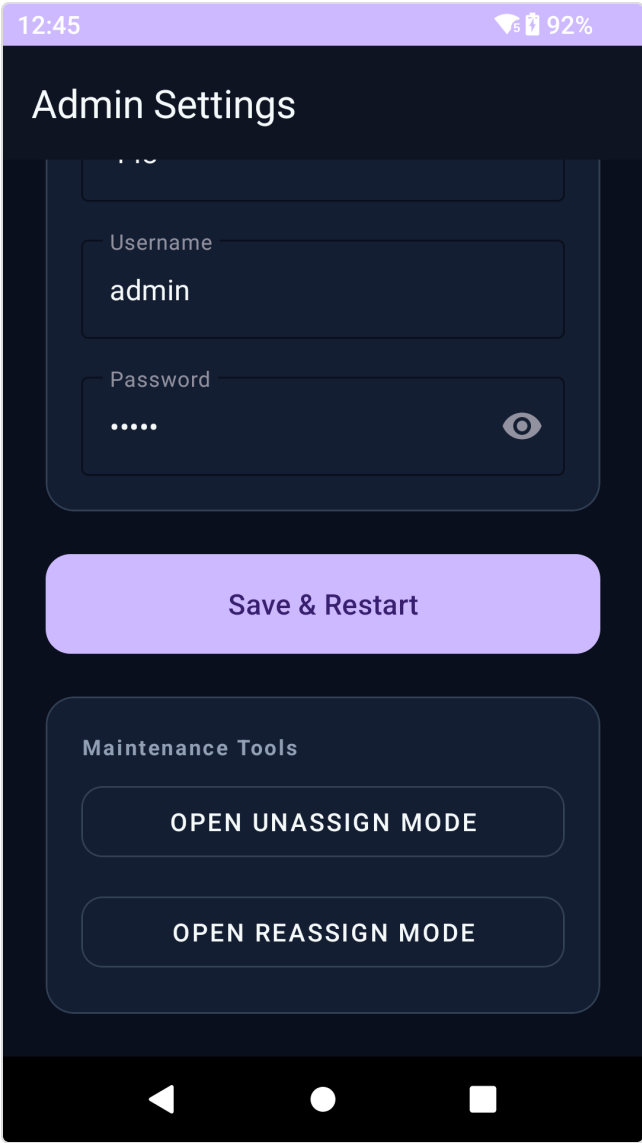

Bottom section — utility modes:


Button	Purpose	See section	
-----	-----	-----	
UNASSIGN MODE	Remove an RFID tag from its pallet assignment	Section 11	
REASSIGN MODE	Move an RFID tag to a different pallet barcode	Section 12	

Step 3. Tap the **back arrow** (←) to save settings and return to the dashboard. Settings are saved automatically when you leave.

5. Step 1 – SAP Document Lookup

This step creates a **receiving session** on Station 1 linked to your SAP source document.

Step 1. From the dashboard, tap **Lookup SAP Entry**.

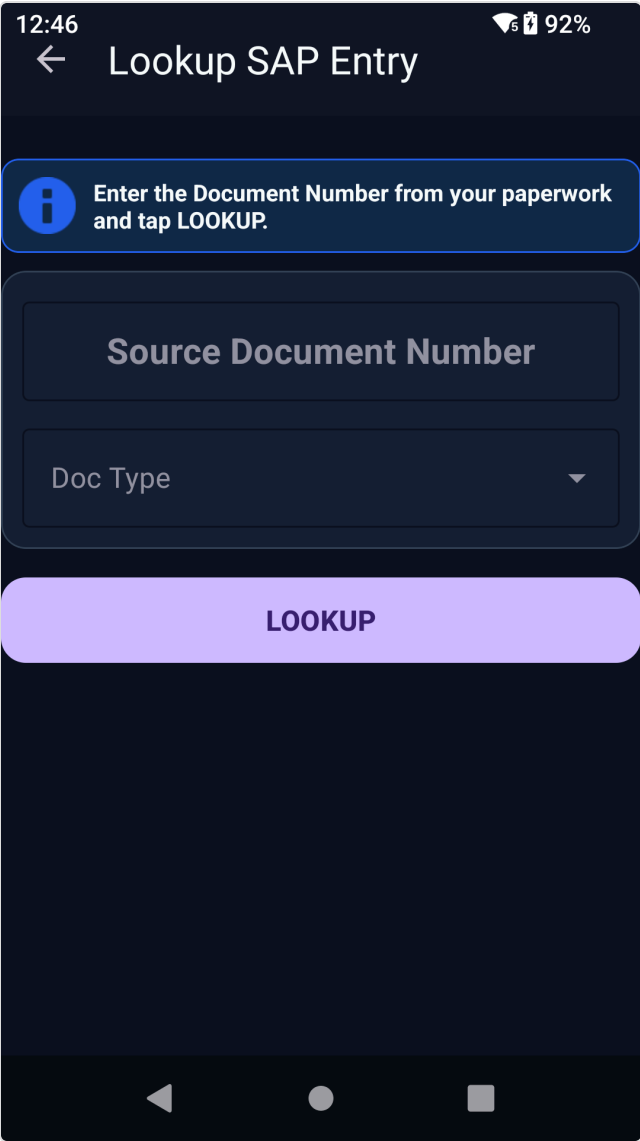


The SAP Lookup screen has two input fields and a **LOOKUP** button:

Field	Description	
-----	-----	
Document Number	The SAP document number from the delivery note or waybill. For a Purchase Order this is the PO number (e.g. `220012017`). For a Stock Transfer this is the Inventory Transfer Request number.	
Document Type	Select **Purchase Order** or **Transfer Request** from the dropdown. This must match the type of the SAP document exactly.	

Step 2. Tap the **Document Number** field and type the SAP document number using the on-screen keyboard.

Step 3. Tap the **Document Type** dropdown and select the correct type:

- **Purchase Order** — for incoming deliveries from external suppliers
- **Transfer Request** — for internal stock transfers between warehouses

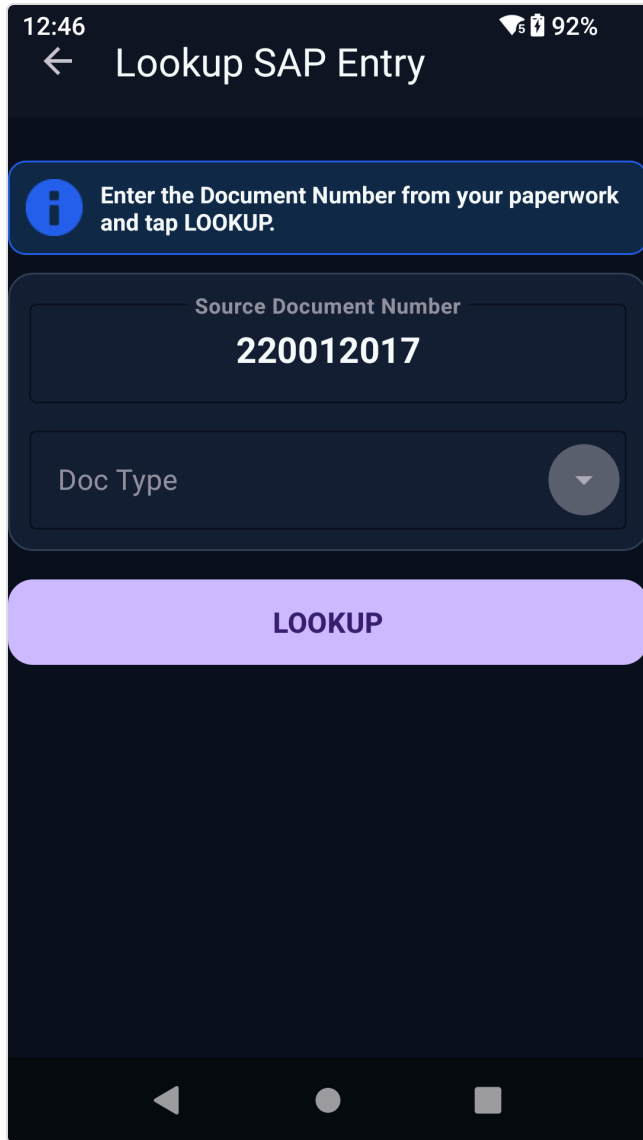

12:46 92%

← Lookup SAP Entry

i Enter the Document Number from your paperwork and tap LOOKUP.


Source Document Number

220012017

Doc Type

LOOKUP


> Verify both the document number and type against the physical delivery note before tapping LOOKUP. An incorrect document type will cause a lookup failure even if the document number is correct.

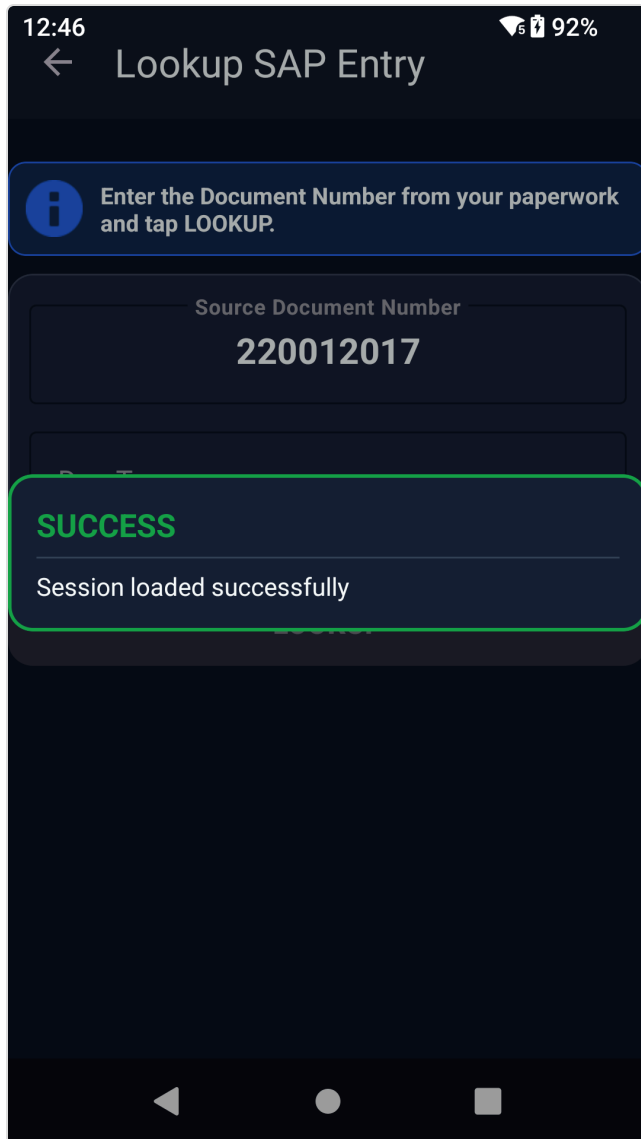Step 4. Tap LOOKUP.

The app publishes a request to Station 1 via MQTT and shows a "**Working...**" progress popup while waiting for the response. Station 1 queries SAP Business One and responds within a few seconds.

- **Do not tap LOOKUP again** while the spinner is showing — this will send a duplicate request.
- If the spinner runs for more than 15 seconds without a response, Station 1 may not be reachable. Tap back and check the MQTT connection dot on the dashboard.

Step 5. When Station 1 responds successfully:

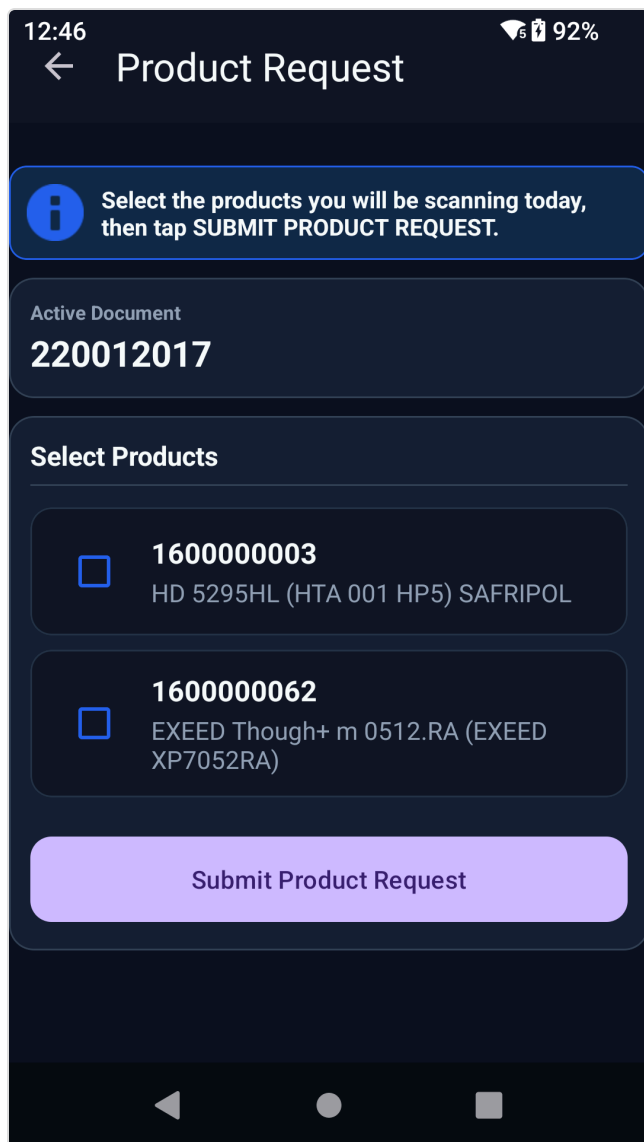

A "SUCCESS" popup appears briefly (approximately 2 seconds) confirming:


- The session has been created on Station 1
- The SAP document was found and is open
- The app is ready to proceed to product selection

The popup auto-dismisses and the app **automatically navigates** to the Product Selection screen. You do not need to tap anything.

> If you see a **red "FAILED"** popup instead, see [Section 10.1 – SAP Lookup Failed](#).

6. Step 2 – Product Selection

After a successful SAP lookup the app automatically navigates to the **Product Selection** screen and fetches the open product lines from the SAP document.

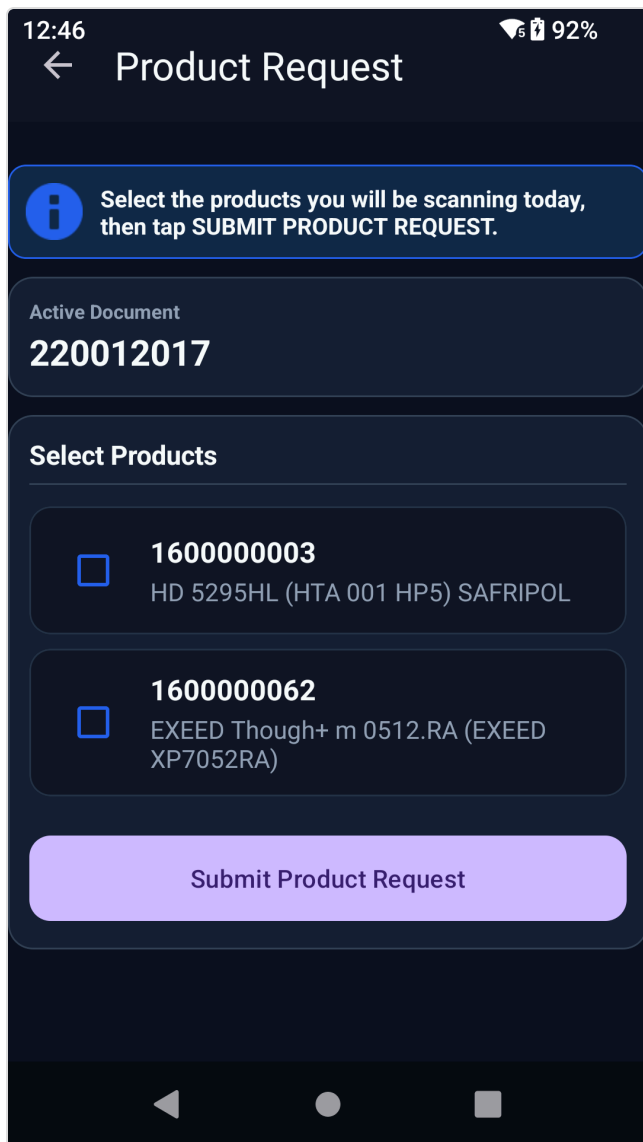

The screen shows:

- The **SAP document number** at the top (for reference)
- A list of **open product lines** from the SAP document, each showing the product code and description
- A **checkbox** next to each product line
- A **REQUEST** button at the bottom

Each product line represents a material/SKU that is open on the SAP document. Products that are already fully received will not appear.

Step 1. Tick the checkbox next to **each product that is physically arriving on this truck.**

12:46 92%

Product Request

Select the products you will be scanning today, then tap SUBMIT PRODUCT REQUEST.

Active Document

220012017

Select Products

☒	1600000003 HD 5295HL (HTA 001 HP5) SAFRIPOL
☐	1600000062 EXEED Though+ m 0512.RA (EXEED XP7052RA)

Submit Product Request

> If only some products from the SAP document are on this truck (e.g. a partial delivery), only tick those products. You can select multiple products — tick all that apply.

>


> If a product you expect to see is missing from the list, the line may already be fully received in SAP. Check with your supervisor before proceeding.

Step 2. Once all relevant products are ticked, tap **REQUEST**.

The app sends your selection to Station 1. Station 1 confirms the selection and prepares the pallet context, then the app automatically navigates to the **Tag Assignment** screen.

7. Step 3 – RFID Tag Assignment

On the Tag Assignment screen, each physical pallet on the truck is registered in the system by scanning its RFID tag. Station 1 creates a pallet record and returns a **barcode** that will be printed on the pallet label.

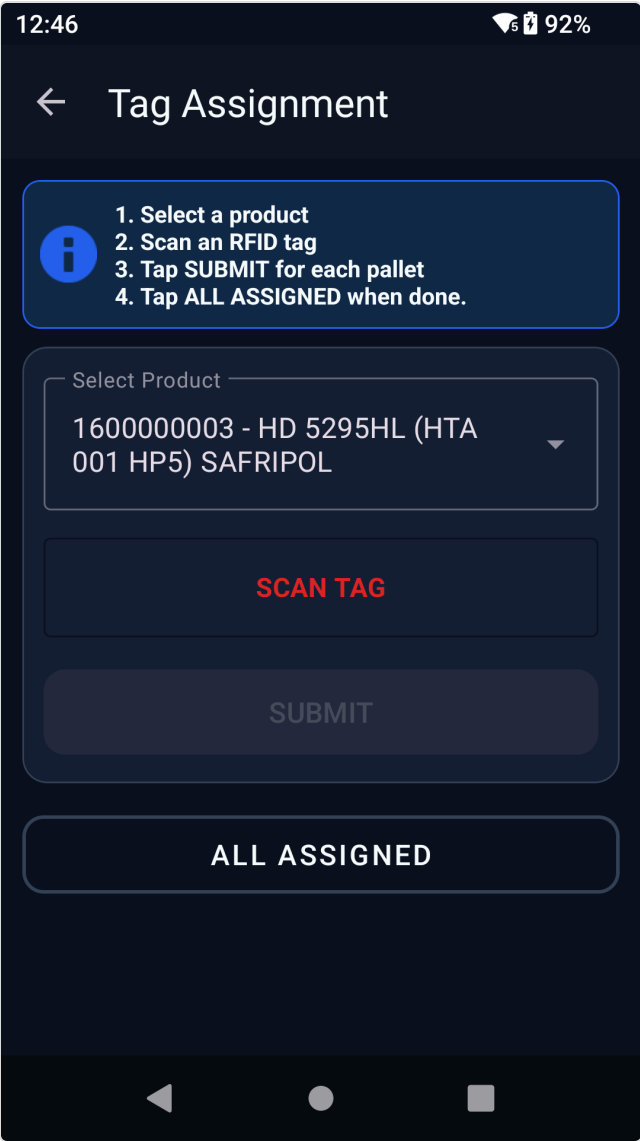


Screen Fields

Field	Description	
-----	-----	
Product	Dropdown to select which product this pallet contains. If only one product was selected, this is pre-filled.	
Pallet #	The pallet sequence number for this product. Auto-increments — only change if instructed.	
RFID Tag	The RFID tag ID. Populated automatically when you scan a tag with the scanner's RFID reader.	
SUBMIT	Sends the assignment request to Station 1.	

Assigning Each Pallet

Step 1. Confirm the **Product** dropdown shows the correct product for this pallet. If multiple products are being received, select the correct one from the dropdown.

Step 2. Hold the scanner over the RFID tag on the pallet (or inlay embedded in the pallet). The RFID field populates automatically.

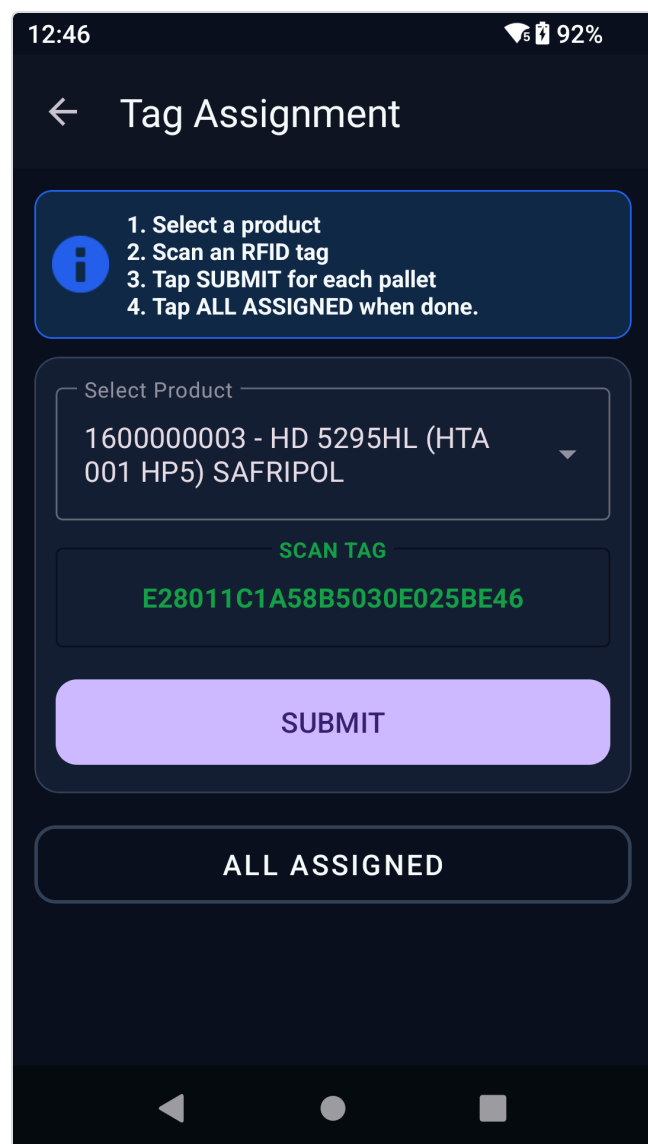


The screenshot shows a mobile application interface for 'Tag Assignment'. At the top, the status bar displays the time 12:46, signal strength, and 92% battery. The app header has a back arrow and the title 'Tag Assignment'. Below this is an information box with a blue 'i' icon and four steps: 1. Select a product, 2. Scan an RFID tag, 3. Tap SUBMIT for each pallet, and 4. Tap ALL ASSIGNED when done. The main form contains a 'Select Product' dropdown menu currently showing '1600000003 - HD 5295HL (HTA 001 HP5) SAFRIPOL'. Below the dropdown is a green 'SCAN TAG' button. Underneath the scan button, the scanned RFID tag ID 'E28011C1A58B5030E025BE46' is displayed in green text. At the bottom of the form are two large buttons: a purple 'SUBMIT' button and a white 'ALL ASSIGNED' button. The bottom of the screen shows the standard Android navigation bar with back, home, and recent apps icons.

The scanned tag ID (a hexadecimal string, e.g. `E28011C1A5...`) appears in the **RFID Tag** field. Check that it is populated before proceeding.

> If the RFID field does not populate, ensure the tag is within range (typically 10–50 cm for the Chainway C72) and the tag is not damaged or obscured by metal.

Step 3. Tap **SUBMIT**.

The app sends the assignment request to Station 1. Station 1 creates the pallet record in the database and returns a confirmation with a **pallet code** and **barcode**.

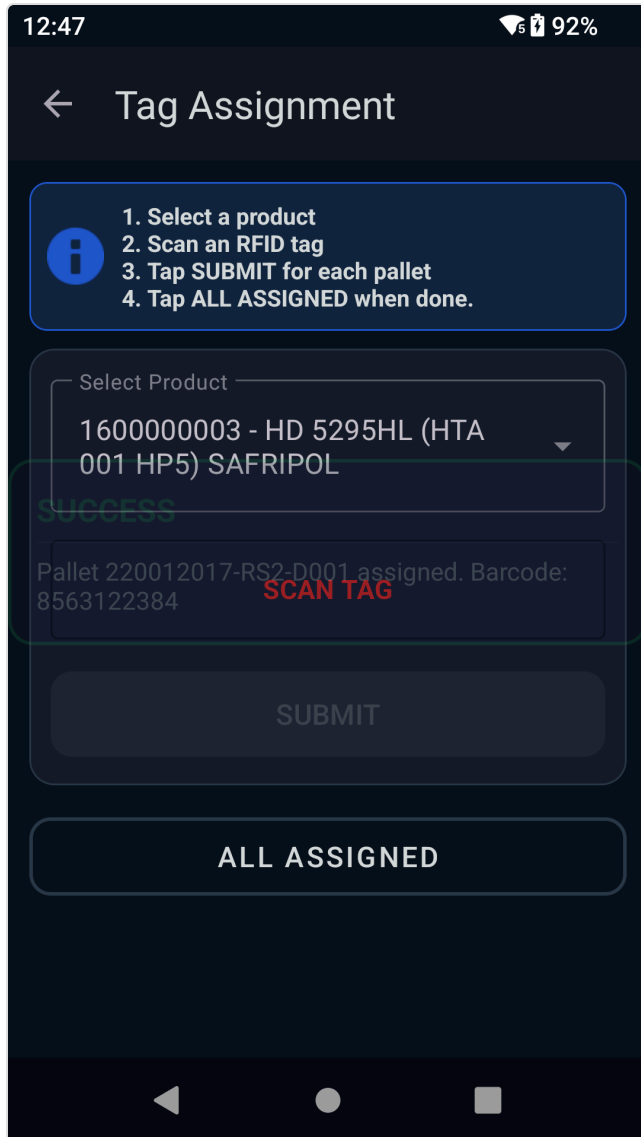


On success:

- A green "**SUCCESS**" confirmation popup appears showing the pallet code and barcode
- The pallet is added to the assignment list below
- The **Pallet #** counter increments ready for the next pallet

- The **RFID Tag** field clears ready for the next scan

Step 4. Repeat Steps 1–3 for every pallet on the truck.

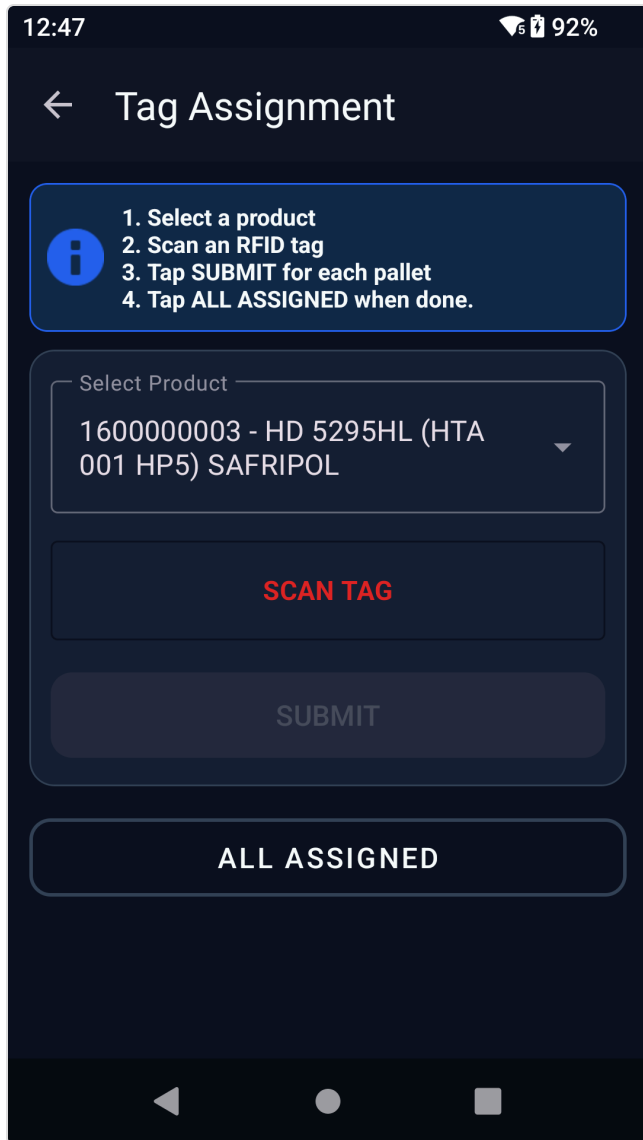


The list grows as each pallet is assigned. You can scroll down to see all assigned pallets. Each row shows the pallet sequence number, pallet code, RFID tag, and barcode.

> **Important:** Every physical pallet must be scanned before tapping ALL ASSIGNED. Do not tap ALL ASSIGNED until all pallets on the truck have been registered.

Completing Tag Assignment

Step 5. When all pallets on the truck have been assigned, tap **ALL ASSIGNED**.

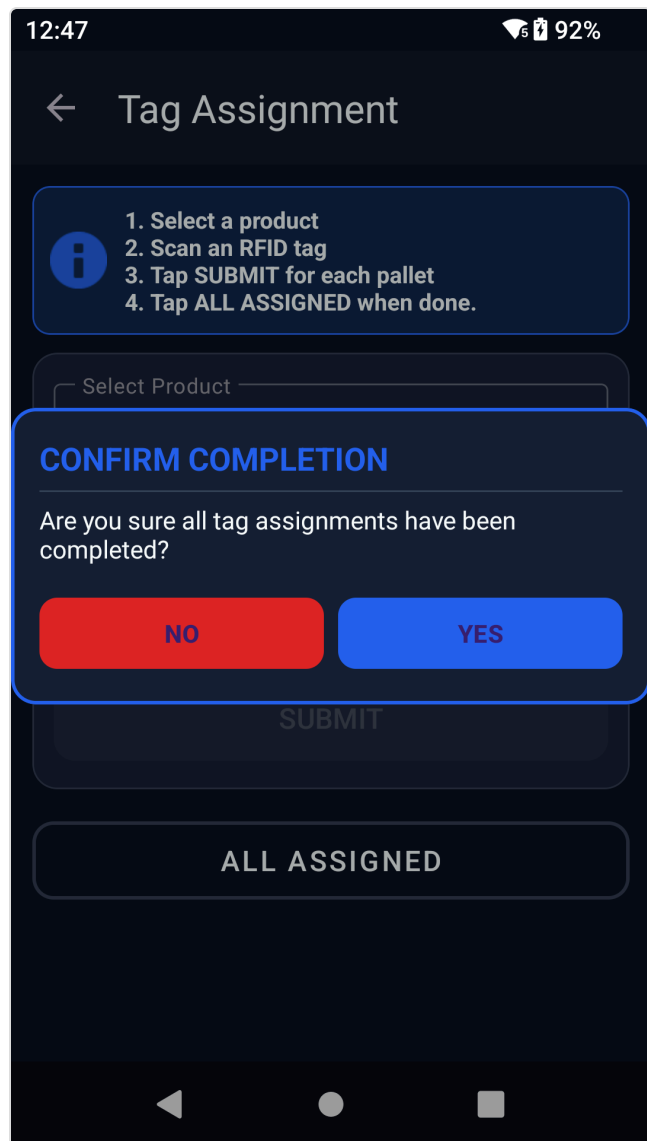

A confirmation dialog appears asking you to confirm the total pallet count. Tap **YES** to proceed.

> If you tapped **ALL ASSIGNED** by mistake or have more pallets to add, tap **NO** or the back button to return to the assignment screen.

Step 6. After confirming, a **Print All** popup appears:



This popup confirms:

- The total number of pallet labels to be printed
- The target printer (configured by IT — typically a TSC ML241P label printer on the site network)


Tap **PRINT ALL** to send all pallet labels to the printer.

> Ensure the TSC label printer is powered on and has label stock loaded before tapping PRINT ALL. If the printer fails, see [Section 10.3 – Print All Failed](#).

After successful printing the app automatically navigates to the **Offload** screen.

8. Step 4 – Pallet Offloading

The Offload screen is used to record each pallet as it is physically removed from the truck. This step validates the pairing between the printed barcode label and the RFID tag, and records the actual bag count for the pallet.

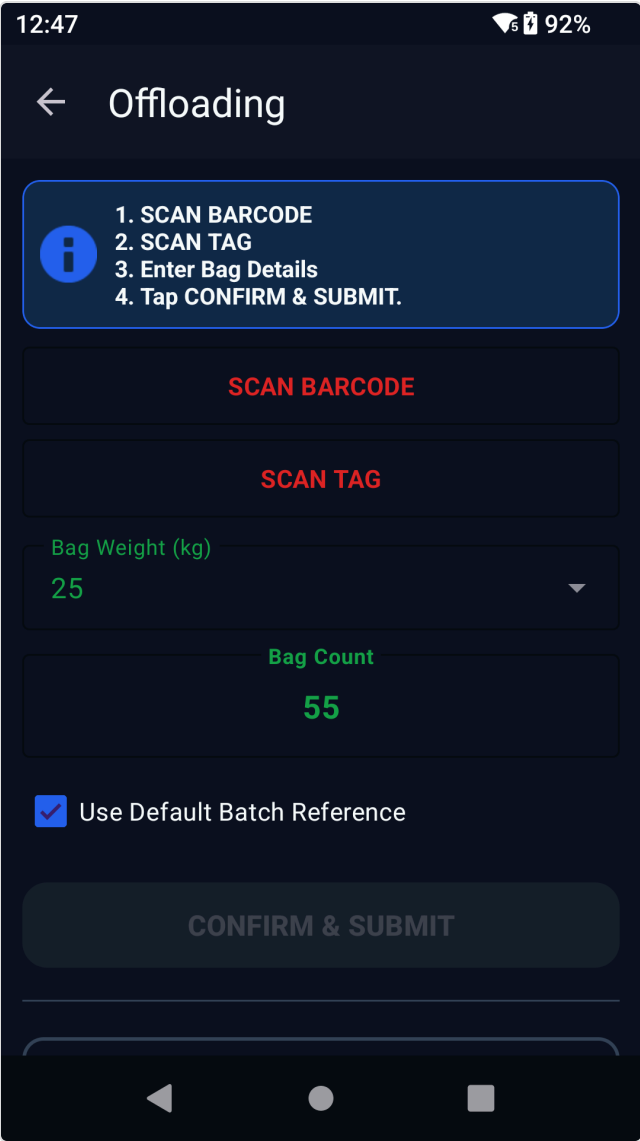

Screen Fields

Field	Description
-----	-----
Barcode	Scan the barcode from the printed pallet label. Auto-populates when scanned.
RFID Tag	Scan the RFID tag on the pallet. Auto-populates when scanned.
Bag Count	Enter the actual number of bags on this pallet (default is the expected bag count from the SAP document). Adjust if the actual count differs.
SUBMIT	Validates the barcode/RFID pair against Station 1 and records the offload.

Offloading Each Pallet

Step 1. With the first pallet, point the scanner at the **barcode** on the printed label and scan it.

The screenshot shows a mobile application interface titled 'Offloading'. At the top, the status bar displays the time 12:47, signal strength, and 92% battery. Below the title is a back arrow. A blue information box contains a list of steps: 1. SCAN BARCODE, 2. SCAN TAG, 3. Enter Bag Details, and 4. Tap CONFIRM & SUBMIT. Below this, a green text field displays the scanned barcode '8563122384'. A red button labeled 'SCAN TAG' is positioned below the barcode. Underneath is a dropdown menu for 'Bag Weight (kg)' with '25' selected. Below that is a green text field for 'Bag Count' displaying '55'. A checkbox labeled 'Use Default Batch Reference' is checked. At the bottom is a large grey button labeled 'CONFIRM & SUBMIT'. The Android navigation bar is visible at the very bottom.

The **Barcode** field populates with the scanned value. Check it matches the label.

Step 2. Scan the **RFID tag** on the same pallet.

12:47 92%

← Offloading

1. SCAN BARCODE
2. SCAN TAG
3. Enter Bag Details
4. Tap CONFIRM & SUBMIT.

8563122384

E28011C1A58B5030E025BE46

Bag Weight (kg)
25

Bag Count
55

☒ Use Default Batch Reference

CONFIRM & SUBMIT

Both the Barcode and RFID Tag fields are now populated. The bag count field should show the expected number — adjust it if the actual bag count on this pallet is different.

> **Scan the barcode and RFID tag from the same pallet.** Mixing a barcode from one pallet with an RFID tag from another will cause a validation failure (see [Section 10.4](#)).

Step 3. Verify or update the **Bag Count** if necessary, then tap **SUBMIT**.

12:47 92%

← Offloading

1. SCAN BARCODE
2. SCAN TAG
3. Enter Bag Details
4. Tap CONFIRM & SUBMIT.

SCAN BARCODE

SCAN TAG

Bag Weight (kg)
25

Bag Count
55

☒ Use Default Batch Reference

CONFIRM & SUBMIT

Station 1 validates the barcode/RFID pair against the assignment records. On success:

- A green "SUCCESS" popup confirms the pallet has been offloaded
- The popup shows the pallet code, batch reference, and total pallet weight (bag count × bag weight)
- All fields clear automatically, ready for the next pallet

Step 4. Repeat Steps 1–3 for every remaining pallet.

12:47

 92%

 Offloading



1. SCAN BARCODE

2. SCAN TAG

3. Enter Bag Details

4. Tap CONFIRM & SUBMIT.

2388095374

SCAN TAG

Bag Weight (kg)

25



Bag Count

55

☒ Use Default Batch Reference

CONFIRM & SUBMIT

12:47

 92%

 Offloading



1. SCAN BARCODE

2. SCAN TAG

3. Enter Bag Details

4. Tap CONFIRM & SUBMIT.

2388095374

E28011C1A5D52F8A75548A40

Bag Weight (kg)

25



Bag Count

55

☒ Use Default Batch Reference

CONFIRM & SUBMIT



12:47 92%

← Offloading

1. SCAN BARCODE
2. SCAN TAG
3. Enter Bag Details
4. Tap CONFIRM & SUBMIT.

SCAN BARCODE

SCAN TAG

Bag Weight (kg)
25

Bag Count
55

☒ Use Default Batch Reference


CONFIRM & SUBMIT

Continue scanning each pallet's barcode and RFID tag in sequence until all pallets have been recorded as offloaded.

9. Completing a Session & SAP Posting

When every pallet has been scanned off the truck, finalise the session to trigger SAP posting.

Step 1. Tap **FINISH SESSION** on the Offload screen.

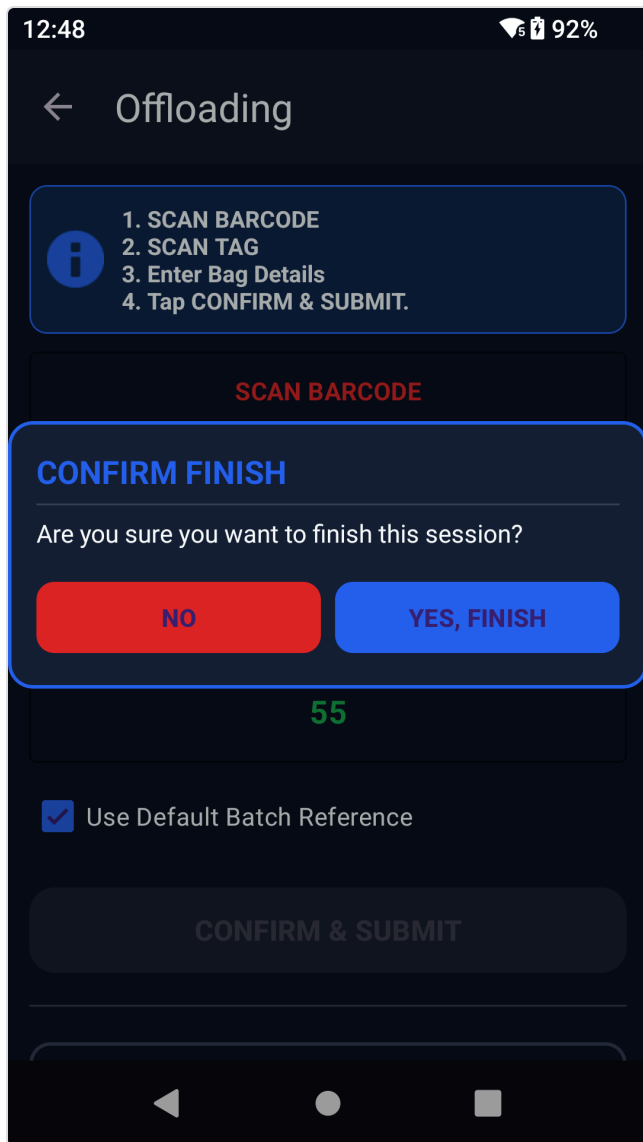


A confirmation dialog appears. This is your last chance to go back — if you have missed any pallets, tap **NO** and offload the remaining pallets first.

Tap **YES** to confirm session completion.

Step 2. Station 1 processes the finalisation:

- All offloaded pallets are queued for SAP posting

- Station 1 creates the SAP goods receipt document (GRPO for a Purchase Order, or Stock Transfer for a Stock Transfer Request)
- The session is marked complete in the Station 1 database

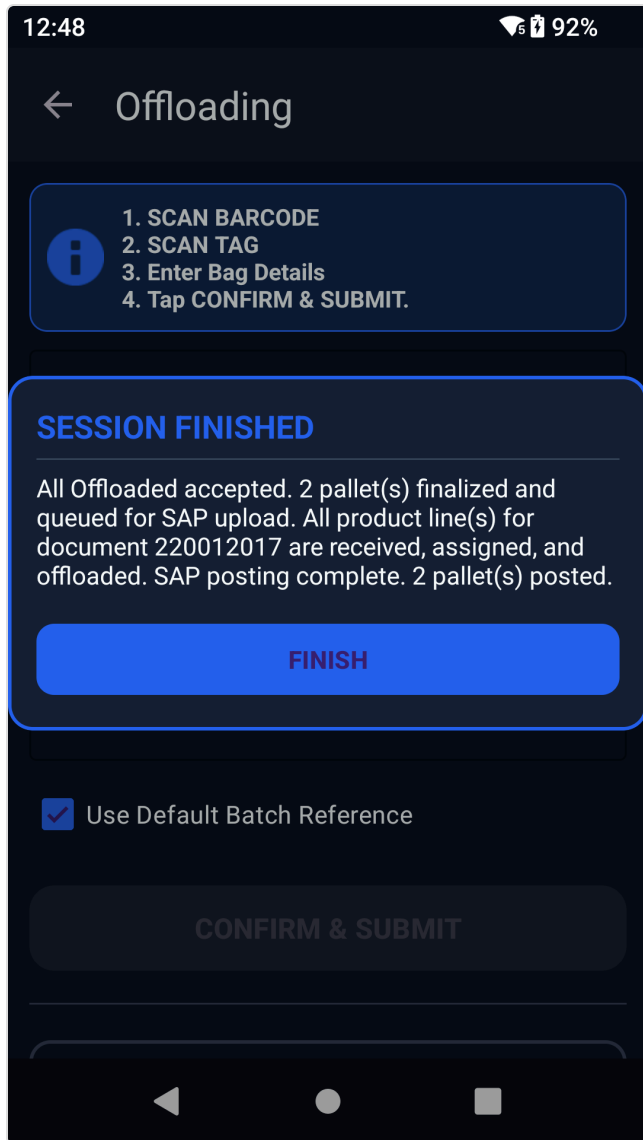


The **Session Finished** popup appears showing:

- Total pallets finalised
- SAP posting status (how many pallets were posted successfully)
- Any posting failures (if SAP was unreachable, failed records are queued for retry on Station 1)

Tap **FINISH** (or wait for it to auto-dismiss) to return to the dashboard.

Step 3. The dashboard resets to idle state.

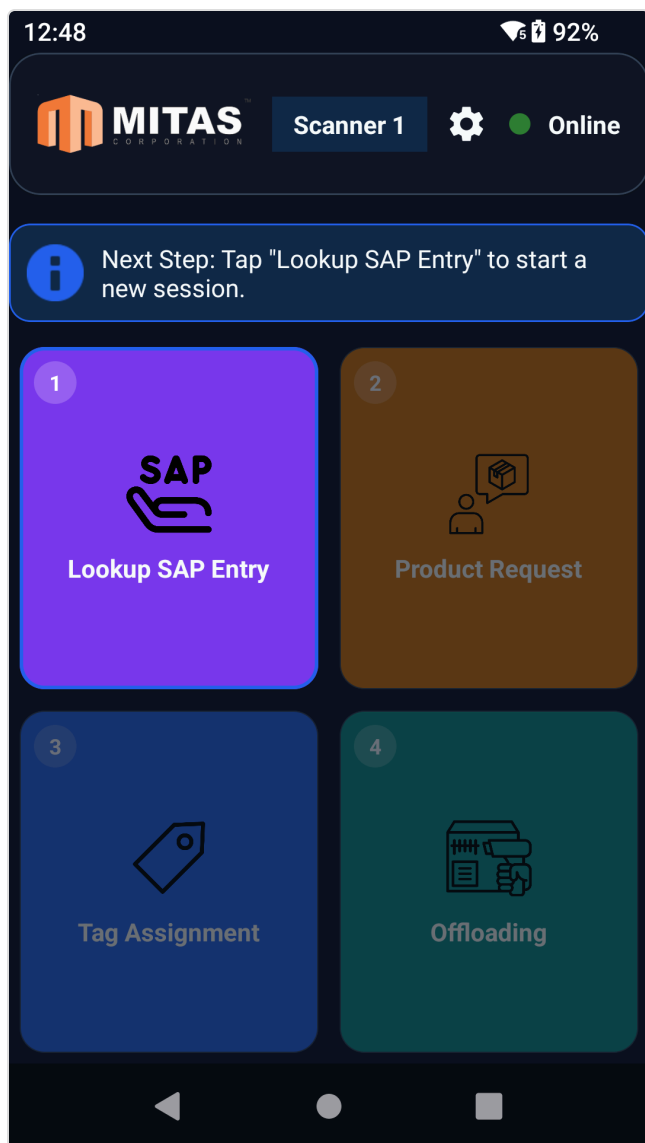

The Tag Assignment and Offload tiles return to their locked state. The operator can immediately start a new session by tapping **Lookup SAP Entry**.


> **SAP Posting Note:** If the session finished popup shows any failed postings, do not re-scan the pallets. Station 1 queues failed SAP posts and retries automatically. Contact your supervisor to confirm the SAP posting status in the Station 1 desktop app.

10. Error Messages & Recovery

Whenever an error occurs the app displays a **dismissible red popup** with a title (e.g. "Failed"), a description of what went wrong, and guidance on how to resolve it.

To dismiss an error popup, tap **DISMISS** or tap anywhere outside the popup.

10.1 SAP Lookup Failed

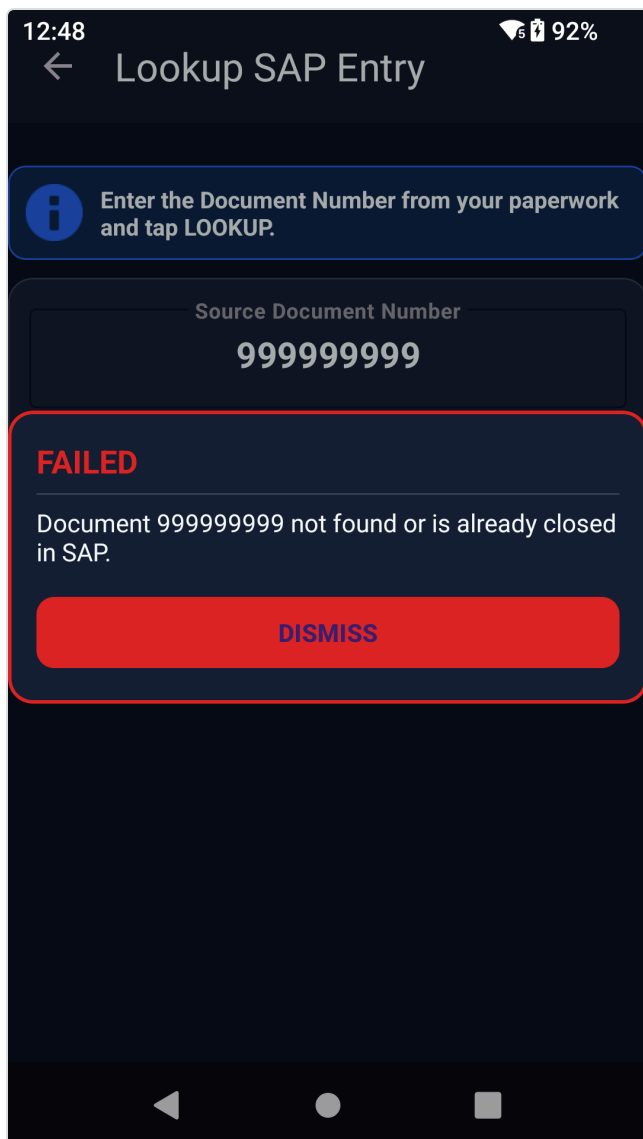


Message example: "Document 999999999 not found or is already closed in SAP."

Causes and resolutions:

Cause	Resolution	
-----	-----	
Document number entered incorrectly	Check the delivery note and re-enter the exact number	
Wrong document type selected	Ensure **Purchase Order** is selected for POs and **Transfer Request** for stock transfers	
SAP document is already closed / fully received	Ask your supervisor — the document may need to be re-opened in SAP	
SAP Business One is unreachable from Station 1	Contact IT; check that Station 1 PC has network access to the SAP server	
Station 1 desktop app is not running	Ask your supervisor to restart the Station 1 desktop app	

Tap **DISMISS** and correct the input before tapping **LOOKUP** again.

10.2 RFID Tag Assignment Failed

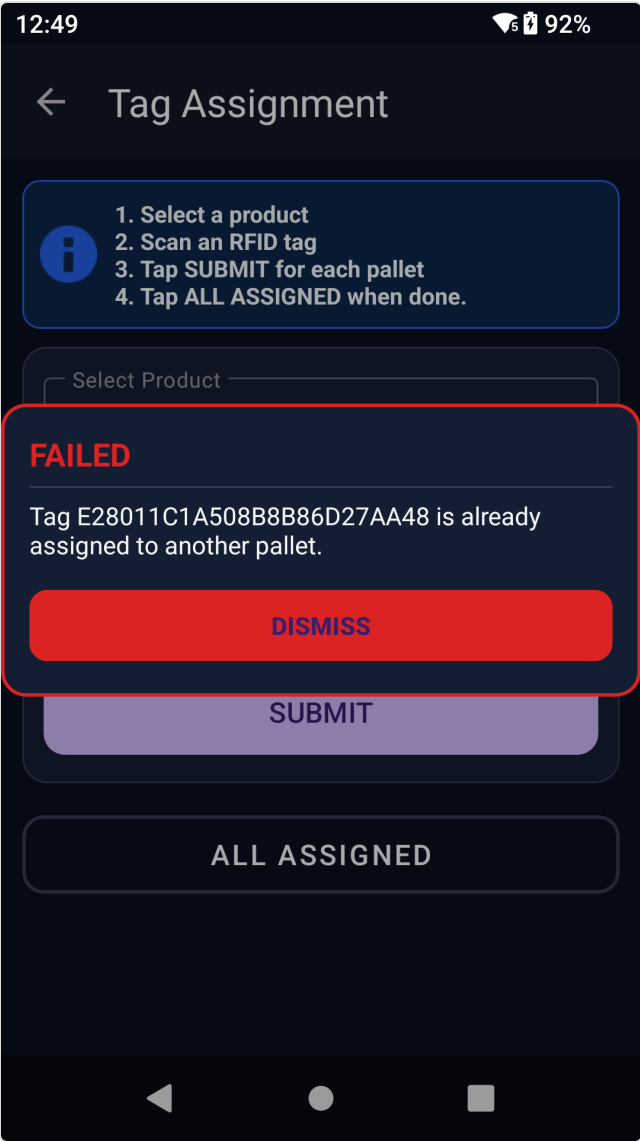


Message example: "Tag E28011C1A5... is already assigned to another pallet."

Causes and resolutions:

Cause	Resolution	
-----	-----	
Tag was already scanned earlier in this session	Check the assignment list — this pallet may already be registered	
Tag was left assigned from a previous session	Use **Unassign Mode** (Section 11) to free the tag, then retry	
Tag is physically damaged or unreadable	Replace the RFID tag and re-scan	
Scanner read an adjacent pallet's tag	Move other pallets away and retry, scanning only the intended pallet	

Tap **DISMISS** and retry with the correct tag.

10.3 Print All Failed

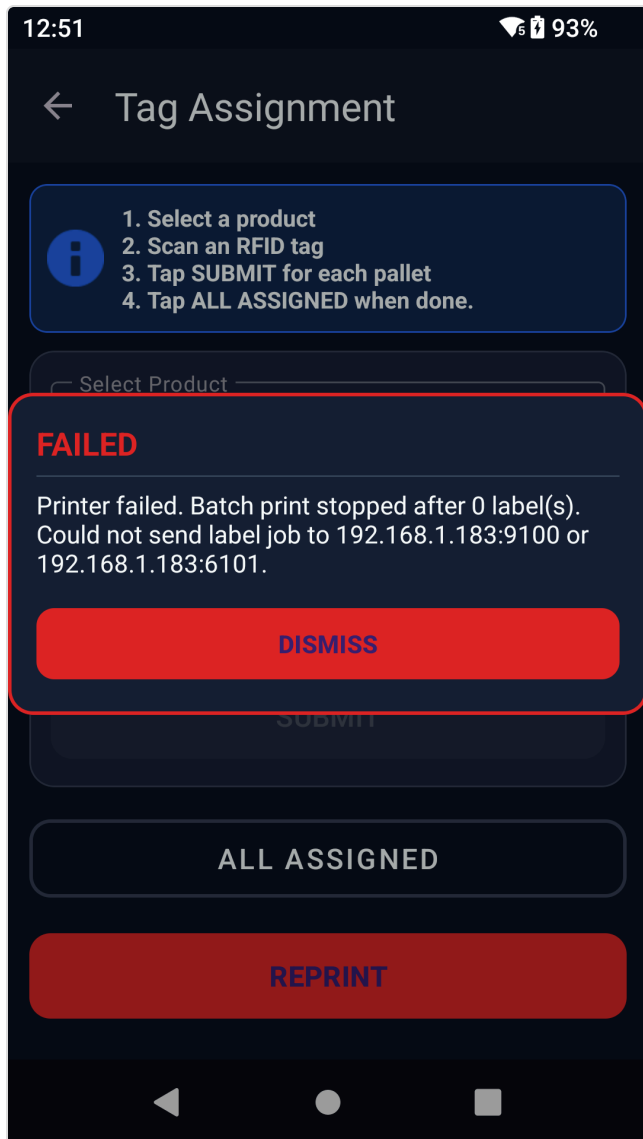


Message example: "Printer failed. Batch print stopped after 0 label(s). Could not send label job to 192.168.1.183:9100."

Causes and resolutions:

Cause	Resolution	
-----	-----	
Printer is powered off	Power on the TSC printer and wait for the green ready light	
Printer is out of label stock	Load a new roll of labels	
Printer is out of ribbon	Replace the ribbon (thermal transfer printers only)	
Printer IP unreachable on the network	Check the printer's network cable or Wi-Fi; contact IT if needed	
Print job was corrupted	Tap DISMISS; then use **REPRINT** if available, or contact your supervisor	

> **Important:** All pallets are already registered in Station 1 even if printing fails. Do not re-scan the RFID tags. Once the printer issue is resolved, use the REPRINT option on Station 1 to reprint the labels without re-doing the assignment.

10.4 Offload Failed

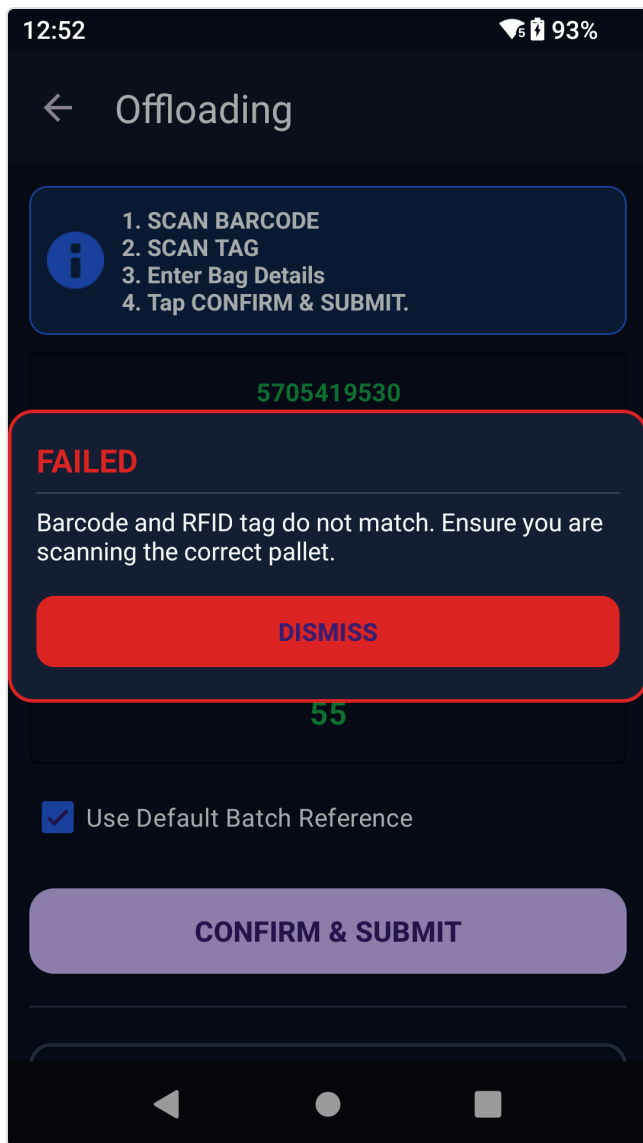

Message example: *"Barcode and RFID tag do not match. Ensure you are scanning the correct pallet."*

Causes and resolutions:

Cause	Resolution	
-----	-----	
Barcode and RFID tag scanned from different pallets	Re-scan both barcode and RFID tag from the **same** pallet	
Barcode label was placed on the wrong pallet	Identify the correct pallet for this barcode; use Reassign Mode if needed	
RFID tag was moved to a different pallet after printing	Use **Reassign Mode** (Section 12) to re-link the tag to the correct barcode	
Barcode is from a different session	Verify the delivery note; do not scan labels from a different truck	

Tap **DISMISS** and retry, ensuring both scans are from the same pallet.

11. Unassign Mode


Unassign Mode removes the link between an RFID tag and its pallet record in Station 1. Use this when a tag was scanned by mistake, needs to be reused, or is physically not on the expected pallet.

> This is a supervisor-level action. Unassigning a tag during an active session will prevent that pallet from being offloaded until the tag is re-assigned.

Accessing Unassign Mode


Step 1. From the dashboard, tap ⚙ **Settings** and enter the supervisor password.

Step 2. Scroll to the bottom of the Settings screen.

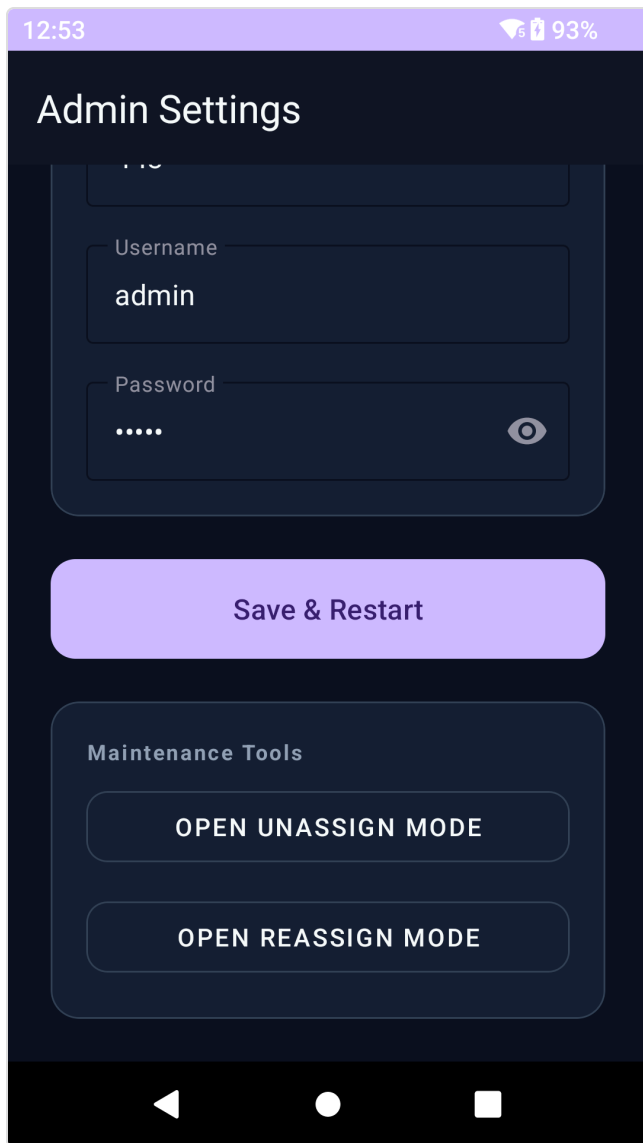

Step 3. Tap UNASSIGN MODE.


Using Unassign Mode

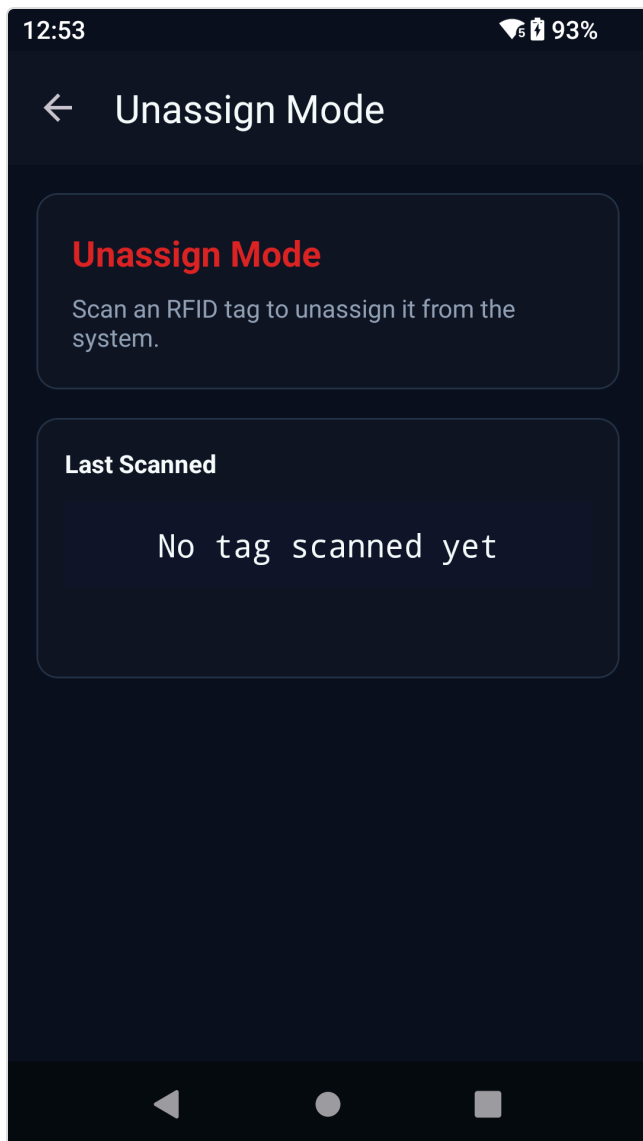

The Unassign Mode screen shows the last scanned tag ID (initially empty) and a status field.

Step 4. Scan the RFID tag you want to unassign by holding the scanner over the tag.

The tag ID populates automatically and the app **immediately sends the unassign request** to Station 1 — no SUBMIT button is required.

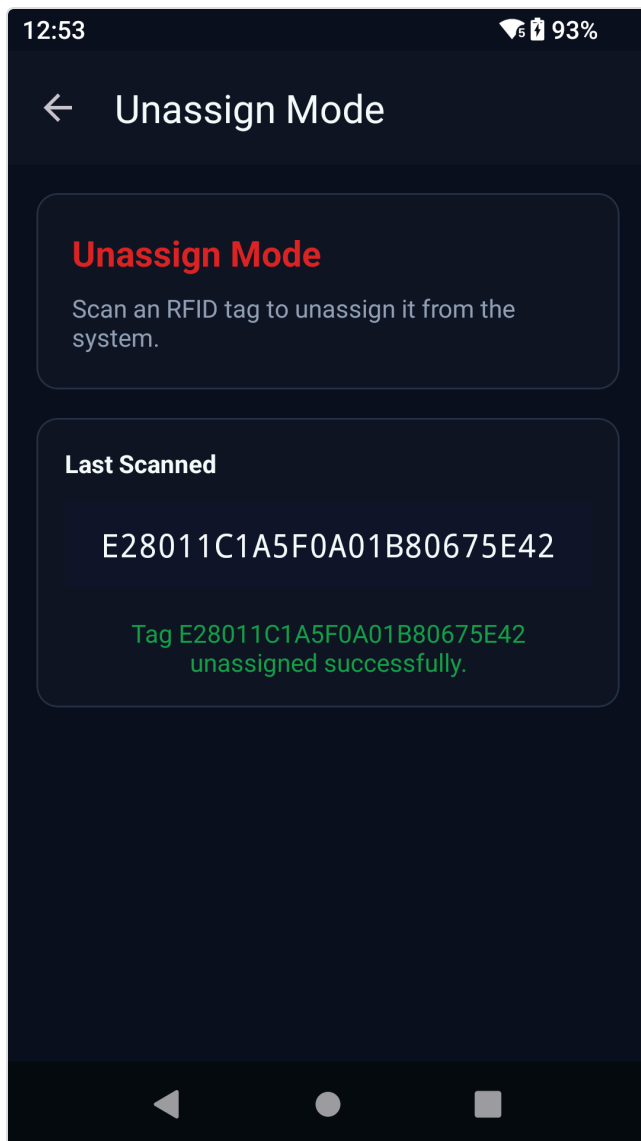

A green status message confirms: *"Tag [ID] unassigned successfully."*

The tag is now free to be re-assigned. Return to the Tag Assignment screen to re-scan it for the correct pallet.

Step 5. Tap the **back arrow** (←) to return to Settings, then back again to the Dashboard.

12. Reassign Mode


Reassign Mode moves an RFID tag from one pallet barcode to a different pallet barcode without creating a new pallet record. Use this when a tag was accidentally placed on the wrong pallet after labels were printed.

> This is a supervisor-level action. The destination barcode must belong to an existing pallet in an active session on Station 1.

Accessing Reassign Mode


Step 1. From the dashboard, tap ⚙ **Settings** and enter the supervisor password.

Step 2. Scroll to the bottom of the Settings screen.

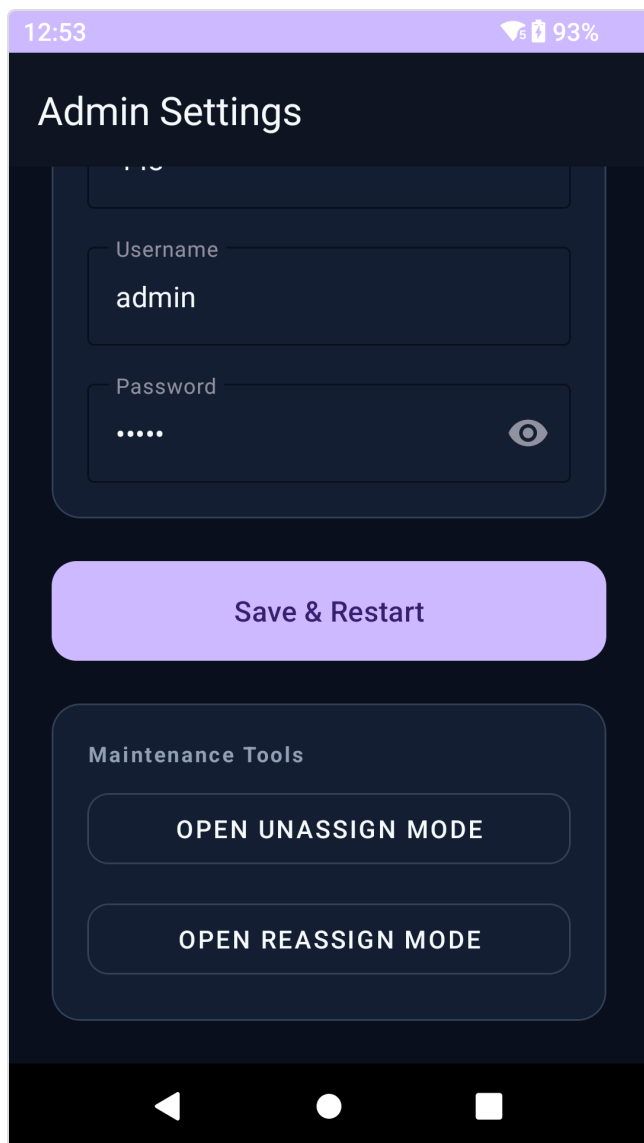

Step 3. Tap REASSIGN MODE.

Using Reassign Mode

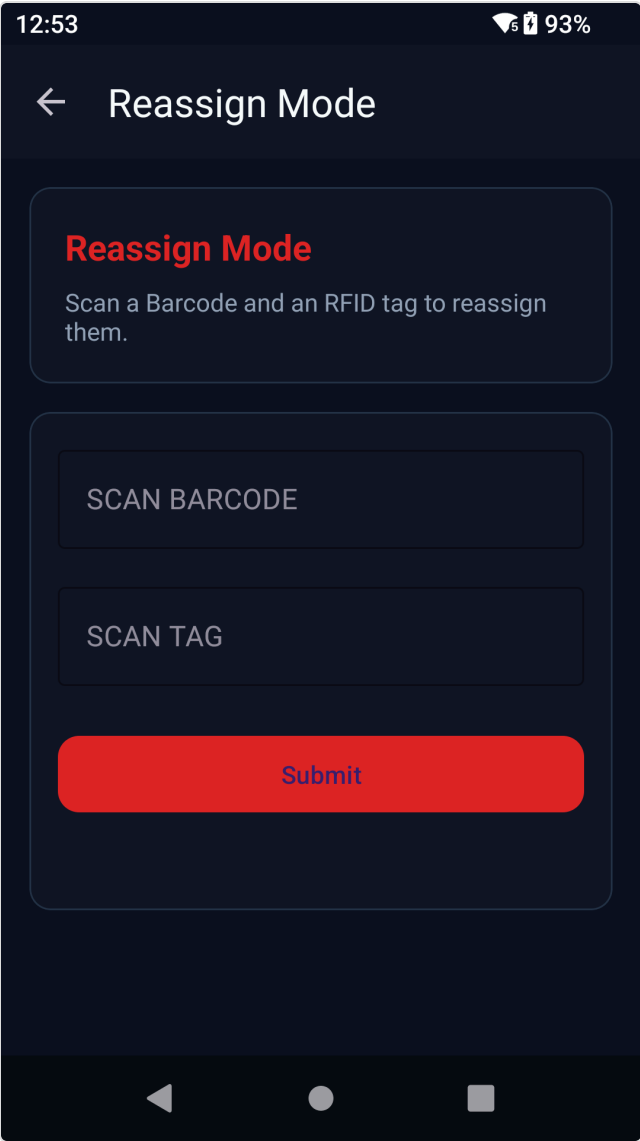

The Reassign Mode screen has two fields:

Field	Description	
-----	-----	
Barcode	The barcode of the **destination** pallet — the pallet you want the tag to be linked to	
RFID Tag	The RFID tag you want to move	

Step 4. Scan the **barcode** on the destination pallet label first.

Step 5. Scan the **RFID tag** to be moved.

12:53 93%

← Reassign Mode

Reassign Mode

Scan a Barcode and an RFID tag to reassign them.

SCAN BARCODE

1234567890


SCAN TAG

E28011C1A5EE20F5355C9A44

Submit

Both fields are now populated. Verify the values on screen match what you intended to reassign.

Step 6. Tap SUBMIT.

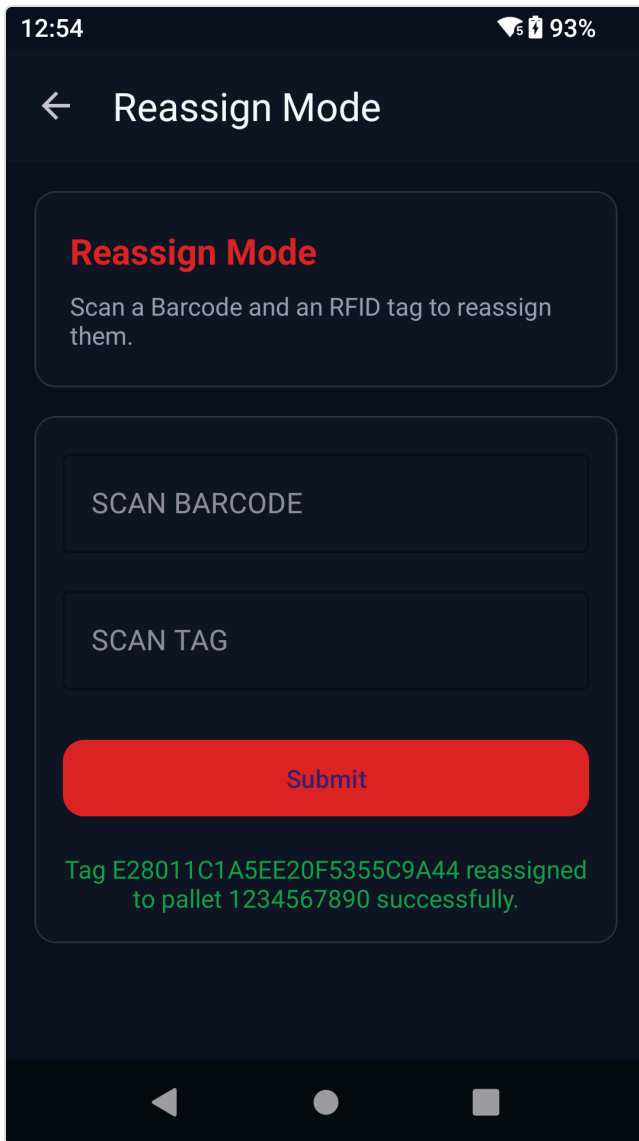

A green confirmation message appears: *"Tag [ID] reassigned to pallet [barcode] successfully."*

The RFID tag is now linked to the new barcode in Station 1. The pallet can now be offloaded using either the new barcode or the RFID tag.

Step 7. Tap the **back arrow** (←) to return to Settings, then back to the Dashboard.

13. Troubleshooting Quick Reference

Common Issues

Symptom	Likely Cause	Action	
-----	-----	-----	
MQTT dot stays red after launch	Wi-Fi disconnected or broker unreachable	Check Wi-Fi; contact IT	
Station offline overlay blocks the dashboard	Station 1 PC not running or MQTT broker offline	Ask supervisor to start Station 1	
SAP Lookup — "not found" error	Wrong document number or type	Re-check delivery note; correct and retry	
SAP Lookup — no response after 15 s	Station 1 PC unreachable or SAP server down	Contact supervisor/IT	
Tag assignment — "already assigned"	Tag was used in a previous or current session	Use Unassign Mode (Section 11) to free it	
Tag assignment — RFID field stays empty	Tag out of range or damaged	Move closer; replace damaged tag	
Print All — "Printer failed"	Printer offline, no labels, or wrong IP	Power cycle printer; contact IT for IP check	
Offload — "barcode and RFID do not match"	Wrong pallet scanned, or tag moved	Re-scan from same pallet; use Reassign if needed	
Session Finished — SAP failed count > 0	SAP unreachable at time of posting	Do not re-scan; Station 1 will retry automatically	
Settings — ACCESS button grayed out	Password field empty	Type the supervisor password first	

What Each Screen Requires

Screen	What you need	Common mistake	
-----	-----	-----	
SAP Lookup	Correct document number AND matching document type	Selecting PO when it is a Transfer Request	
Product Selection	At least one product ticked	Tapping REQUEST with nothing selected	
Tag Assignment	Physical RFID tag in scanner range	Tapping SUBMIT before the RFID field populates	
Offload	Barcode AND RFID from the **same** pallet	Scanning the label of pallet A and the tag of pallet B	

When to Contact Your Supervisor

- SAP lookup fails repeatedly with correct document number and type
- An RFID tag cannot be unassigned
- Print All fails and REPRINT does not resolve it
- Session Finished shows SAP posting failures
- Any screen shows an error not covered in Section 10

End of PPNAM-SOP-001