

# ABSTRACT

A machine is required when humans would like to work in different environmental conditions, such as toxic material, remote handling of bombs, health conditions, and sewage treatment. The paper aims to build a robot car that monitors the human voice's movement and senses distant objects. The L298N board, HC-05, Arduino Uno microcontroller, ultrasonic sensor, battery, and jumping wires are included in this system. The robot movement and control system is used by the speaker to allow the robot to react to any speaker command that gives any verbal instruction that produces sound frequencies of the human voice.

Voice control robot is just a practical example of controlling motions of a simple robot by giving daily used voice commands. In this system, an android app is used as a medium for the transmission of human commands to microcontroller. A controller can be interfaced with the Bluetooth module through the UART protocol. The speech is received by the android app and processed by the voice module. Voice is then converted to text. The microcontroller will further process this text, which will take suitable action to regulate the robot.

Through the software application, the user of a robotic car will choose the route or path to control the movement of the car. The user can monitor the robot's movements on his own smart device and allow the car to drive in his own way. In this method, a microcontroller with android devices is linked through a Bluetooth module to receive desired voice commands. The robot then escapes obstacles and detects distant objects.

The Hardware Development board used here is the mega Arduino board. The Software part is done in Arduino IDE using Embedded C. Hardware is implemented, and software porting is done. Generally, recognition of human voice using some kind of module cost way too much. After performing a sample amount of study on controlling robots, we came to the conclusion that yes, there exist a simple and very efficient way to manipulate robots through our voice.

The android application that is used to convert a voice to a text command and then transmit data to a microcontroller moves the robot via a voice application according to the user's command. After receiving the command, the robot moves in left, right, forward, and backward directions. This device tried to alert workers to the possibility of a terrorist attack in a military camp.

## **CONTENTS**

<b>TITLE</b>	<b>PAGE NO</b>
<b>I ABSTRACT</b>	<b>IV</b>
<b>II ABBREVIATIONS</b>	<b>IX</b>
<b>III LIST OF FIGURES</b>	<b>X-XI</b>
<b>IV LIST OF TABLES</b>	<b>XII</b>
<b>CHAPTER 1 INTRODUCTION</b>	<b>1-2</b>
1.1 INTRODUCTION	1
1.2 AIM OF THE PROJECT	1
1.3 SCOPES	2
1.4 METHODOLOGY	2
1.5 ORGANIZATION OF THE REPORT	2
<b>CHAPTER 2 SYSTEM REVIEW</b>	<b>3-7</b>
2.1 INTRODUCTION	3
2.2 BLOCK DIAGRAM	3
2.3 MICROPROCESSORS VS MICROCONTROLLER	4
2.4 BASIC DESCRIPTION OF CONTROLLER UNIT	5
2.5 DESCRIPTION OF MICRO CONTROLLER ATMEGA 328	5
2.6 DESCRIPTION OF BLOCK DIAGRAM	5
2.7 CIRCUIT DIAGRAM	5
2.8 WORKING PROCESS OF OUR CIRCUIT	6
2.9 LIST OF COMPONENTS USED IN CIRCUIT	6
2.10 CONCLUSION	7

<b>CHAPTER 3 COMPONENT DESCRIPTION</b>	<b>8-26</b>
3.1 INTRODUCTION	8
3.2 DESCRIPTION 2 BLUETOOTH MODULE	8
3.2.1 FEATURES OF BLUETOOTH MODULE HC-05	9
3.2.2 PIN DESCRIPTION OF HC-05	10
3.2.3 SUMMARY	11
3.3 BASIC DESCRIPTION OF ANDROID APPLICATION	11
3.3.1 VOICE APPLICATION	12
3.4 BASIC DESCRIPTION OF CONTROLLER UNIT	12
3.4.1 TECHNICAL SPECIFICATION OF ARDUINO UNO	13
3.4.2 DESCRIPTION OF MICRO CONTROLLER ATMEGA 328	14
3.4.3 BLOCK DIAGRAM OF MICRO CONTROLLER ATMEGA 328	15
3.4.4 PIN CONFIGURATION OF MICRO CONTROLLER ATMEGA 328	16
3.4.5 PIN DESCRIPTION	16
3.5 L298N MOTOR DRIVER	17
3.5.1 L298 CONNECTIONS	18
3.5.2 VOLTAGE SPECIFICATION	19
3.6 DESCRIPTION OF LCD DISPLAY 16x2	19
3.6.1 SHAPES AND SIZES	20
3.6.2 PIN DESCRIPTION	20
3.6.3 CONTROL LINES	21
3.6.4 INTIALIZATION BY INSTRUCTIONS	21
3.7 DC MOTOR	22
3.7.1 TYPE OF DC MOTOR	22
3.7.2 WORKING AND OPERATING PRINCIPLE OF DC MOTOR	22

3.8 BASIC ARDUINO SOFTWARE	24
3.8.1 FEATURES OF ARDUINO SOFTWARE	24
3.9 WIRES	24
3.10 POWER SUPPLY 12V	25
3.10.1 SPECIFICATIONS	25
3.11 COST ANALYSIS	25
3.11.1 COST SHEET	26
3.12 CONCLUSION	26
<b>CHAPTER 4 SOFTWARE ANALYSIS</b>	<b>27-29</b>
4.1 INTRODUCTION	27
4.2 DESCRIPTION OF OUR SOFTWARE	27
4.3 CONCLUSION	29
<b>CHAPTER 5 SCHEMATIC REPRESENTATION</b>	<b>30-34</b>
5.1 INTRODUCTION	30
5.2 SCHEMATIC DIAGRAM	30
5.2.1 CRYSTAL OSCILLATOR	32
5.2.2 RESISTOR	32
5.2.3 SWITCHES	33
5.2.4 MOTORS	33
5.2.5 LCD	33
5.2.6 MICROCONTROLLER	33
5.2.7 DRIVER MODULE	34
5.2.8 CHARGED BATTARIES	34
5.2.9 REGULATION	34
5.2.10 CONNECTING WIRES	34

5.3 CONCLUSION	34
<b>CHAPTER 6 RESULTS AND DISCUSSION</b>	<b>35-39</b>
6.1 INTRODUCTION	35
6.2 ASSEMBLING THE BOARD	35
6.2.1 ASSEMBLING THE PROCESS	36
6.2.2 COMPLETION OF ASSEMBLING PROCESS	37
6.3 ANDROID APPLICATION	37
6.3.1 BLUETOOTH SPP TEST	37
6.3.2 BLUETOOTH AMR(ANDROID MEETS ROBOT)	38
6.4 ROBOTS WORKING MECHANISM	38
6.5 TESTING	38
6.6 CONCLUSION	39
<b>CHAPTER 7 CONCLUSION</b>	<b>40-42</b>
7.1 APPLICATIONS	40
7.1.1 HOME AUTOMATION	40
7.1.2 WHEEL CHAIRS	40
7.1.3 SURVILLANCE DEVICE	41
7.1.4 MILITARY APPLICATIONS	41
7.1.5 INDUSTRIAL PURPOSE	41
7.2 ADVANTAGES	41
7.3 DISADVANTAGES	42
7.4 FUTURE SCOPE	42
<b>REFERENCES</b>	<b>43</b>

<b>ABBREVIATIONS</b>		
CPU	--	Central Processing Unit
SRC	--	Speech-recognition Circuit
APP	--	Application
RAM	--	Random Access Memory
ROM	--	Read only Memory
DSP	--	Digital Signal Processor
CMOS	--	Complementary Metal Oxide Semiconductor
RPS	--	Regulated Power Supply
AC	--	Alternate Current
DC	--	Direct Current
USB	--	Universal Serial Bus
LED	--	Light Emitting Diode
LCD	--	Liquid Crystal Display
IC	--	Integrated Circuit
ISP	--	In-System Programmable
UART	--	Universal Asynchronous Receiver and Transmitter
GND	--	Ground
TTL	--	Transistor Logic
RST	--	Reset
ALE	--	Address Latch Enable
PC	--	Program Counter
SFR	--	Special Function Registers
PAN	--	Personal Area Networks
GFSK	--	Gaussian frequency shift keying
SIG	--	Special Interest Group
ISM	--	Industrial, scientific and medical Band
EDR	--	- Enhanced Data Rate
AMR	--	Android meets robot

<b>LIST OF FIGURE</b>	<b>PAGE NO.</b>
Fig 2.1: Block diagram of voice control robot	04
Fig 2.3: Circuit Diagram	05
Fig 3.1: logo of Bluetooth	09
Fig 3.1.1 Bluetooth module	09
Fig 3.1.2: Pins of HC-05	10
Fig 3.2 Home page of android apps	12
Fig 3.3(a) Arduino Uno	13
Fig3.3(b) Arduino Uno	14
Fig 3.3.1 block diagram of microcontroller at mega	15
Fig3.3.2 Pin configurations of microcontroller	16
Fig3.4 L298N motor driver	17
Fig3.5 Schematic interface of l298N	18
Fig3.6 Lcd different model	20
Fig 3.7 Pin diagram of 1x16 line led	20
Fig3.8 Flow chart of installation	21
Fig3.9 Dc motor	22
Fig3.10 operating of Dc motor	23
Fig 3.11 Arduino software	24
Fig 3.11 (a) Female to male jumper wire (b) male to male jumper wires	24
Fig 3.13 12v power supply	25
Fig 4.1: Software platform	27
Fig 4.2: Compiling window	28
Fig 5.1: Circuit diagram	30
Fig 5.2: Crystal oscillator	32
Fig 6.1: Hardware board	35
Fig 6.2: Circuit Board	36

Fig 6.2.1 : Our Project	37
Fig 7.2: Wheelchair Applications	40
Fig 7.4: Military Applications	41



<b>LIST OF TABLE</b>	
Table 3.1.3: Hc-05 pin description	10
Table 3.2: Arduino short description	13
Table 3.3:L298N driver pin specification	18
Table 3.4: L298N driver voltage specification	19
Table 3.5 address location of 1x16 line led	19
Table 3.6 Pin description of lcd	21
Table 6.1: TESTING RESULTS	38

# **CHAPTER 1**

## **INTRODUCTION**

### **1.1 INTRODUCTION**

Mainly it behaves to be a fancy soul to raise about machine which believe like as humans. Recognizing the speech and respondent consequently may be a crucial a part of this fancy. Including the enhancements of the terminology and exploration on spurious rational, this fancy turn real comparatively. This project aim get an important role for contribute the fancy. Dominant the device and atmosphere including oration create mortal life easiest and lightest. The project maybe an easy shaping of this refuge. Those voice is received by the arm which processes and send to the robot for final output. Basically speech used to way of the people. Under the developments of communicate technologies within the last period, that the speech begin to be an important for many ways. More than used raised finally several interfaces, speech is simply to communication with computers.

### **1.2 AIM OF THE PROJECT**

Robots are Fundamental in different manufacturing industries. Because is that cost per hour to control a robot is a fracture of the cost of the human labor needed to perform the identical deed. Over this, at one time programmed, robots often acts as duty including a sublime validity that conquer which the foremost knowledgeable mortal operator. Nowadays maximum moving robots can forced be “dinosaurs. “The robots are in the infancy stage to their evolution, that the robot they are going to be a lots of versatile, emulating the human capability and abilities to exchange jobs task easily. Whatever the owner computer has been create an indelible mark on society. Robots need a mix of components to be effective. While not risking human life or limb, robots will exchange mortal.

Whatever dangerous labor work. Robots will perform in every kinds of impure environments, chemical likewise as nuclear. They also perform so dangerous which a bounded mortal will be soon died.

## **1.3 SCOPES**

1. Robot used in industry system project to make easy daily life works through robot.
2. It can be used commercially in industries.
3. Portable android application to use it frequently in hand.
4. Nowadays Bluetooth technologies that's can be used in without wire connection for cellular phones and used in this project technology. This technology gives us in different efficient for controlled robot simply

## **1.4 METHODOLOGY**

This system is used to control all the robot hardware that connected to the microcontroller. The methodology of the proposed system is mainly divided into the three steps. In the initial step an android application interfaces with the Bluetooth module. After that in second step microcontroller receives the signal which has been send by the Bluetooth module. Then microcontroller sends the activation signal to the motor driver module. In the last step driver module switches the devices that connected to the robot

## **1.5 ORGANIZATION OF THE REPORT**

This project report has seven chapters in total. The first chapter describes an idea about our project “Bluetooth Control Home Automation”, Brief description of the project, scopes and methodology.

The second chapter about history, block diagram, circuit diagram, list of components. The chapter third about component description, cost analysis of our system. The chapter fourth software analysis & program explanation. The chapter five hardware implementation. Then chapter six describes result & discussion properly. Finally, chapter seven gives the concluding remarks, limitation of our system and suggestion for the future works.

## **CHAPTER 2**


### **SYSTEM REVIEW**

#### **2.1 INTRODUCTION**

The voice control robot system allows people to control robot by using a smart phone application. It is necessary to look on hardware and user's smart phone software for developing a voice control robot. The can deal with many application such as industry, automation house, restaurant security, and toy for kids etc. In this chapter we will discuss about Bluetooth module (HC-05), and Arduino UNO, 'voice control robot system' apps, Arduino compiler, Block diagram & circuit diagram of our System.

#### **2.2 BLOCK DIAGRAM**

The block diagram is a way in which the principle parts are presented under blocks connect with the lines which showed the relationship of these ways. These are deeply used in engineering whole world its hardware graph, electronic design, software digraph and diagram. The block diagrams rely on the ethics of the black box which the article are mystic from sight either to eliminate being distracted by the details are not well known. Also know that which goes inland goes out but we cannot see how it works.

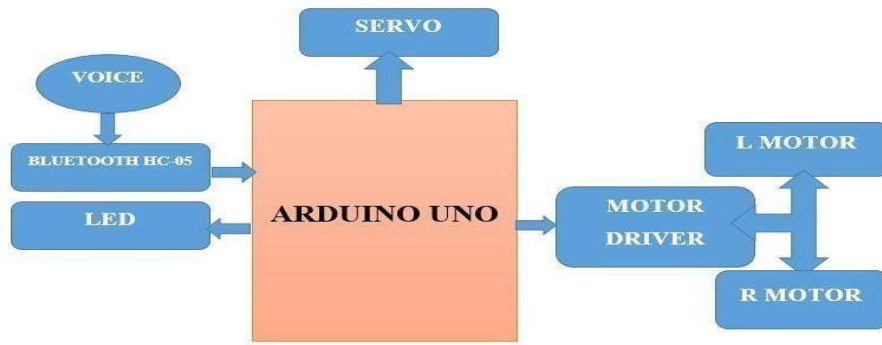

**Fig 2.1: Block diagram of voice control robot**

## **2.3 MICROPROCESSORS vs MICROCONTROLLERS:**

- Microprocessor which contains ALU (Arithmetic Logic Unit).
- Other hand Microcontroller contains ALU (Arithmetic Logic Unit), CU (Central Unit) and registers.
- Microprocessor has no internal memory otherwise microcontroller contains internal memory.
- Microprocessors used for purpose applications but Microcontroller used for specific purpose applications.
- Microprocessor which no circuits, timer and counters but Microcontroller which contains interfacing circuits, timer and counters.


## 2.4 BASIC DESCRIPTION OF CONTROLLER UNIT:

In using controller unit we used Arduino hardware board with the AVR microcontroller. Basically it will be a single chip of microcontroller which include all components of microcontroller. Across the aiding of Arduino 1.6.8 software chip form we performance freely ordered for AVR-IC. Arduino which is an open-source electronics prototyping stage based on supple, glib-to-conduct hardware and software. It's intended for mechanic, planner, hobbyists, and anyone loving in forming interactive purpose or environments. Using The microcontroller on these board is programmed behave the Arduino programming language (based on Wiring) and the Arduino development environment (based on Processing). It stands the requirements instruments which needed in a microcontroller, usually it will be connect to computer USB cable with AC-DC adapter or battery to get started.

## 2.6 BLOCK DIAGRAM DESCRIPTION:

The block diagram of voice control robot system as shown in fig.2.1, using the Arduino UNO, we can operate the Bluetooth module, motor driver. When the dedicated command is available, then Bluetooth module (HC-05) sends a digital output to control unit. At this time the control units (Arduino UNO) will send commands to motor driver to move robot with desire programming.

## 2.7 CIRCUIT DIAGRAM

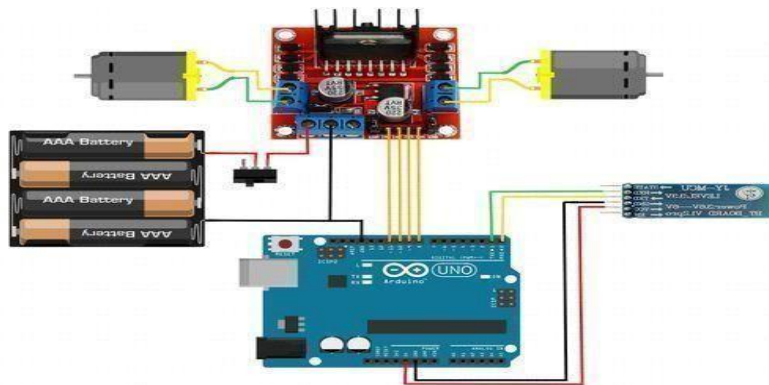

**Fig.2.3: Circuit diagram**

## 2.8 WORKING PROCESS OF OUR CIRCUIT:

This project the Bluetooth control voice activated robot project which called voice controlled robot. These application mainly controls the specific commands to prepare to our robot. In time when toggle buttons are pressed these specific commands are passed by the voice apps and that's command we get a execute output for robot. The software Arduino which finds out the signal was sent and compares it to the predefined for signal assigned for all application. Then it looking for active the motor from identifies that signal which passing by 5v. Then the motor driver is on and from specific command the motor driver is turned to move the robot.

## 2.9 LIST OF COMPONENTS USED IN CIRCUIT:

0N o	Component Name	Quantity	Used
01	Bluetooth Module (HC-05)	01	To direct communication.
02	Microcontroller:- ATmega328P(Arduino UNO)	01	To Control the System.
03	Motor driver	01	To run robot
04	Arduino compiler		To compile code.
04	Amr voice Apps	01	To giving command.
06	12v battery	02	Power Supply
07	Wires	19	To connection.
09	Led	03	Fabrication
10	Servo & sonar sensor	1+1	Rotate head
11	Sonar sensor	1	Giving eye shape

## **2.10 CONCLUSION**

The voice control robot which used in many applications because of its desirable properties like homes, hostels, industries, vehicles, toy for children, playing device for mature kids. Open source robot practice and many more.



## **CHAPTER 3**

### **COMPONENT DESCRIPTION**

#### **3.1 INTRODUCTION**

System hardware design composed of Arduino Uno, L298N motor driver module, Servo motor sg90, ultrasonic sensor for fabrication, 16x2 lcd, display, DC motor Bluetooth Module (HC-05), Some Wires, Arduino compiler, Android apps and obviously with power supply. In this chapter we will discuss about component description, features, working procedure and cost analysis of our all component.

#### **3.2 DESCRIPTION OF BLUETOOTH MODULE (HC-05)**

Recently everything goes to wireless such as phones computers, game controller, consoles and many other. Without wire technologies has allowed us to use electronic device with unbounded freedom to use without many others problem. Nowadays there are many types of wireless connectivity like as Wi-Fi, cellular information, ZigBee and the most well –liked and wide used wireless pools using Bluetooth. The 5 standard Bluetooth was announced the year in 2016 and looking the Bluetooth 4.2 standard is commonly used this moment.

In our project using HC-05 model of Bluetooth module which is easy to use and setup. The HC-05 which is used in a master of of slave configuration to do great solution and grat a smooth output for a great communication.



**Fig. 3.1.1: Bluetooth Module (HC-05)**

### **3.2.1 FEATURES OF BLUETOOTH MODULE (HC-05):**


#### **Hardware Features**

- Typical 80dBm sensitivity.
- Up to +4dBm RF transmit power.
- 3.3 To 5v I-O.
- PIO that's means Programmable I-O Control.
- With integrated antenna.
- With edge connector.

#### **Software Features**

- Slave default Baud rate: 9600, Data bits: 8, Stop bit: 1, Parity: No parity.
- Auto-connect to the last device on power as default.
- Permit pairing device to connect as default.

### 3.2.2 PIN DESCRIPTION OF HC-05:

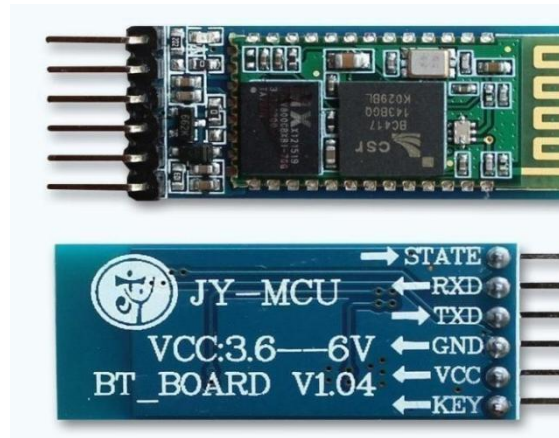

**Fig 3.1.2: Pins of HC-05**

Sl.		Pin Name	Description
1.		+5V or 3.3V	+5V supply or Power Pin.
2.		TX	The Data/Command to be transmitted is sent through this pin.
3.		RX	The Received data is read from this pin.
4.		KEY/EN	Input pin, which alters module between the Data mode and the AT Command mode.
5.		STATE	Output pin, the state of the module is indicated through this pin.
6.		GROUND	0V / GND or Power Pin

**Table: 3.1.3: HC-05 pin description**

### **3.2.3 SUMMARY:**

In the end this is a very good device to use in home or industry. This is a low cost project so that it is very cost effective and efficient. In short term uses of communication it is better than other wireless communication.

## **3.3 BASIC DESCRIPTION OF ANDROID APPLICATION:**

An associate degree droid app may be a code application running on the robot platform. As a result of the robot platform is constructed for mobile devices, a typical robot app is meant for a smartphone or a pill laptop running on the robot OS. Though associate degree robot app square measure usually created on the market by developers through their websites, most robot apps square measure uploaded and printed on the robot Market, an online store dedicated to those applications. The robot Market options every free and priced apps. Robot apps square measure written within the Java programing language and use Java core libraries. They're first compiled to Dalvi possible to run on the Dalvi virtual machine, which can be a virtual machine specially designed for mobile devices.

### 3.1.1 VOICE APPLICATION:



**Fig 3.2: Arm voice Android Apps.**

## 3.4 BASIC DESCRIPTION OF CONTROLLER UNIT:

The controlled we are used in radio hardware board with AVR microcontroller. This time with the help of Arduino 1.6.8 plate from we can easily create a programmer IC, Arduino is an open source electronic platform based on flexible which to easy hardware software. The Arduino UNO is mainly a microcontroller single chip which has 14 digital input output pin that's contains 6 PWM and 6 are analog pins, All are requirements instruments are involved the Arduino which are controlled a microcontroller. There are also a USB connector and a reset button and 6 MHz oscillator a power jacket all are include it.

### 3.4.1 TECHNICALSPECIFICATION ARDUINOUNO




**Fig 3.3: Arduino UNO.**

Microcontroller	ATmega328
Operating Voltage	5V
Supply Voltage (recommended)	7-12V
Analog Input Pins	6
DC Current per I/O Pin	40 Ma
DC Current for 3.3V Pin	50 mA
SRAM	2 KB (ATmega328)

**Table 3.2 Arduino Short Description**


### 3.4.2 DESCRIPTION OF MICROCONTROLLER: ATMEGA328:

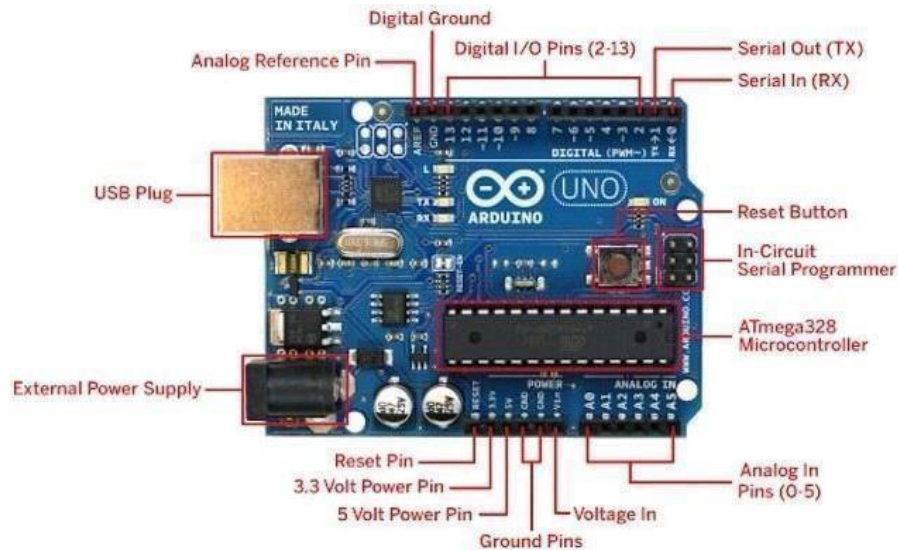

**Fig 3.3(b): Arduino UNO**

The Arduino Uno may be a microcontroller board supported the ATmega328 (datasheet). it's fourteen digital input/output pins (of that half dozen will be used as PWM outputs), half dozen analog inputs, a sixteen megahertz oscillator, a USB association, an influence jack, Associate in Nursing ICSP header, and a push. It contains everything required to support the microcontroller; merely connect it to a laptop with a USB cable or power it with Associate in Nursing AC-to-DC adapter or battery to urge started.

### 3.4.3 BLOCK DIAGRAM OF MICROCONTROLLER – (ATMEGA328):

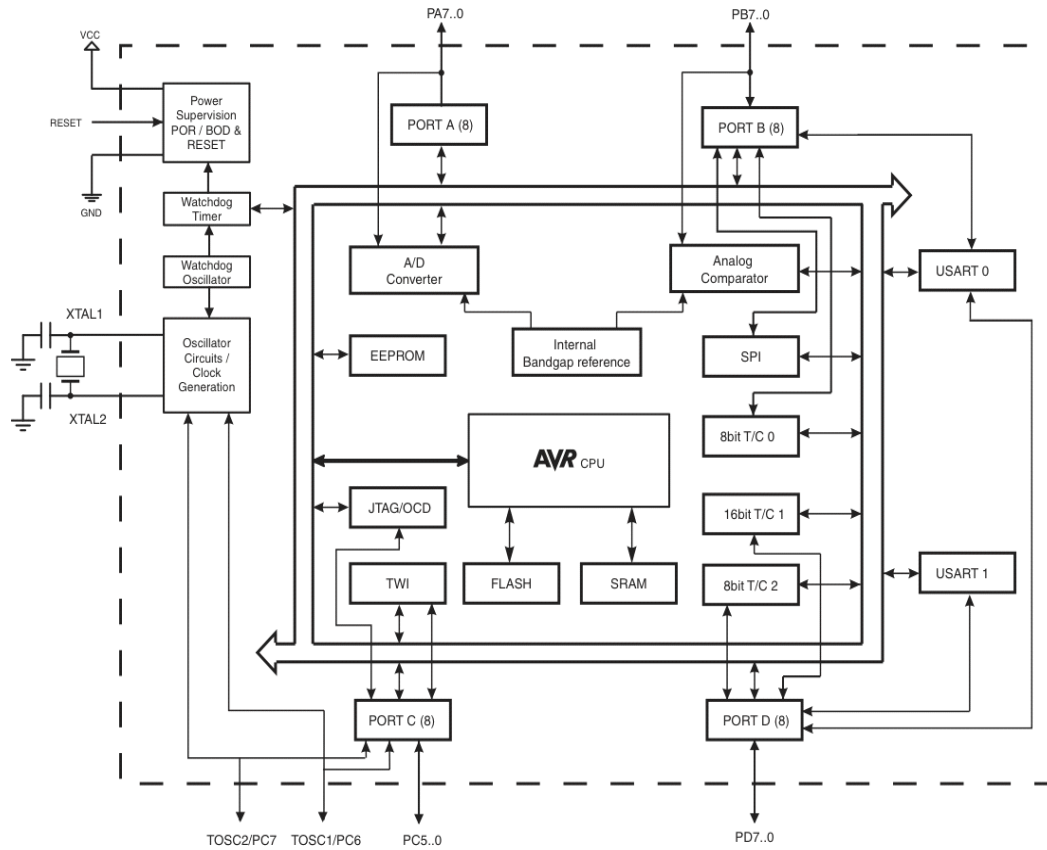

**Fig. 3.3.1: Block Diagram of Microcontroller – (Atmega328)**



### 3.4.4 PIN CONFIGURATIONS OF MICROCONTROLLER – (ATMEGA328):

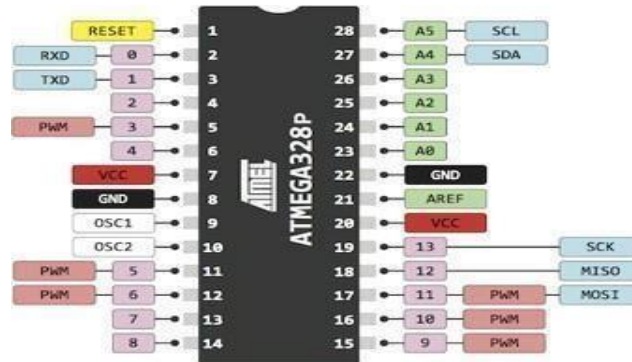


Fig. 3.3.2: Pin Configurations of Microcontroller – (Atmega328)

### 3.4.5 PIN DESCRIPTIONS:

The below gives a description for each of the pins, along with their function:-

**These pins are as follows:**

- **VIN:** This pin basically input voltage to the Arduino board when it is using an external power source.
- **5V:** This time used power supply to the microcontroller and other components in these board.
- **3V3:** The 3.3 voltage supplies generate under the on-board regulator. This time maximum 50mA current flowed.
- **GND:** Ground pins generated.

**There are a couple of other pins on the board:**


- **AREF:** Reference voltage for the analog inputs. Used with analog Reference.

- **Reset:** Bring this line LOW to reset the microcontroller. Typically used to add a reset button to shields which block the one on the board.

**Memory:** The At mega 328 has 32 Kb of flash memory for storing code which 0.5 KB is used for the bootloader and 2 KB of SRAM and 1 KB of EEPROM which also be read and written with the EEPROM library.


### 3.5 L298N MOTOR DRIVER

L298N is a dual H-bridge motor driver. Motor drivers act as current amplifiers since they take a low-current control signal and supply a higher-current signal. This higher current signal is employed to drive the motors. L2938 contains 2 inherent H-bridge driver circuits. In its common mode of operation, 2 DC motors can be driven at the same time, each in forward and reverse direction. The motor operations of two motors can be controlled by input logic at pins 2 & 7 and 10 & 15. Input logic 00 or 11 will stop the corresponding motor. Logic 01 and 10 will rotate it in clockwise and anticlockwise directions, respectively.

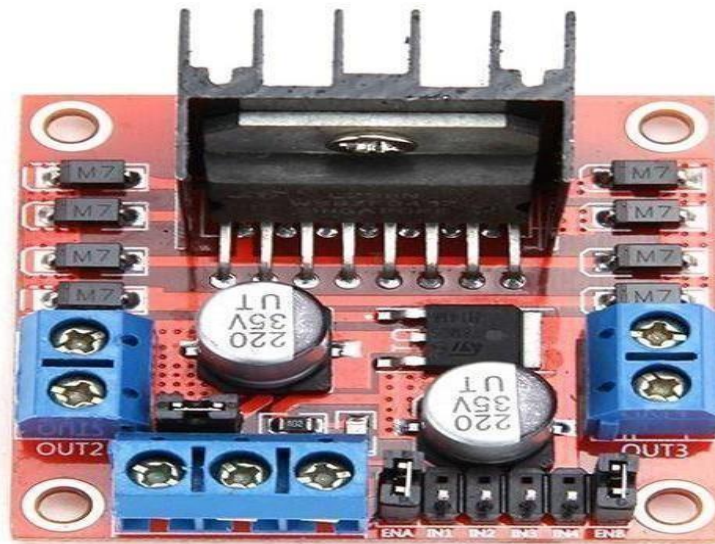

**Fig 3.4: L298N Motor Driver**

Enable pins ENA and ENB (corresponding to the two motors) must be high for motors to start operating. A simple schematic for interfacing a DC motor using L298N is shown below.

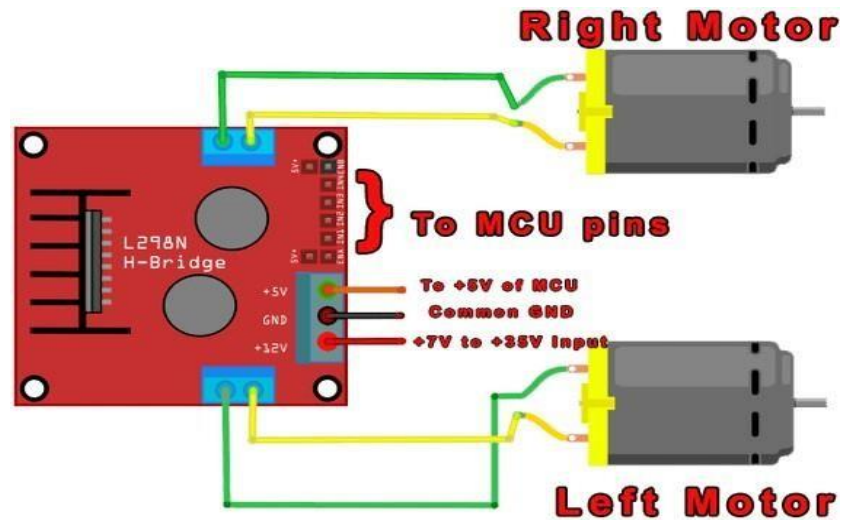

**Fig 3.5: Schematic Interfacing of the L298N.**

### 3.5.1 L298N CONNECTIONS

The circuit shown to the right is the most basic implementation of L298N motor driver. If we see the L298N motor driver pins and we have to understand the functionality of each pin before implementing this in a circuit.

MW.15	PowerSO	Name	Function
1;15	2;19	Sense A; Sense B	Between this pin and ground is connected the sense resistor to control the current of the load.
2;3	4;5	Out 1; Out 2	Outputs of the Bridge A; the current that flows through the load connected between these two pins is monitored at pin 1.
4	6	V <sub>S</sub>	Supply Voltage for the Power Output Stages. A non-inductive 100nF capacitor must be connected between this pin and ground.
5;7	7;9	Input 1; Input 2	TTL Compatible Inputs of the Bridge A.
6;11	8;14	Enable A; Enable B	TTL Compatible Enable Input: the L state disables the bridge A (enable A) and/or the bridge B (enable B).
8	1,10,11,20	GND	Ground.
9	12	VSS	Supply Voltage for the Logic Blocks. A100nF capacitor must be connected between this pin and ground.
10; 12	13;15	Input 3; Input 4	TTL Compatible Inputs of the Bridge B.
13; 14	16;17	Out 3; Out 4	Outputs of the Bridge B. The current that flows through the load connected between these two pins is monitored at pin 15.
—	3;18	N.C.	Not Connected

**Table 3.3 L298N driver pin specification**

### 3.5.2 VOLTAGE SPECIFICATION

Symbol	Parameter	Value	Unit
$V_S$	Power Supply	50	V
$V_{SS}$	Logic Supply Voltage	7	V
$V_i, V_{en}$	Input and Enable Voltage	-0.3 to 7	V
$I_o$	Peak Output Current (each Channel) – Non Repetitive ( $t = 100\mu s$ ) – Repetitive (80% on –20% off; $t_{on} = 10ms$ ) – DC Operation	3 2.5 2	A A A
$V_{sens}$	Sensing Voltage	-1 to 2.3	V
$P_{tot}$	Total Power Dissipation ( $T_{case} = 75^\circ C$ )	25	W
$T_{op}$	Junction Operating Temperature	-25 to 130	$^\circ C$
$T_{stg}, T_j$	Storage and Junction Temperature	-40 to 150	$^\circ C$

**Table 3.4 L298N driver voltage specification**

### 3.6 : DESCRIPTION OF LCD DISPLAY 16x2

Using the LCD (Liquid Crystal Display) is a thin which is flat and made of any number of color or monochrome pixels in front of a source of light or reflector. Every pixel consists of a column of liquid crystal molecules suspended between two transparent electrodes, and two polarizing filters, the axes of polarity of which are perpendicular to each other. For 16x1 LCD, the address locations are:

POSITION		1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
ADDRESS	LINE1	00	01	02	03	04	05	06	07	40	41	42	43	44	45	46	47

**Table 3.5: Address locations for a 1x16 line LCD**

### 3.6.1 SHAPES AND SIZES:

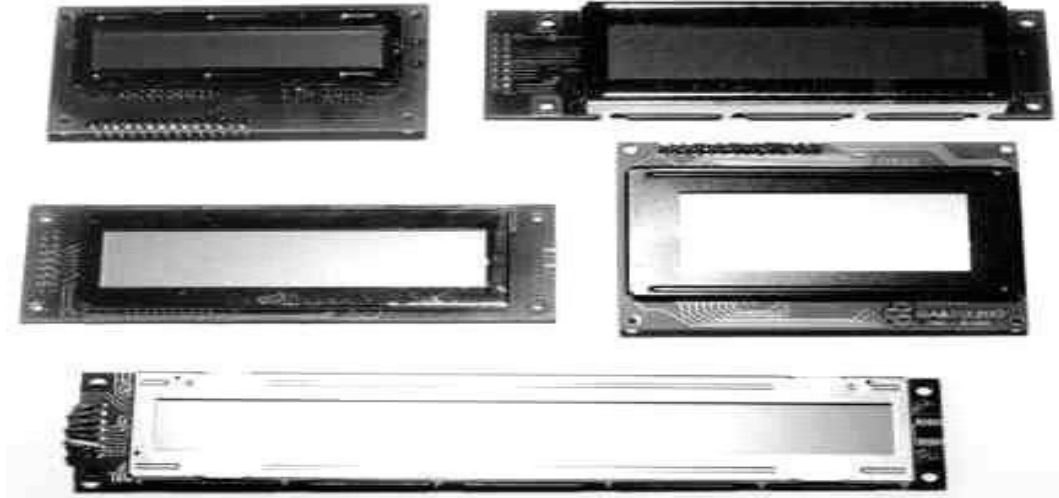


Fig 3.6: LCD Different Models.

### 3.6.2 PIN DESCRIPTION:

Most LCDs with 1 controller has 14 Pins and LCDs with 2 controller has 16 Pins (two pins are extra in both for back-light LED connections).


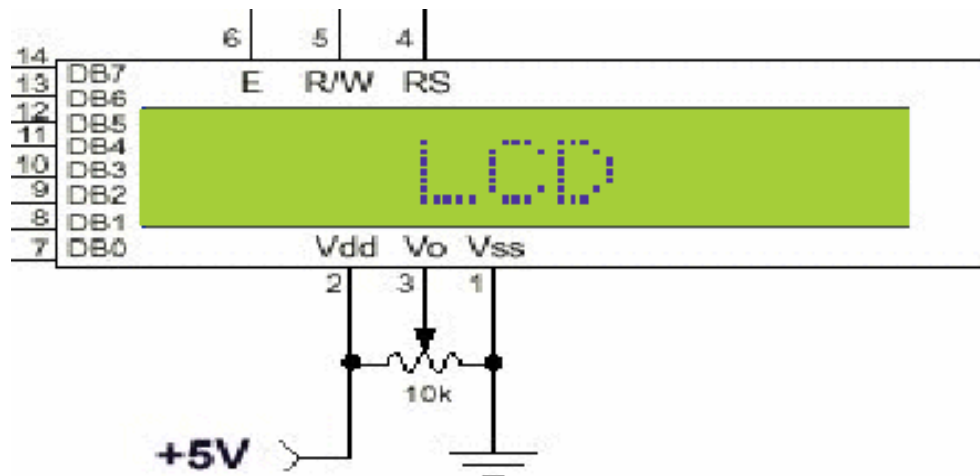


Fig 3.7: Pin Diagram of 1x16 lines LCD

PIN	SYMBOL	FUNCTION
1	Vss	Power Supply(GND)
2	Vdd	Power Supply(+5V)
3	Vo	Contrast Adjust
4	RS	Instruction/Data Register Select
5	R/W	Data Bus Line
6	E	Enable Signal
7-14	DB0-DB7	Data Bus Line
15	A	Power Supply for LED B/L(+)
16	K	Power Supply for LED B/L(-)

**Table 3.6: Pin Description of LCD**

### 3.6.4. INITIALIZATION BY INSTRUCTIONS:

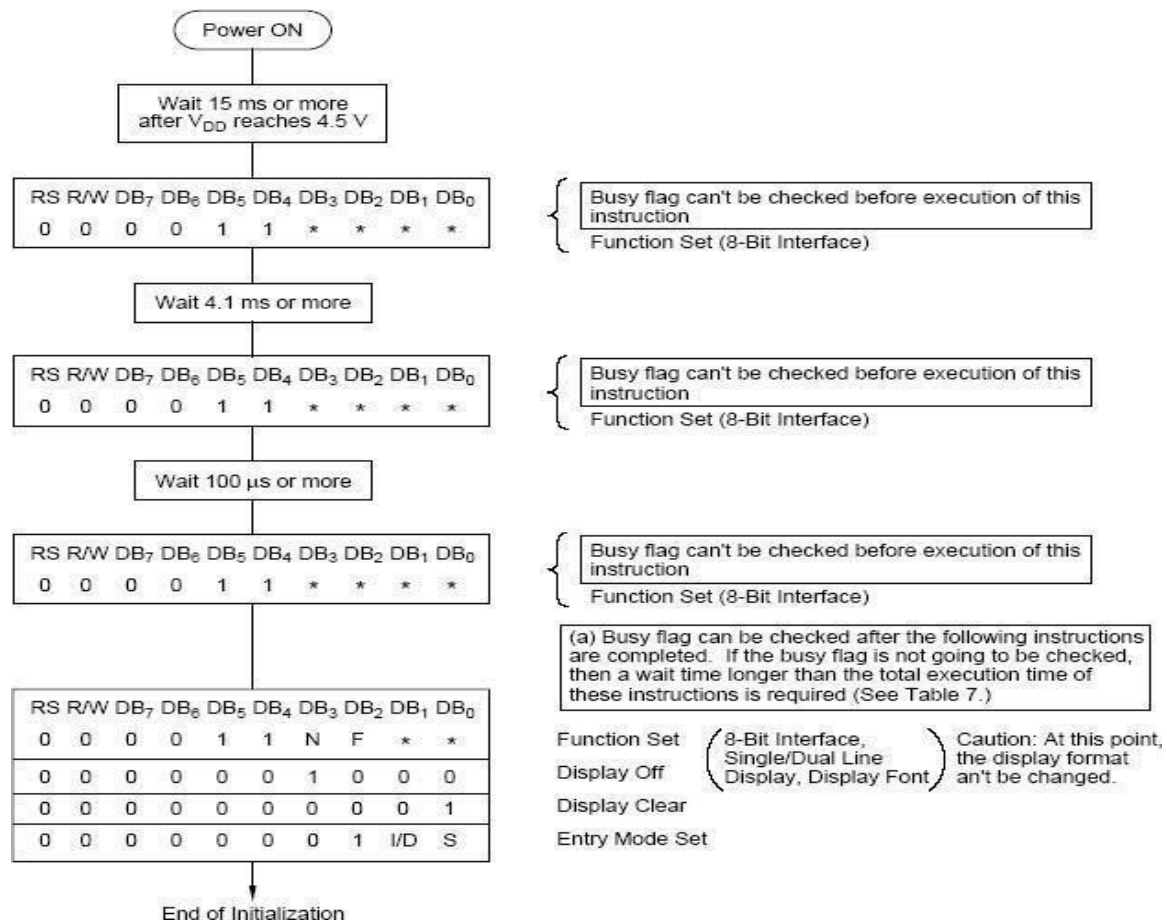

**Fig 3.8.: Flow Chart of Installation**

## 3.7 DC MOTOR

A DC motor is intended to run on DC wattage. 2 samples of pure DC styles square measure archangel Faraday's homoploid motor (which is uncommon), and also the ball bear in motor, that is (so far) a novelty. far and away the foremost common DC motor sports square measure the brushed and brushless sorts, that use internal associate degreed external commutation severally to make an periodic AC current from the DC supply -- so that they don't seem to be strictly DC machines during a strict sense.




**Fig 3.9: DC Motor.**

### 3.7.1 TYPES OF DCMOTORS

- Brushed DC Motors
- Brushless DC motors
- Coreless DC motors


### 3.7.2 WORKING OR OPERATING PRINCIPLE OF DC MOTOR

A dc motor simple words is a device that converts direct current (electrical energy) into mechanical energy. The very basic construction contains a current carrying armature which is connected to the supply end through commutator segments and brushes and placed within the north south poles of a permanent or an electro-magnet as shown in the diagram below.

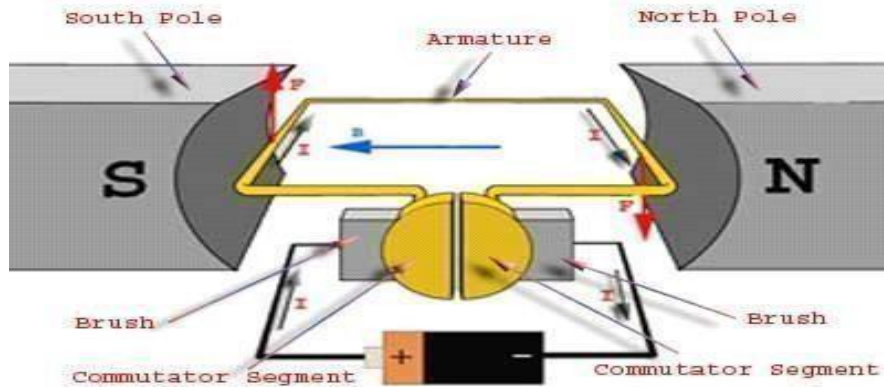

**Fig 3.10: Operation of DC Motor.**

For clear understanding the principle of DC motor we have to determine the magnitude of the force, by considering the diagram below.

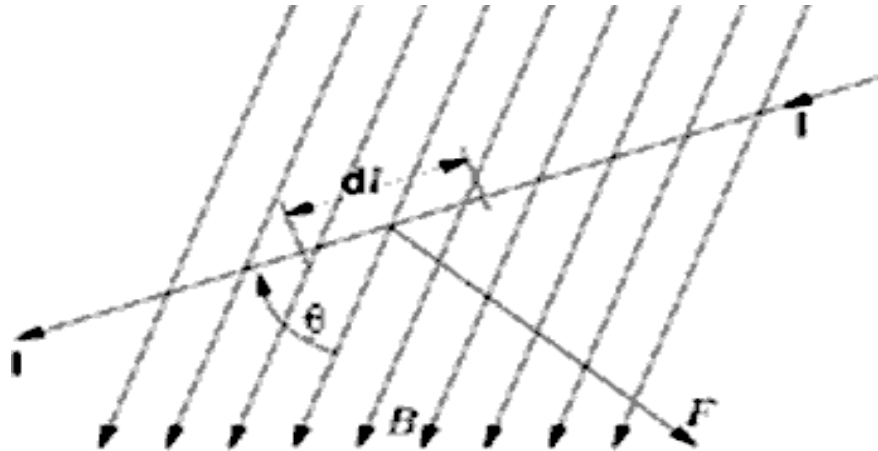

**Fig 3.11: Magnitude of the force for DC Motor.**

We know that when an infinitely small charge  $dq$  is made to flow at a velocity ' $v$ ' under the influence of an [electric field](#)  $E$ , and a [magnetic field](#)  $B$ , then the Lorentz Force  $dF$  experienced by the charge

### 3.8 BASIC ARDUINO SOFTWARE:






**Fig 3.11: Arduino Software**

### **3.8.1 FEATURES OF ARDUINO SOFTWARE:**

- File
- Edit
- Sketch
- Tools
- Help

### **3.9 WIRES:**

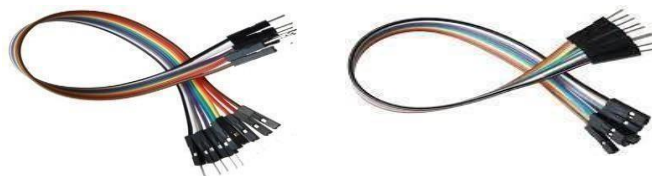

**Fig 3.11(a): Female to Male Jumper Wire.    Fig 3.11(b): Male to Male jumper**

### 3.10 POWER SUPPLY 12V:

The automaton is powered from 12V LiPo battery. The inner electronic equipment of associated external power provides is extremely the same as the look that might be used for an intrinsic or internal provide. External power provides are used each with instrumentality with no different supply of power and with powered instrumentality



Fig 3.12: 12v Power supply

#### 3.10.1 SPECIFICATIONS:

- Capacity: 1100mAh
- Voltage: 11.1V (3S)
- Discharge Rating: 30C
- Charge Rate: 2C
- Dimensions: 138x46x35.5mm
- Weight: 300g

### 3.11 COST ANALYSIS

In this section we will show cost of our project that means cost sheet representation of our project.

#### 3.11.1 COST SHEET:

<b>No</b>	<b>Component Name</b>	<b>Quantity</b>	<b>Purchase Price (TK)</b>
<b>01</b>	Bluetooth Module(HC-05)	1	350.00
<b>02</b>	Arduino UNO	1	450.00
<b>03</b>	L298N motor driver	1	400.00
<b>06</b>	Amr voice app	1	Free
<b>07</b>	Battery and charger	1	1900.00
<b>08</b>	Arduino Software	1	Free
<b>09</b>	Wires	8	100.00
<b>10</b>	Pvc board	1	200
<b>11</b>	Servo motor	1	180
<b>12</b>	Others		500
	<b>Total Cost</b>		<b>=4080.00</b>

#### **Comparison:-**

Our all components are available in market. We get all components are very reasonable price. So that we make this project more cost efficient.

### **3.12 CONCLUSION**

Five main Component & some tools are used in this system to makes it .This Project is used to control the house appliances. Our all component are very simple & available in our country market.

# CHAPTER 4


## SOFTWARE ANALYSIS

### 4.1 INTRODUCTION

In this chapter the software system used and therefore the language within which the program code is outlined is mentioned and therefore the program code selling tools square measure explained. The chapter additionally documents the event of the program for the applying.

### 4.2 DESCRIPTION OF OUR SOFTWARE

The open-source Arduino environment makes it easy to write code and upload it to the I/O board. It runs on Windows, Mac OS X, and Linux. The environment is written in Java and based on Processing, avr-gcc, and other open source software. The screen shot of Arduino 1.6.8 is shown below.

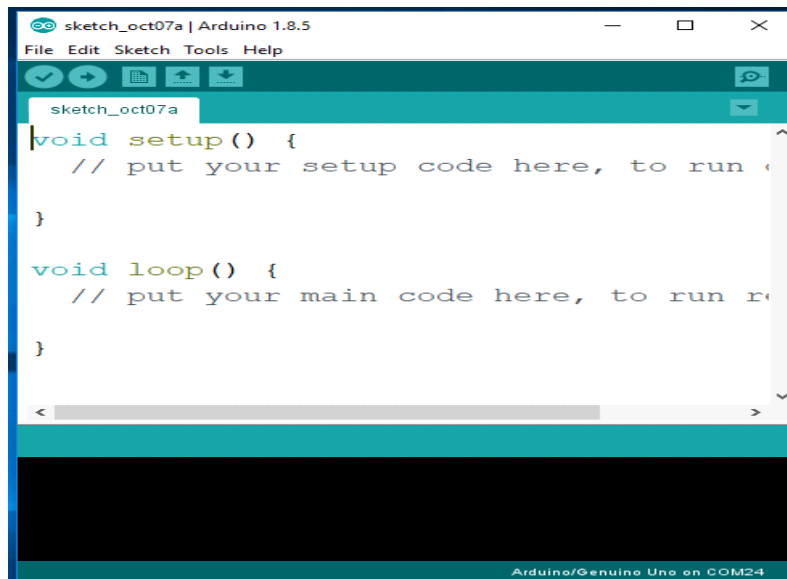


**Fig. 4.1: Software Platform**

The Arduino IDE comes with a C/C++ library called "Wiring" (from the project of the same name), which makes many common input/output operations much easier. Arduino programs are written in C/C++, although users only need define two functions to make a runnable program:

setup() – a function run once at the start of a program that can initialize settings

loop() – a function called repeatedly until the board powers off

**The compiled window of our code is shown below.**

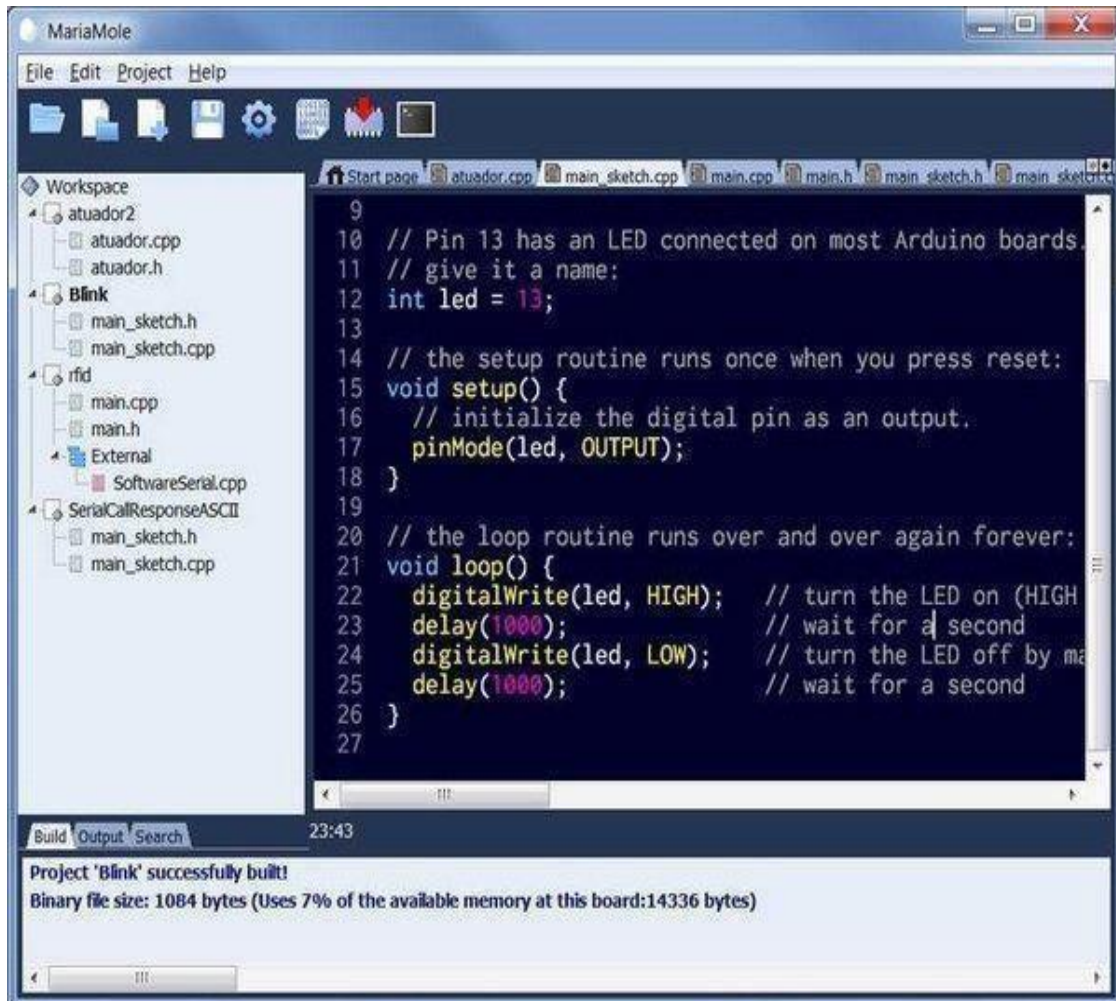

**Fig. 4.2: Compiling window**

## **4.3 CONCLUSION**

The system software developed in Embedded C, C++ language which has the ability of receiving the data from sensor and transmitting the data, and controls all the Robot that connected. Because of its low power consumption, easy usage, reliability it is used in other fields. Software analysis is a very important part of our system. A Software analysis makes sure good design. A proper Software analysis and its burn into Arduino Uno the project to a smooth end.

## CHAPTER 5


### SCHEMATIC REPRESENTATION

#### 5.1 INTRODUCTION

A schematic, or schematic diagram, is an abstract illustration of the structure of a system using standardized symbols and lines. A schematic typically omits all details that are not relevant to the data the schematic is meant to convey, and can add elements that aid comprehension. As an example, a subway map meant for riders might represent a terminal with a dot; the dot does not fit the particular station in any respect however offers the viewer data while not unnecessary visual muddle. A schematic diagram of a system uses symbols to represent the vessels, piping, valves, pumps, and different instrumentation of the system, and their interconnection methods and suppressing physical details.

#### 5.2 SCHEMATIC DIAGRAM

In the previous chapters we got an idea about project block diagram and functions of each block in detail. In this chapter we seen schematic representation of the project and various components what are involved in this project. The below figure shows the schematic representation of the project.

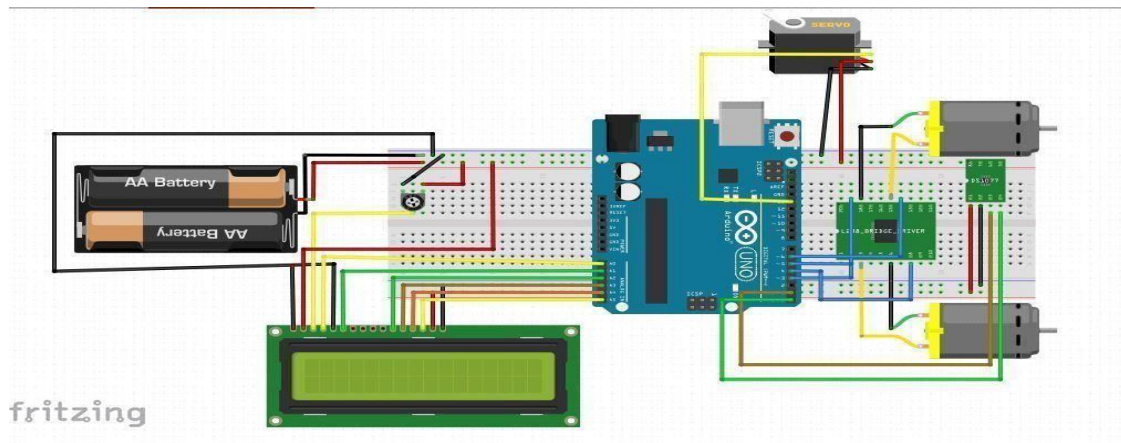

**Fig 5.1: Circuit Diagram**

After seen the above diagram we have an idea about each and every pin connection of microcontroller involves in the project. The wire connections in the project are very important.

**The various components involved in this project are:**

- CRYSTAL OSCILATOR
- RESISTORS
- SWITCHES
- MOTORS
- WHEELS
- PVC BOARD
- SONAR
- SERVO
- LCD
- MICROCONTROLLER
- DRIVER MODULE
- REGULATOR
- CONNECTIG WIRES
- BATTERY AND CHARGER



## 5.2.1 CRYSTAL OSCILLATOR

It is an electronic circuit that uses the mechanical resonance of a moving crystal of piezoelectric material to make an electrical signal with an awfully precise frequency. This frequency is often accustomed keep track of your time (as in quartz wristwatches). In this project crystal oscillator frequency is 11.0592 MHz. The below figure shows the crystal oscillator.



**Fig 5.2: Crystal Oscillator**

## 5.2.2 RESISTOR

The resistor is a passive electrical component which create resistance for flowing electric current .Almost all are electrical networks and electronic circuits which can be found .The resistance in measuren in ohms, an ohms is the resistance tat occurs when a current of one ampere passes through a resistor within one voltage drop across it's terminals.Basically resistor are used in many purpose ssuch as current ,voltage division heat generation, matching and loading circuits.

### **5.2.3 SWITCHES**

In engineering switch plays a important role that can break an electrical circuit delivering one conductor to another conductor. The most identical to manually controlled to electromechanical device with one or more sets of electrical external circuits. Each contacts can be two states one is open and another is closed. Open means contacts are separate and switch is not conducting and closed means contacts are touching and electricity flow between them. Switches are the depends upon the closed conduct and open conduct

### **5.2.4 MOTORS**

A DC motor is an electric motor which runs that an direct electric power. Mainly any electric motor operation depends upon the electromagnetism. A current carrying conductor produces a magnetic field and torque when it is placed in an external magnetic field. Examples of pure DC are Michael Faraday's homo polar motor (which is uncommon), and the ball bearing motor. By far the most common DC motor types are the brushed and brushless types. In any electric motor, operation is based on simple electromagnetism. Mainly it converts electrical energy to mechanical energy.

### **5.2.5 LCD**

LCD means liquid crystal display is a flat display made up of color or pixels front of a light source. It's the common that an LCD display controlled an attached device. Every pixels consist of a column of liquid crystal display between two transparent electrodes. The LCD which connected to the controller 16X1 and two polarizing filters. The specific given commands output will show the display. It depends upon the execute program.

### **5.2.6 MICROCONTROLLER**

The true computer on a chip is nothing but a microcontroller. The design incorporates all of the features found in a microprocessor CPU, ALU, PC, SP and registers.

### **5.2.7 DRIVER MODULE**

L298N is a dual H-bridge motor driver module. Motor drivers act as current amplifiers since they take a low-current control signal and provide a higher-current signal. This higher current signal is used to drive the motors. L298N is a dual H-Bridge motor driver.

### **5.2.8 CHARGED BATTERIES**

Batteries are used to give a electric supply to run the electronic devices, machines, to run the vehicles. Batteries are also helpful in storage purpose. When power supply is not available then we will follow the storage batteries or batteries. Batteries are low cost, can be rechargeable. No expansive.

### **5.2.9 REGULATOR**

A transformer is AN electrical regulator designed to mechanically maintain a continuing voltage level. Electronic voltage regulators square measure found in devices like laptop power provides wherever they stabilize the DC voltages utilized by the processor and alternative components.

## **5.3 CONCLUSION**

From this chapter we conclude that Fig 6.1 shows the schematic diagram of voice control robot through android. This fig shows the overall project representation of the project and we are able to know in which way every pin of the microcontroller involves in this project. And also we are discussed about each component in this project. Fig 6.1 shows the schematic diagram of voice control robot through android. This fig shows the overall project representation of the project and we are able to know in which way every pin of the microcontroller involves in this project. And also we are discussed about each component in this project.

## **CHAPTER 6**


### **RESULT AND DISCUSSION**

#### **6.1 INTRODUCTUION**

In this chapter we'll discuss regarding the assembling process of voice control robot through android and assembling method. During this we'll additionally discuss regarding android, android applications. However the humanoid are going to be helpful during this project. That android applications are utilized in this project? Within the android applications however the commands are used to control the robots and additionally during this chapter we'll discuss regarding robot's operating mechanism. They're briefly explained below.


#### **6.2 ASSEMBLING THE BOARD**

The chassis used for this thesis is hand made in home with pvc board with relatively use in making Chassis, which is widely used for robotics project chases plates and tools. Total assembling process is shown in below chapters.

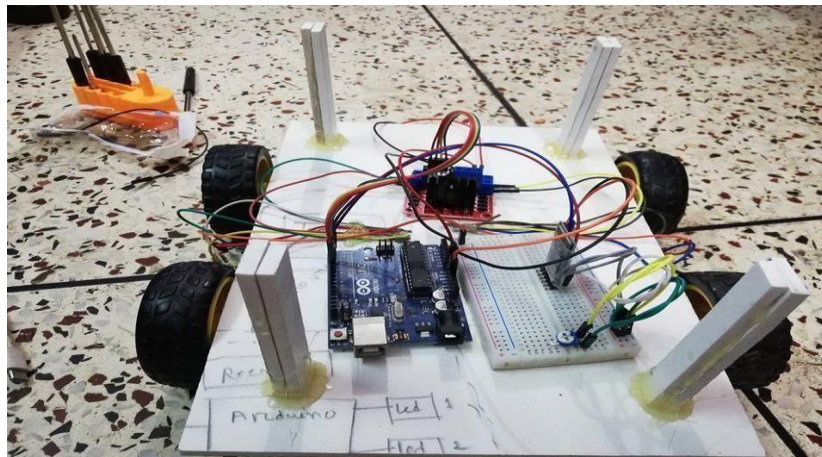


**Fig 6.1: Hardware board**

## 6.2.1 ASSEMBLING PROCESS

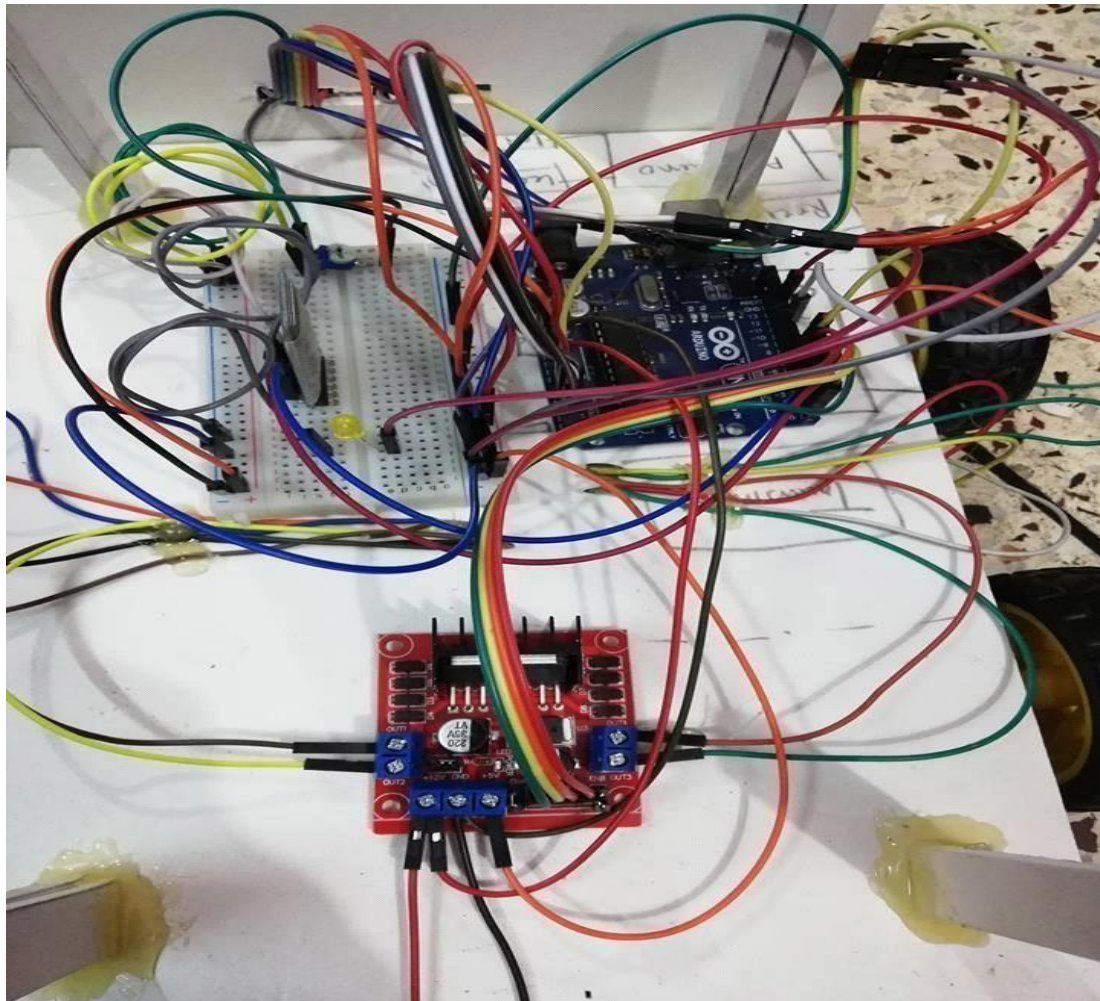

**Fig 6.2: Circuit Board**

## 6.2.2 COMPLETION OF ASSEMBLING PROCESS

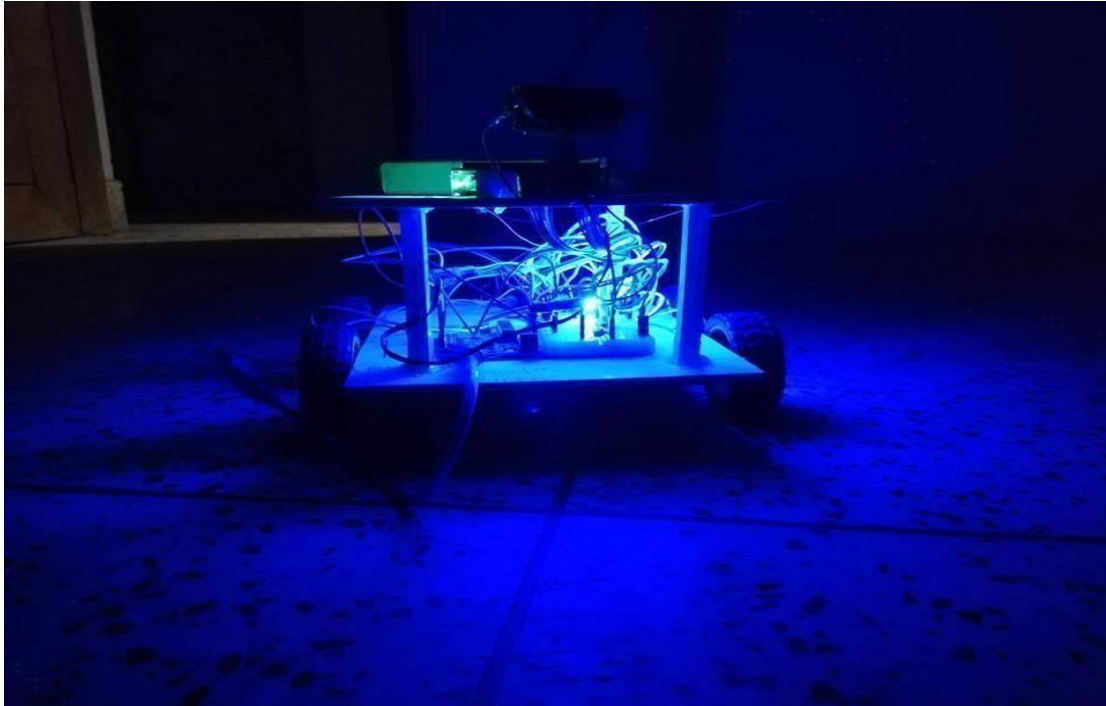

**Fig: 6.2.1 Our Project**

## 6.3 ANDROID APPLICATIONS

These android applications are used to design. They are given as follows

- i) Bluetooth spp test
- ii) Bluetooth AMR (Android meets robot)

### 6.3.1 BLUETOOTH SPP TEST

Bluetooth SPP test is an android application to move robot. It is also available in Google play store. In this applications we will run the robot by using a commands like 2,4,6,8,5.in this application 2 is used to move the robot forward,4 is to move left side,6 is used to move right side,8is used to move backward.5 is used to STOP. These are the commands used for moving robot.

### 6.3.2 BLUETOOTH AMR (ANDROID MEETS ROBOT).

It is also a android application to move robo.It is also available in Google play store. Inthis application we will run the roboby using a voice commands. By using this applicationwe will give voice commands only. In this application we will not give typing commands.

## 6.4 ROBOT'S WORKING MECHANISM

The working mechanism of the robot is based on the information passed from the android mobile phone via Bluetooth connection to the robot using a Bluetooth modem and vice versa. When will give a commands by android phone that will transmitt and receive the information signals.by giving a commands it will move in the given command direction.here is the power supply is given to robot by ecofriendly solar panel and storage batteries.by using both solar panel and batteries we are capable to run the robo. If there is no power or no light energy then power supply is used as vice versa.

## 6.5 TESTING

From the following commands our robot will be follows. The following commands are same as both android apps. What we given to robot via android whther it is voice command or touch command the following commands are same for the robot movement.

COMMAND	ROBOT MOVEMENT
Go back	BACKWARD
Turn left	LEFT
Stop	STOP
Turn right	RIGHT
Go ahead	FORWARD

**Table 6.1: Testing Result**

## **6.6 CONCLUSION**

In this chapter we were discussed about the assembling process of voice control robot. In this chapter we were discussed about android, android applications. How the android applications are used in this project. In this chapter we will discuss about robot's working mechanism.



## CHAPTER 7

### CONCLUSION

#### 7.1 APPLICATIONS:


Certainly we believed that a system would be find wide varite of applicable. Many driver systems like as toys specially household applications like as washing machine, microwaven and pagers and mobile many other form which will controlled by voice android apps in next.

##### 7.1.1 HOME AUTOMATION

Nowadays due to much highest affordable and simplicity throughout smartphones and tab connectivity respectively. Recently the popularities of the home automation increasing greatly in recent years.

##### 7.1.2 WHEELCHAIRS:

Mainly to operate our project the robot is controlled by a giving a specific commands in amr voice apps. From giving the commands the robot will be move or stop.

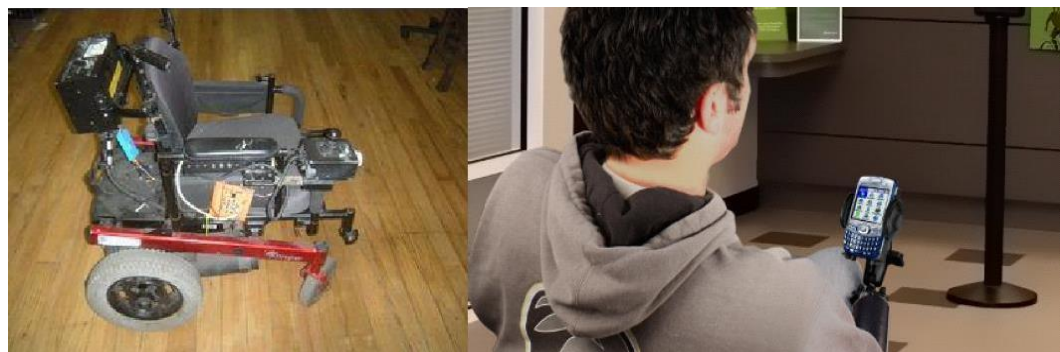

**Fig 7.2: Wheelchair Applications**

### 7.1.3 SURVEILLANCE DEVICE:

It is the monitoring of other changing information, usually of people for the purpose of influencing.

### 7.1.4 MILITARY APPLICATIONS:

Our robot is mobile robot which plays an important role in military matters. With the suitable sensor and smooth camera these robots are operated. All the work will be the firms are getting easily from the mobile robot.



**Fig 7.4: Military Applications**

## 7.2 ADVANTAGES

- Using this robot we can controlled live video feed under giving specific commands.
- It can also be used to known any multiple ways such as clockwise, anticlockwise, forward and backward direction.
- In industries purpose we contolled many oter machine by it.
- This robot is used in hazardous place.
- Execute can program make them to do exactly what I want to do something.

- You can send them to very dangerous places.
- They can do well something for job sectors.
- They can perform task faster than human beings it will be worked any place.
- We send it a dangerous place where are people are not reached.
- They can also use in physically treatment person for helping moving.
- They can reduce the labor work in industry by it portable takes the load from one place to another place. They able to work always 24x7.

## • **DISADVANTAGES**

It will be very expensive to do better fabrication.

- For produce it exact material that's the demerit also.
- Execute this project very hard to program.
- You need highly trained people to make them.
- People can lose jobs in factories.
- It needs maintenance to keep it running.

## **7.4 FUTURE SCOPE:**

The main object such robot system is to assist individuals with motor disabilities it controlling completely. In future time we use a secured wireless channel using secret writing and cryptography. There are many scope will be held in future such as AI movements speech to text translation and lots of additional. It also be in agricultural scope to additionally develop under artificial intelligence. In future larger bandwidth system will be developed by this project. There are a number of interfacing applications might be created for home applications

## REFERENCES:

- <https://www.arduino.cc/en/Tutorial/RobotRemoteControl>
- <https://www.instructables.com/id/Voice-Control-Robot-in-7-Minutes/>
- <https://www.robotshop.com/community/robots/show/voice-control-arduino-robot>
- <https://tronixlabs.com.au/news/tutorial-l298n-dual-motor-controller-module-2a-and-arduino/>
- [http://wiki.sunfounder.cc/index.php?title=Motor\\_Driver\\_Module-L298N](http://wiki.sunfounder.cc/index.php?title=Motor_Driver_Module-L298N)
- <https://components101.com/wireless/hc-05-bluetooth-module>
- <https://amr-voice.en.aptoide.com/>
- Scribd.com, the world's largest online library. URL:<http://www.scribd.com>
- Encyclopedia of regulators, capacitors, diodes, resistors
- <http://www.worldtechgossips.com> simple way of understand
- Other websites
- <http://www.elprocus.com/solar-panel-facts/>
- <http://org.ntnu.no/solarcells/pages/introduction.php>
- <http://www.facstaff.bucknell.edu>
- <http://hyperphysics.phy-astr.gsu.edu/hbase/electronic/leds.html>
- [www.national.com](http://www.national.com)
- [www.atmel.com](http://www.atmel.com)
- [www.microsoftsearch.com](http://www.microsoftsearch.com)
- [www.geocities.com](http://www.geocities.com)