



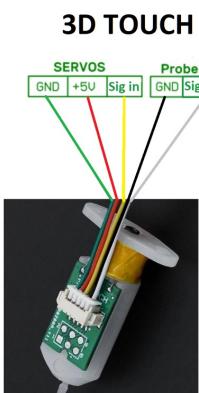
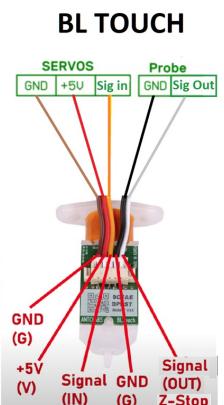
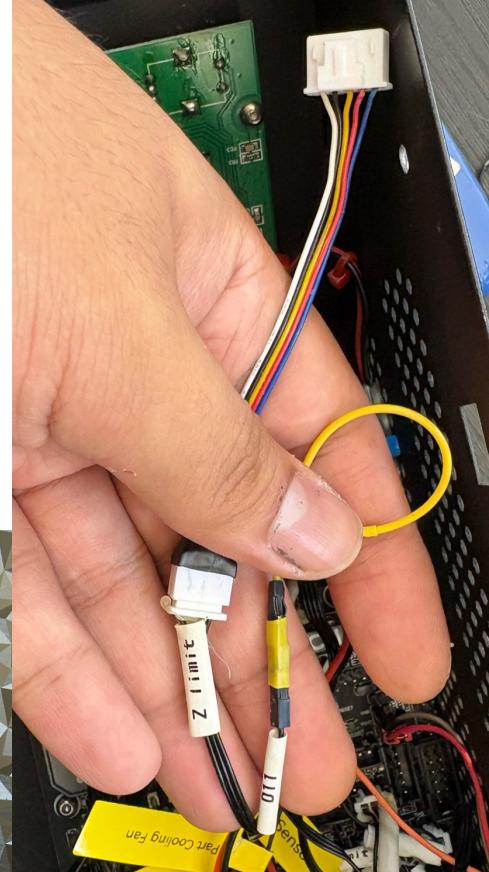
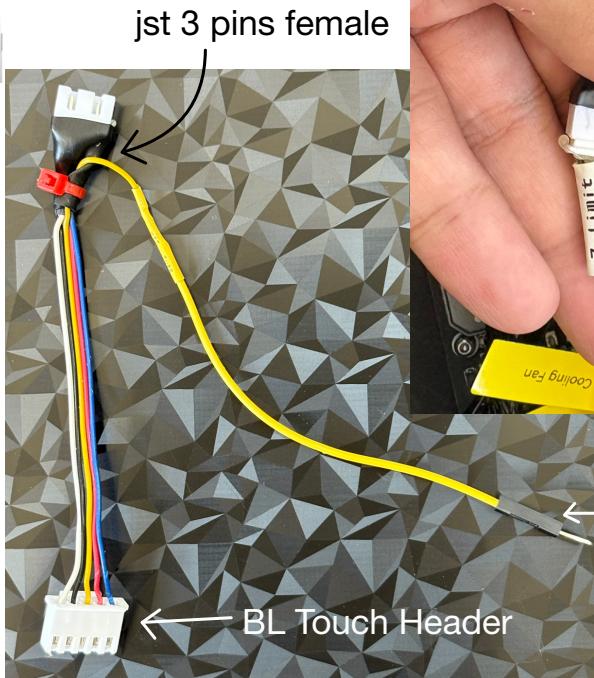
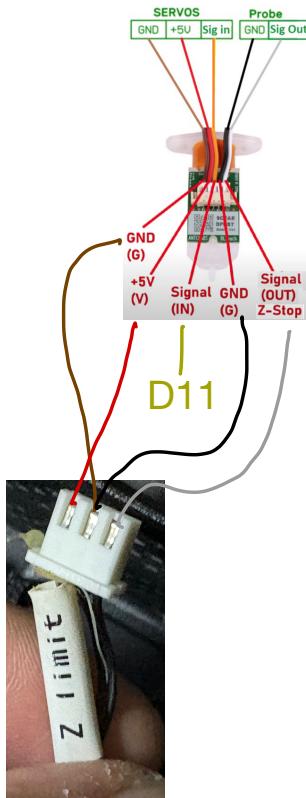


BL Touch Wiring

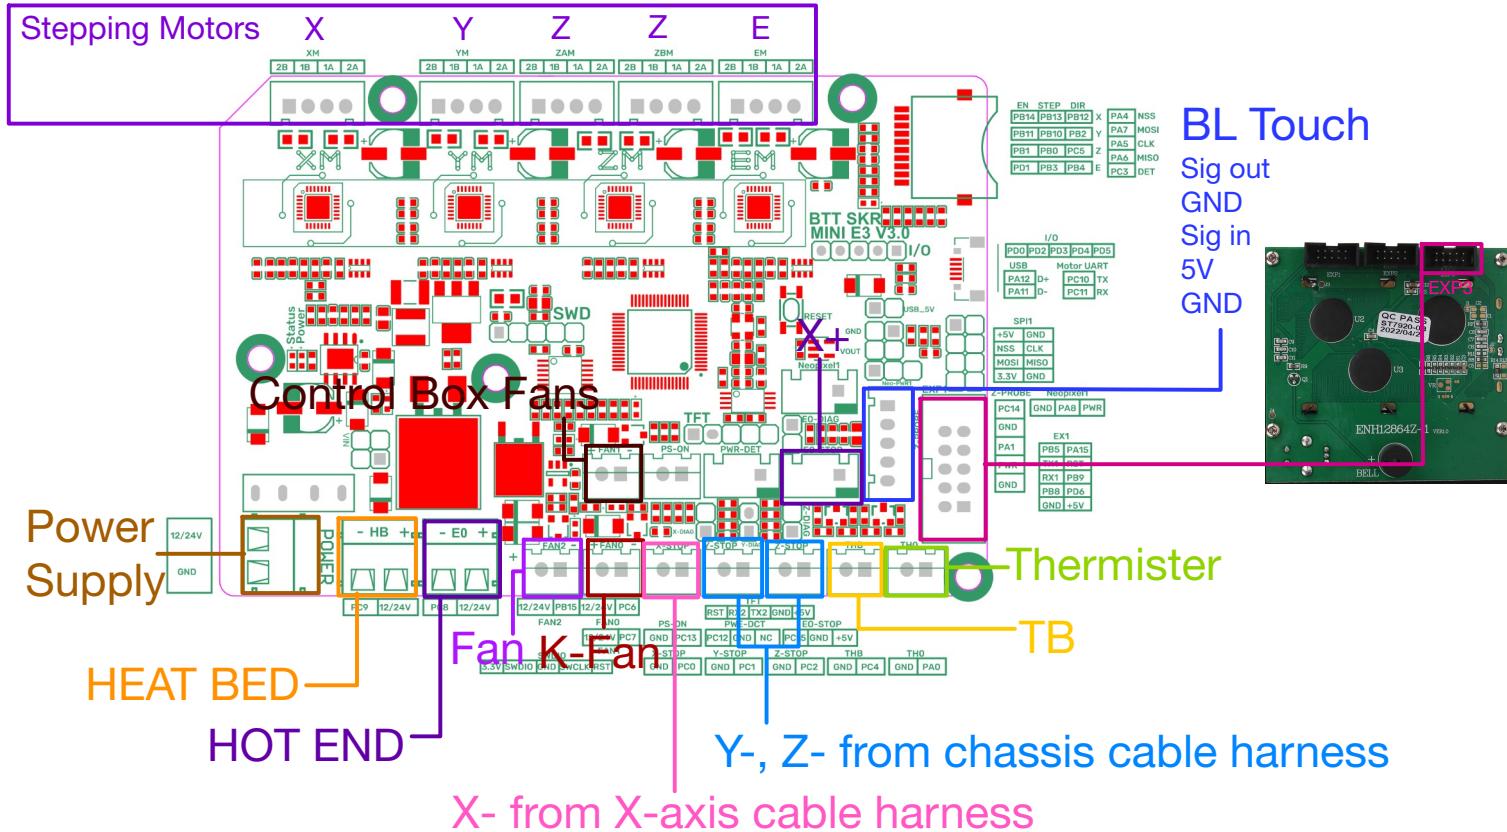




SKR Mini E3 V3 Wiring.

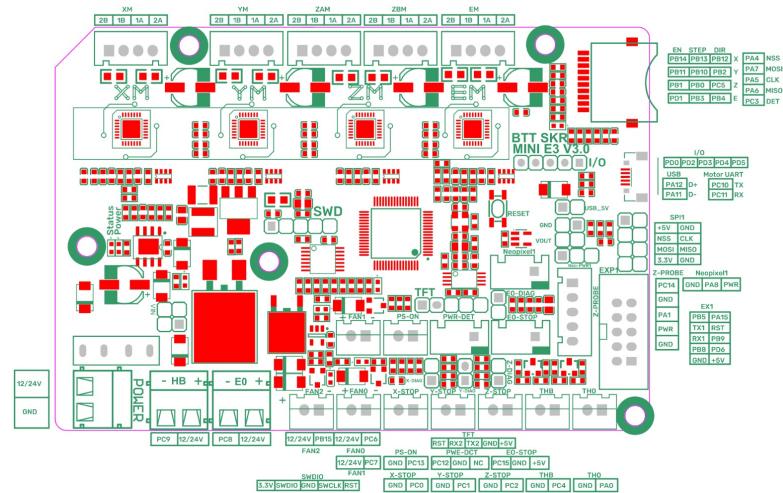

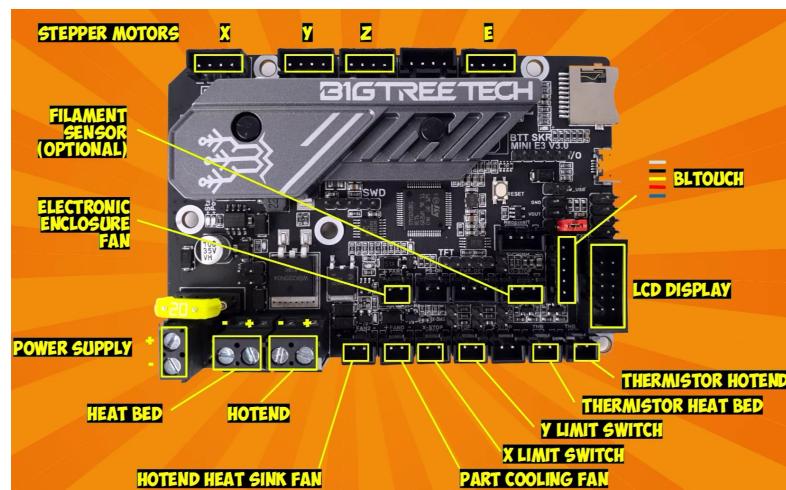

Creatality 2.5.2

BL touch signal D11

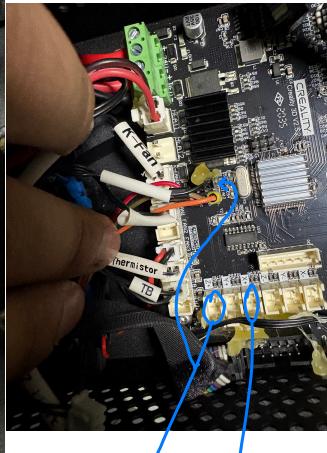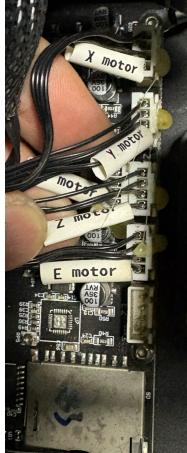


relay caselight PIN A12



BL touch
F sensor

Creatality 3D V2.5.2 (Creatality CR-10 V2) - UART





```
[tmc2208 stepper_x]
uart_pin: ar52
microsteps: 16
run_current: 0.800
hold_current: 0.500
stealthchop_threshold: 250

[tmc2208 stepper_y]
uart_pin: ar50
microsteps: 16
run_current: 0.800
hold_current: 0.500
stealthchop_threshold: 250

[tmc2208 stepper_z]
uart_pin: ar51
microsteps: 16
run_current: 0.800
hold_current: 0.500
stealthchop_threshold: 200

[tmc2208 extruder]
uart_pin: ar12
microsteps: 16
run_current: 0.900
hold_current: 0.500
stealthchop_threshold: 200
```

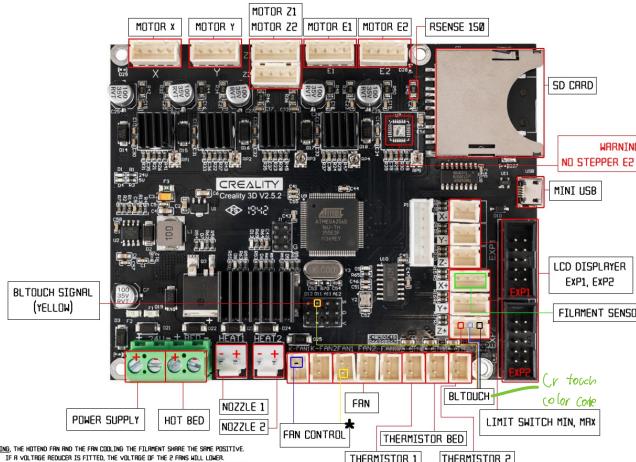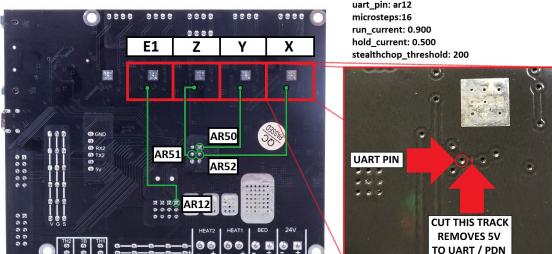

CUT THIS TRACK
REMOVES 5V
TO UART / PDN