



prac №12

1.

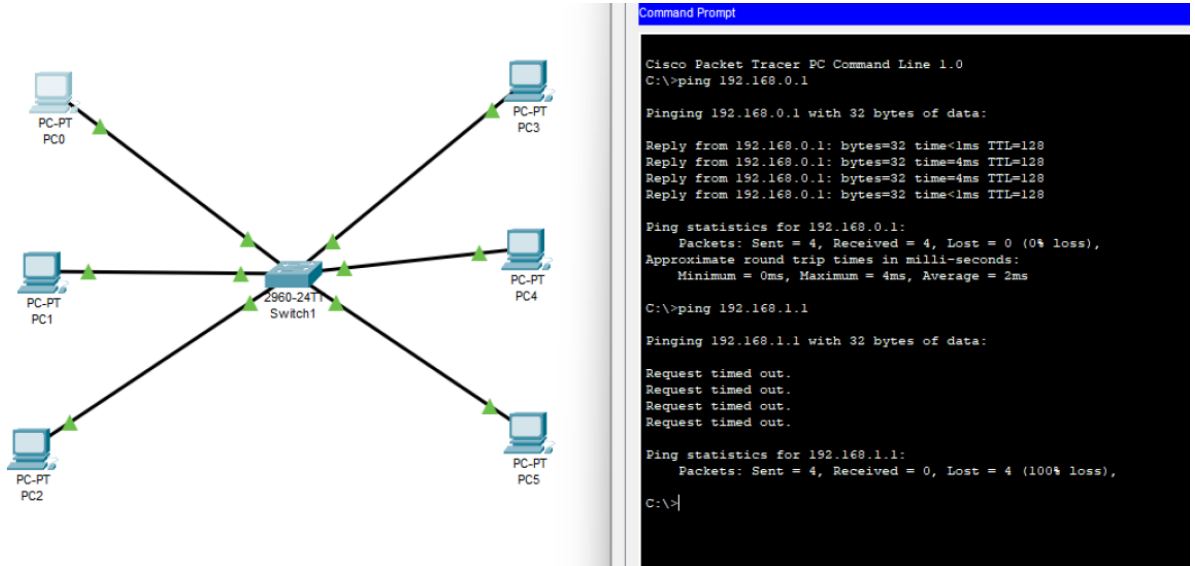

2.

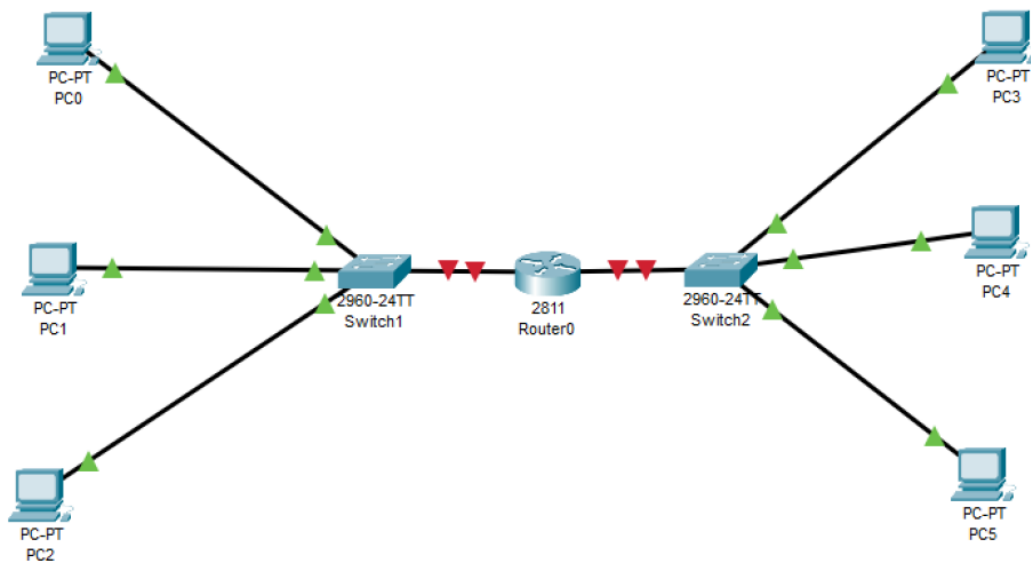

3.

Settings

Algorithm Settings

ROUTING

Static

RIP

SWITCHING

VLAN Database

INTERFACE

FastEthernet0/0

FastEthernet0/1

Port Status

Bandwidth

Duplex

MAC Address

00D0.BA27.7501

IP Configuration

IPv4 Address

192.168.0.254

Subnet Mask

255.255.255.0

Tx Ring Limit

10

Physical **Config** CLI Attributes

GLOBAL

Settings

Algorithm Settings

ROUTING

Static

RIP

SWITCHING

VLAN Database

INTERFACE

FastEthernet0/0

FastEthernet0/1

FastEthernet0/1

Port Status

Bandwidth

Duplex

MAC Address

00D0.BA27.7502

IP Configuration

IPv4 Address

192.168.1.1

Subnet Mask

255.255.255.0

Tx Ring Limit

10

Equivalent IOS Commands

```
Router>enable
Router#
```

4.

```
Router(config)#exit
Router#
%SYS-5-CONFIG_I: Configured from console by console

Router#show ip route
Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP
       D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
       N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
       E1 - OSPF external type 1, E2 - OSPF external type 2, E - EGP
       i - IS-IS, L1 - IS-IS level-1, L2 - IS-IS level-2, ia - IS-IS inter area
       * - candidate default, U - per-user static route, o - ODR
       P - periodic downloaded static route

Gateway of last resort is not set

Router#
```

Copy

F

5.

