


1.

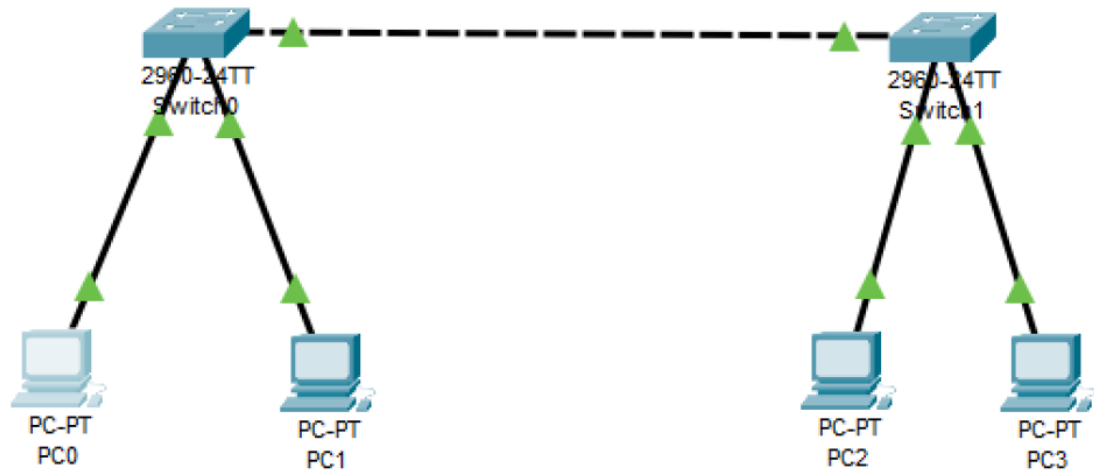

2.

```

Switch>en
Switch#conf t
Enter configuration commands, one per line.  End with CNTL/Z.
Switch(config)#int fa0/1
Switch(config-if)#sw ac vl 10
% Access VLAN does not exist. Creating vlan 10
Switch(config-if)#no sh
Switch(config-if)#int fa0/2
Switch(config-if)#sw ac vl 20
% Access VLAN does not exist. Creating vlan 20
Switch(config-if)#no sh
Switch(config-if)#exit
Switch(config)#
  
```

3.

```

Switch(config)#int gi0/1
Switch(config-if)#sw mode trunk
Switch(config-if)#no sh
Switch(config-if)#exit
Switch(config)#
  
```

4.

```
C:\>ping 192.168.1.2

Pinging 192.168.1.2 with 32 bytes of data:

Reply from 192.168.1.2: bytes=32 time=5ms TTL=128
Reply from 192.168.1.2: bytes=32 time<1ms TTL=128
Reply from 192.168.1.2: bytes=32 time<1ms TTL=128
Reply from 192.168.1.2: bytes=32 time=3ms TTL=128

Ping statistics for 192.168.1.2:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 5ms, Average = 2ms

C:\>
```

5.

```
Router#conf t
Enter configuration commands, one per line.  End with CNTL/Z.
Router(config)#int fa0/0
Router(config-if)#ip ad 192.168.1.100 255.255.255.0
Router(config-if)#no sh

Router(config-if)#
%LINK-5-CHANGED: Interface FastEthernet0/0, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/0, changed state to up

Router(config-if)#int fa1/0
Router(config-if)#ip ad 192.168.2.100 255.255.255.0
Router(config-if)#no sh

Router(config-if)#
%LINK-5-CHANGED: Interface FastEthernet1/0, changed state to up
```

6.

```
Switch>en
Switch#conf t
Enter configuration commands, one per line.  End with CNTL/Z.
Switch(config)#int fa0/3
Switch(config-if)#sw ac vl 10
Switch(config-if)#no sh
Switch(config-if)#exit
Switch(config)#
```