Prac20

1.

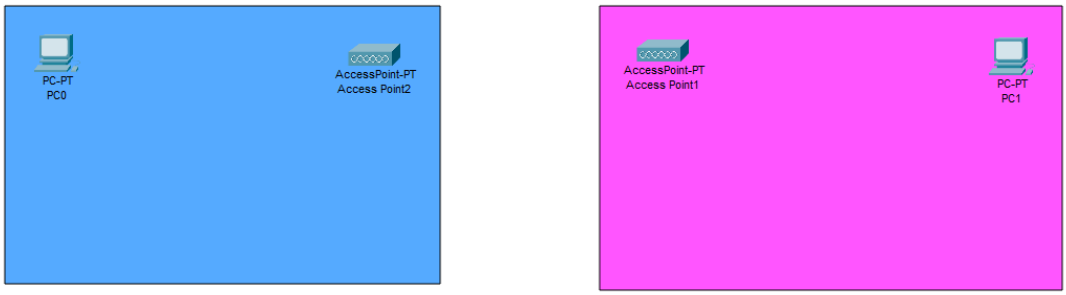
PC-PT
PC0
AccessPoint-PT
Access Point2
AccessPoint-PT
Access Point1
PC-PT
PC1

2.

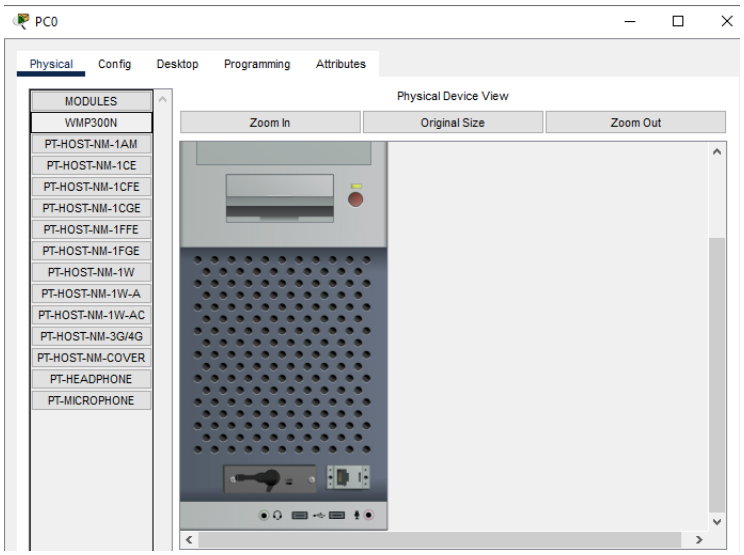
PC0
Physical
Config
Desktop
Programming
Attributes
MODULES
WMP300N
PT-HOST-NM-1AM
PT-HOST-NM-1CE
PT-HOST-NM-1CFE
PT-HOST-NM-1CGE
PT-HOST-NM-1FFE
PT-HOST-NM-1FGE
PT-HOST-NM-1W
PT-HOST-NM-1W-A
PT-HOST-NM-1W-AC
PT-HOST-NM-3G/4G
PT-HOST-NM-COVER
PT-HEADPHONE
PT-MICROPHONE
Physical Device View
Zoom In
Original Size
Zoom Out

3.

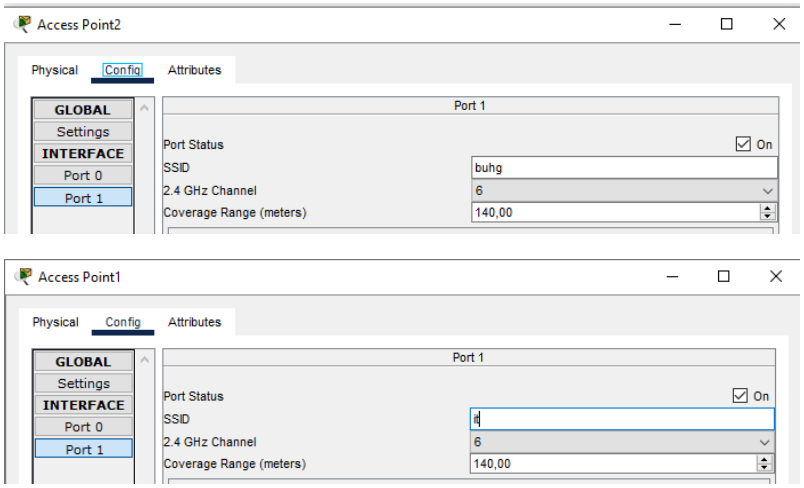
Access Point2
Physical
Config
Attributes
GLOBAL
Settings
INTERFACE
Port 0
Port 1
Port 1
Port Status
On
SSID
buhg
2.4 GHz Channel
6
Coverage Range (meters)
140,00
Access Point1
Physical
Config
Attributes
GLOBAL
Settings
INTERFACE
Port 0
Port 1
Port 1
Port Status
On
SSID
6
2.4 GHz Channel
Coverage Range (meters)
140,00

4.

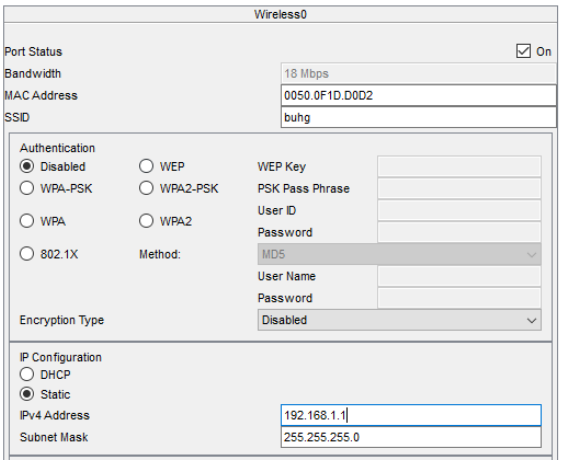
Wireless0
Port Status
On
Bandwidth
18 Mbps
MAC Address
0050.0F1D.D0D2
SSID
buhg
Authentication
Disabled
WEP
WEP Key
WPA-PSK
WPA2-PSK
PSK Pass Phrase
User ID
WPA
WPA2
Password
802.1X
Method:
MD5
User Name
Password
Encryption Type
Disabled
IP Configuration
DHCP
Static
IPv4 Address
192.168.1.1
Subnet Mask
255.255.255.0

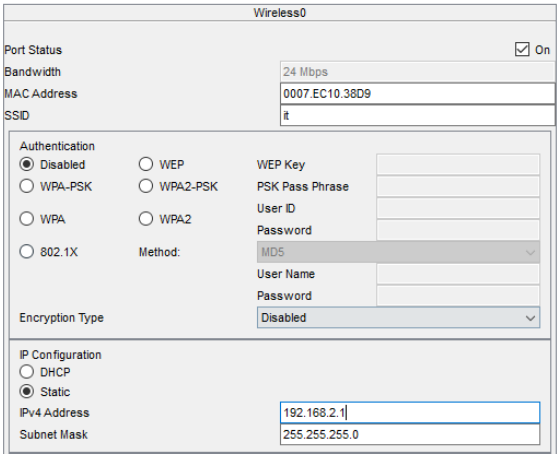
Wireless0
Port Status
On
Bandwidth
24 Mbps
MAC Address
0007.EC10.38D9
SSID
it
Authentication
Disabled
WEP
WEP Key
WPA-PSK
WPA2-PSK
PSK Pass Phrase
User ID
WPA
WPA2
Password
802.1X
Method:
MD5
User Name
Password
Encryption Type
Disabled
IP Configuration
DHCP
Static
IPv4 Address
192.168.2.1
Subnet Mask
255.255.255.0

5.

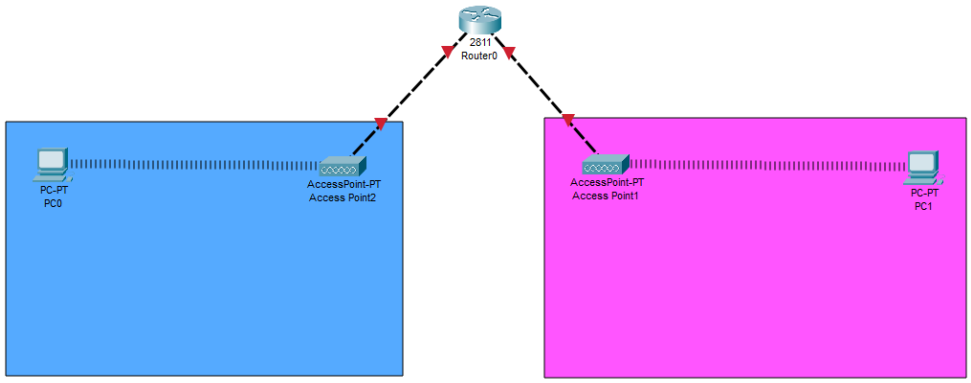
2811
Router0
PC-PT
PC0
AccessPoint-PT
Access Point2
AccessPoint-PT
Access Point1
PC-PT
PC1

6.

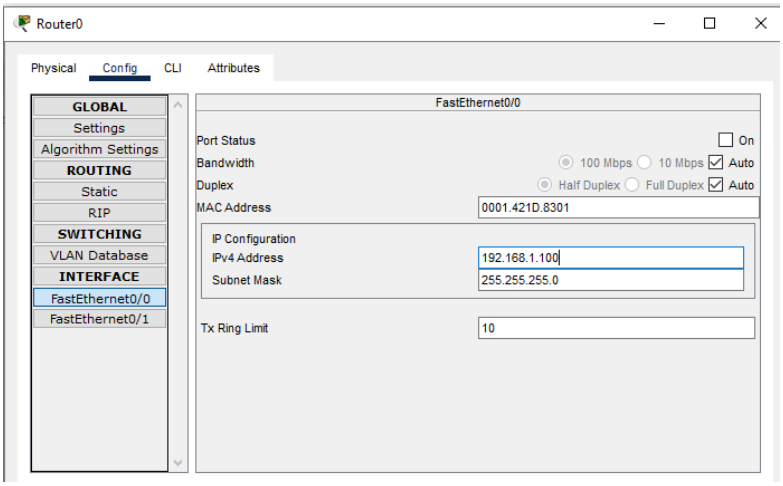

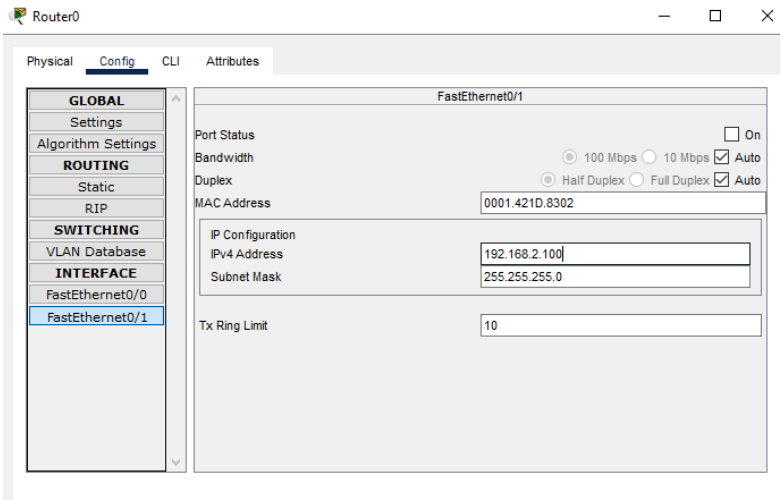

Настраиваем шлюз в PC

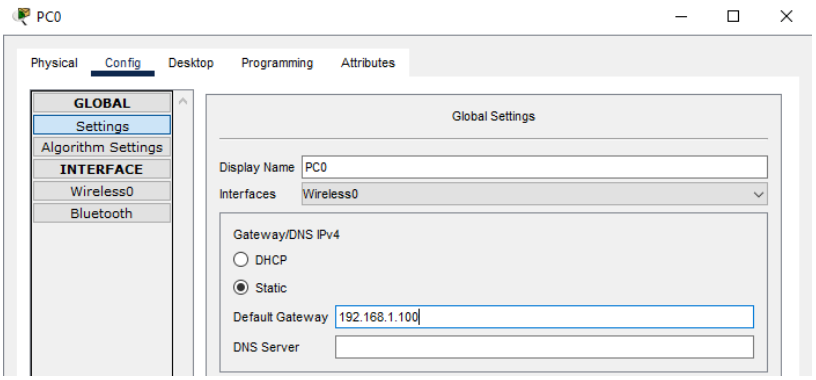

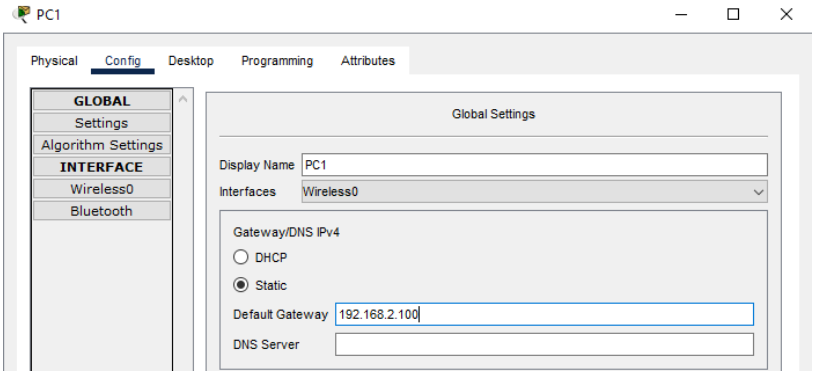

7.

```
C:\>ping 192.168.2.1

Pinging 192.168.2.1 with 32 bytes of data:

Reply from 192.168.2.1: bytes=32 time=17ms TTL=127
Reply from 192.168.2.1: bytes=32 time=12ms TTL=127
Reply from 192.168.2.1: bytes=32 time=10ms TTL=127
Reply from 192.168.2.1: bytes=32 time=14ms TTL=127

Ping statistics for 192.168.2.1:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 10ms, Maximum = 17ms, Average = 13ms
```

8.

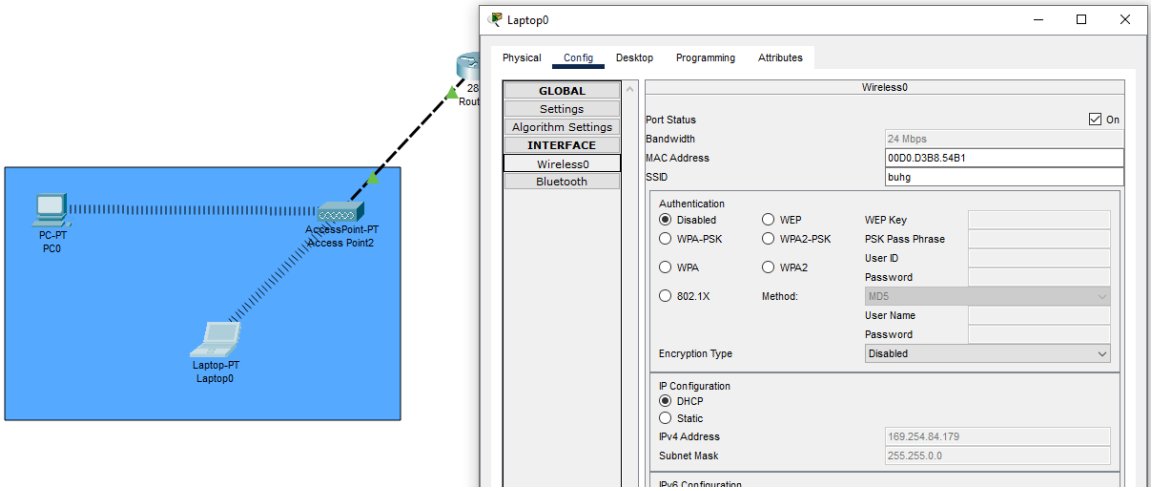

9.

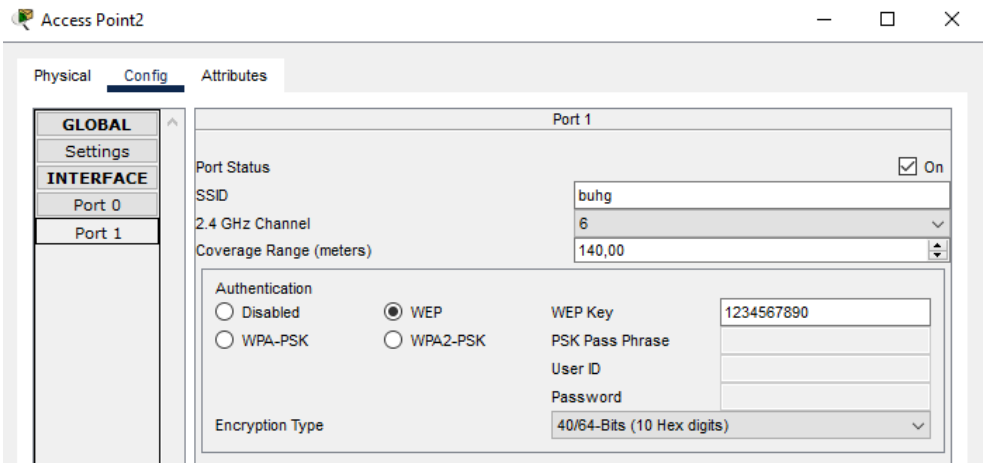

10.

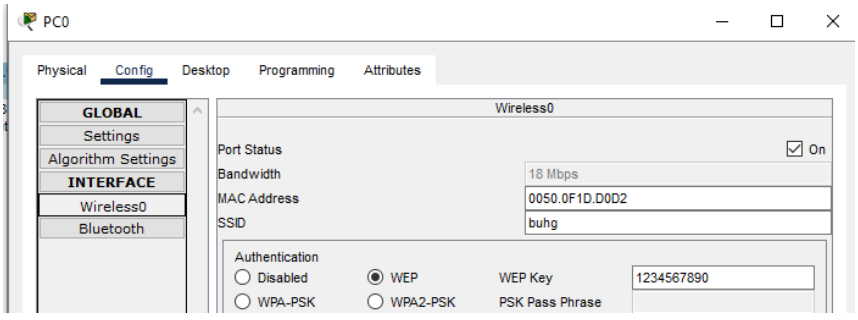

11.

12.

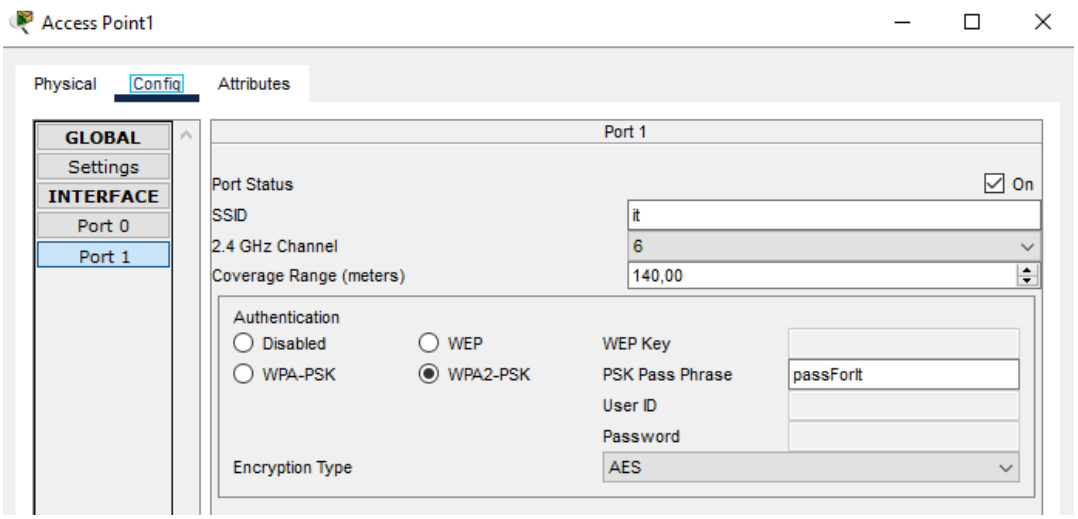
Access Point1
Physical
Config
Attributes
GLOBAL
Settings
INTERFACE
Port 0
Port 1
Port 1
Port Status
On
SSID
it
2.4 GHz Channel
6
Coverage Range (meters)
140,00
Authentication
Disabled
WEP
WPA-PSK
WPA2-PSK
WEP Key
PSK Pass Phrase
passForIt
User ID
Password
Encryption Type
AES

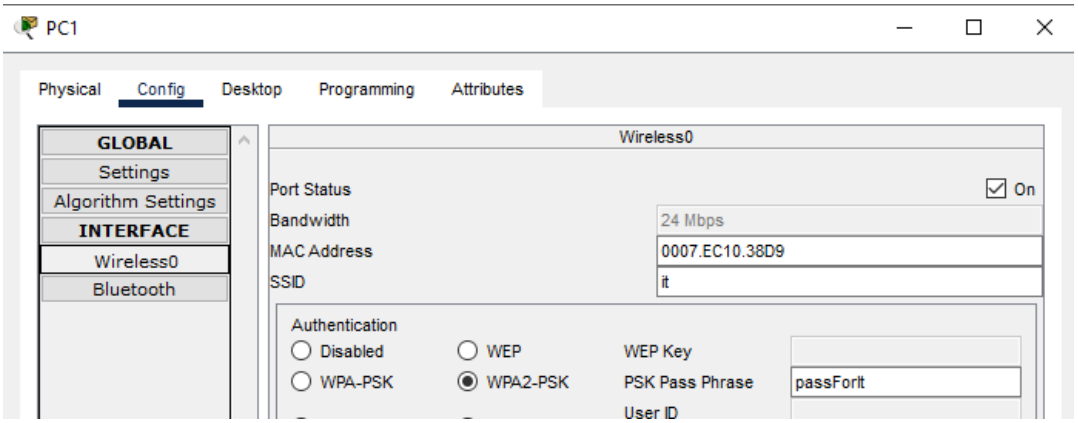
PC1
Physical
Config
Desktop
Programming
Attributes
GLOBAL
Settings
Algorithm Settings
INTERFACE
Wireless0
Bluetooth
Wireless0
Port Status
On
Bandwidth
24 Mbps
MAC Address
0007.EC10.38D9
SSID
it
Authentication
Disabled
WEP
WPA-PSK
WPA2-PSK
WEP Key
PSK Pass Phrase
passForIt
User ID

13.

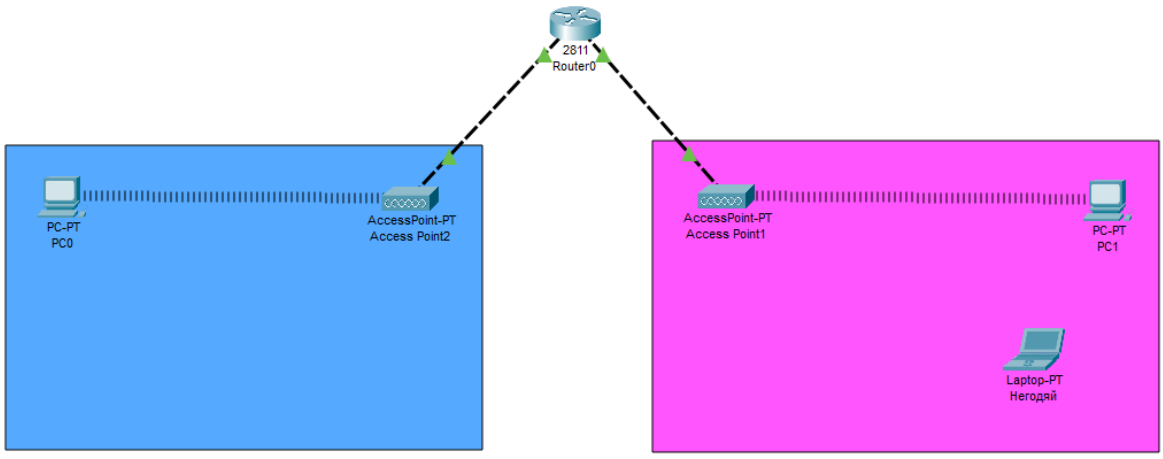
2811
Router0
PC-PT
PC0
AccessPoint-PT
Access Point2
AccessPoint-PT
Access Point1
PC-PT
PC1
Laptop-PT
Негодяй