Exp 9: Design a simple network topology using Cisco Packet Tracer.

AIM:

To design and configure a simple network topology with one router two switches, and multiple PCs using Cisco packet Tracer.

Procedure:

1) Open Cisco packet Tracer and create a new project.

2) Drag one Router (2811), two switches (2960), and four PCs onto the workspace.

3) Connect PC0 and PC1 to Switch0 using Copper straight-Through Cables.


4) Connect Switch0 to Router Gigabit Ethernet 0/0.

5) Configure PC0: IP - 192.168.1.2 / Mask - 255.255.255.0 GW - 192.168.1.1.

6) Configure Router: CLI -> enable -> conf t -> int g0/0 -> ip address 192.168.1.1 255.255.255.0 -> no shutdown

7) Test connectivity: Ping PCs from PC0 to verify inter-network communication.

Result:

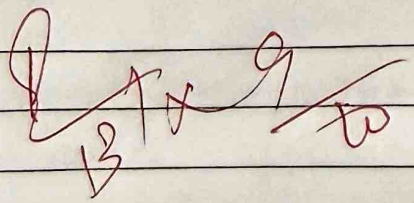

A network topology with one router, two switches, and four PCs was successfully created.