




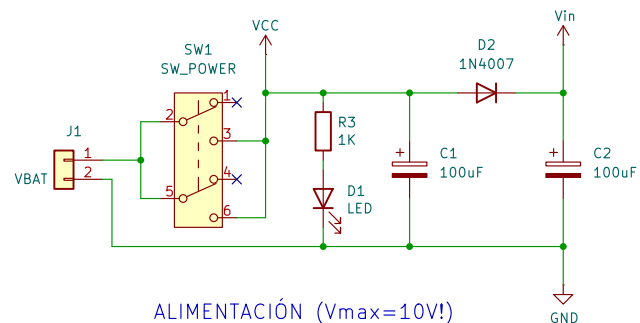

ALIMENTACIÓN (Vmax=10V!)

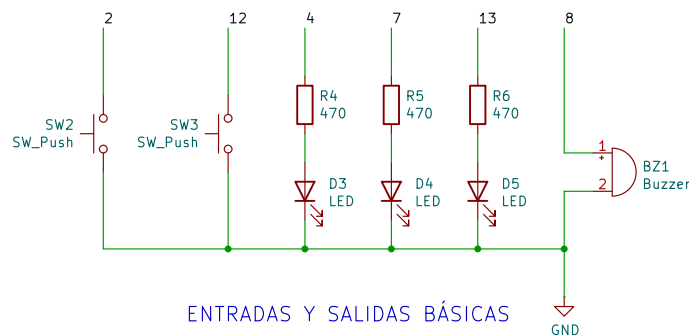


ENTRADAS Y SALIDAS BÁSICAS

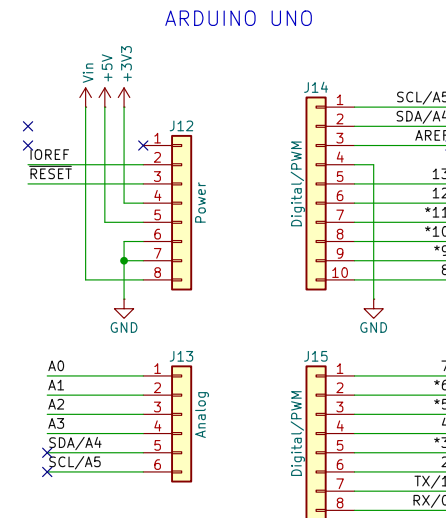


* Indicates a PWM-capable pin

Arduino Uno Rev 3 Pinout


PIN	GENERAL	SUMO	FUTBOL
0	TX		BT(RX)
1	RX		BT(TX)
2	SW1		
3	MOTOR 2A		
4	LED 1		
5		ULTRA 1 ECHO	
6		ULTRA 1 TRIGGER	
7	LED 2		
8	BUZZER		
9	MOTOR 1A		
10	MOTOR 1B		
11	MOTOR 2B		
12	SW2		
13	LED 3		
A0	SENSOR BATERIA		
A1	SENSOR IR1		
A2	SENSOR IR2		
A3	SENSOR IR3		
A4	I2C(SDA)	ULTRA 2 TRIGGER	
A5	I2C(SCL)	ULTRA 2 ECHO	

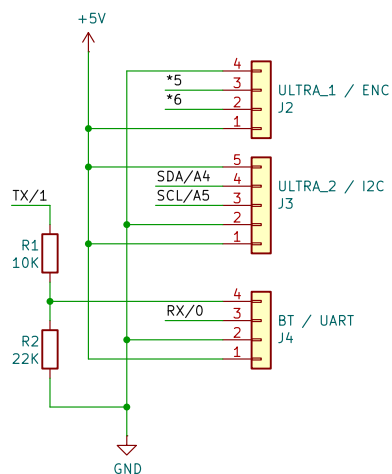

Sensores digitales, BT, I2C

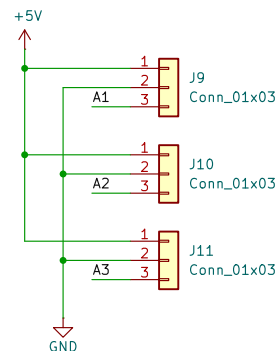


E/S Analógicas A0...A3

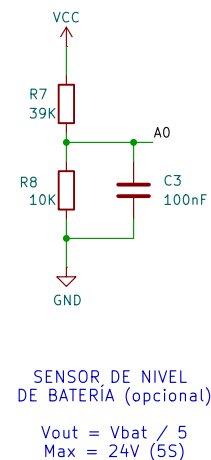

SENSOR DE NIVEL DE BATERIA (opcional)

$$V_{out} = V_{bat} / 5$$

$$Max = 24V (5S)$$

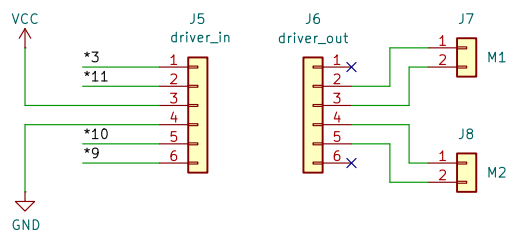

DRIVER DE MOTORES (DRV8833)

ESETP N° 703

Sheet: /
File: V2.1.kicad_sch

Title: Robotshield

Size: A4 Date: 2026-06-30

KiCad E.D.A. 9.0.2

Rev: 2.1

Id: 1/1