


Friwo Factory · Final Assembly Line And Corridor (Light scene 1)

Summary

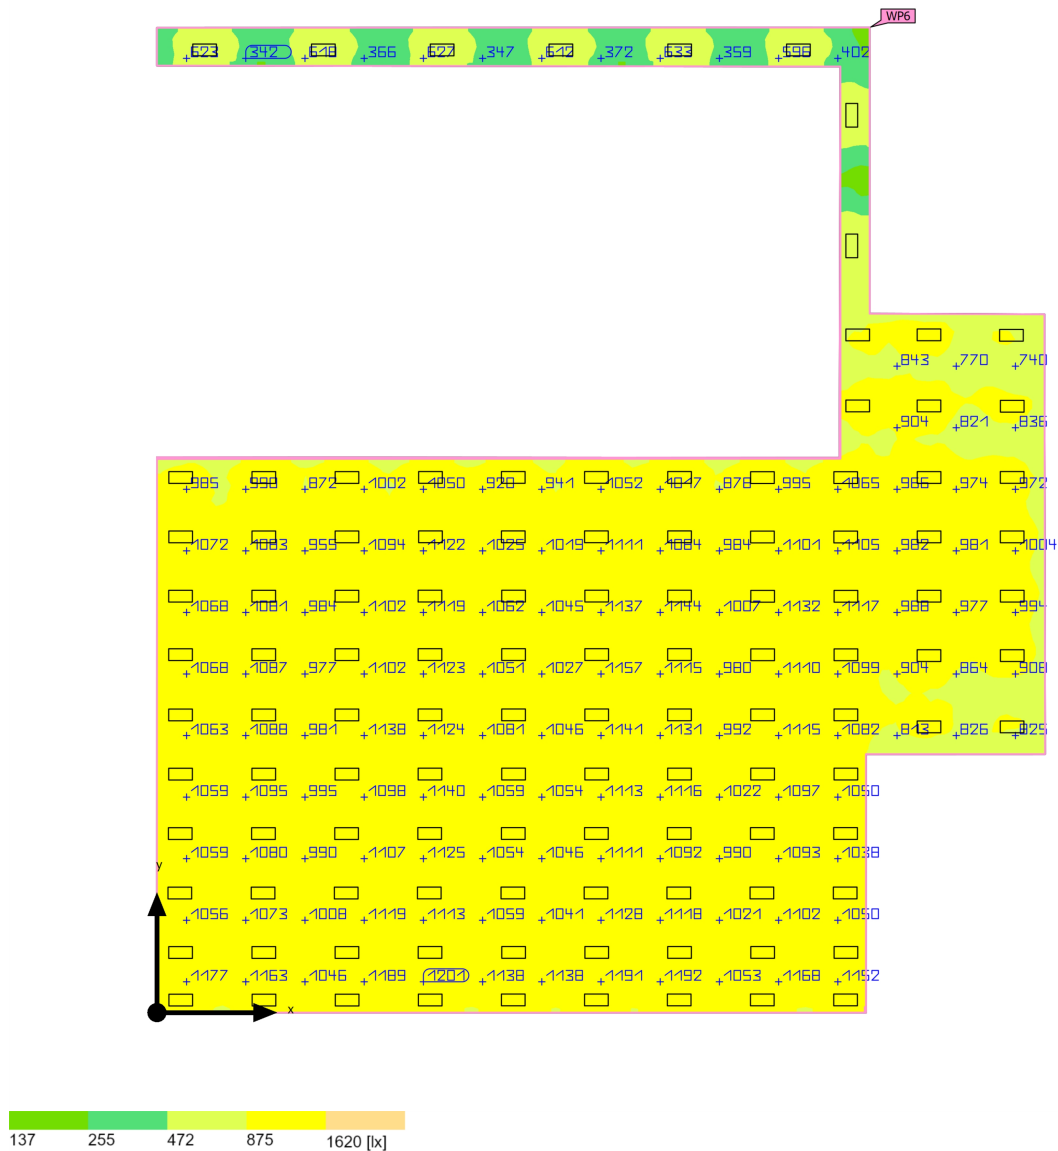

Ground area 1347.10 m²

Reflection factors Ceiling: 80 %,
Walls: 50.0 %,
Floor: 50.0 %

Maintenance factor 0.80 (fixed)

Mounting height 3.584 m

Height_{Working plane} 0.800 m

Wall zone_{Working plane} 0.000 m

Friwo Factory · Final Assembly Line And Corridor (Light scene 1)

Summary

Results

	Symbol	Calculated	Target	Index
Working plane	$\bar{E}_{\text{perpendicular}}$	1019 lx	$\geq 600 \text{ lx}$	WP6
	$U_o (g_1)$	0.19	≥ 0.70	WP6
Energy estimation ⁽²⁾	Consumption	7695 kWh/a	max. 47150 kWh/a	
Space	Lighting power density	2.54 W/m ²	–	
		0.25 W/m ² /100 lx	–	

(1) Based on a rectangular space of 50.600 m x 45.609 m and SHR of 0.25.

(2) Calculated using DIN:18599-4.

Utilisation profile: Industrial activities and crafts - Electrical and electronics industry (19.6 Electronic workshops, testing, adjusting)

Luminaire list

pcs.	Manufacturer	Article No.	Article name	R _{UG}	P	Φ	Luminous efficacy
114	PARAGON	PIFS336L5 4/30	Clean Room Light PIFS336L36 3X20W 3000K IP54 Powder-coated steel fixture,Pre-anodize aluminium reflector and Plastic light cover	–	30.0 W	11700 lm	390.0 lm/W