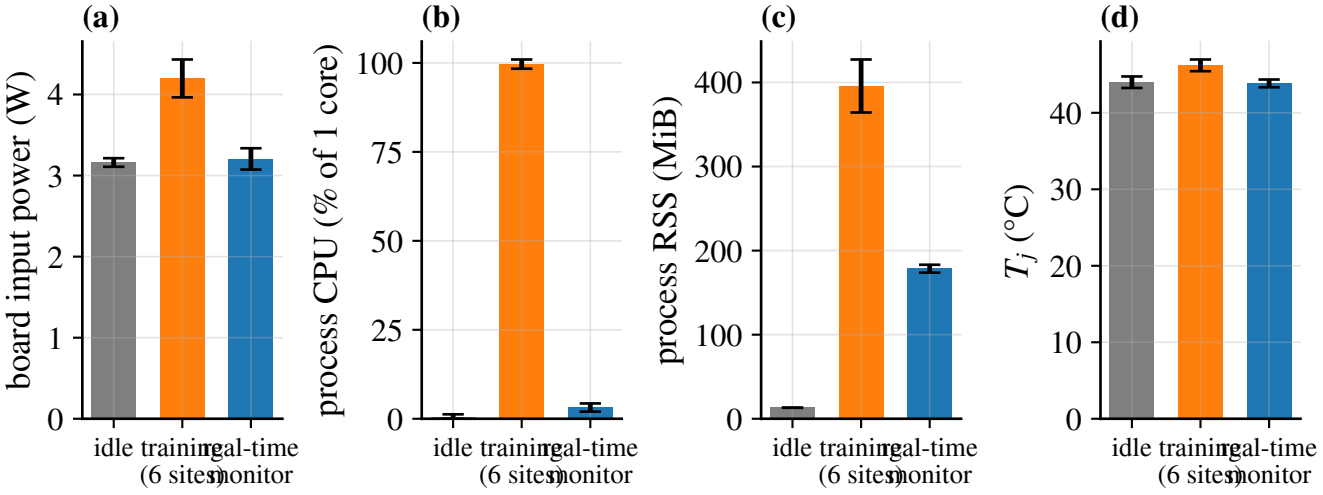
(a)
board input power (W)
0
1
2
3
4
idle
training (6 sites)
real-time monitor
(b)
process CPU (% of 1 core)
0
25
50
75
100
idle
training (6 sites)
real-time monitor
(c)
process RSS (MiB)
0
100
200
300
400
idle
training (6 sites)
real-time monitor
(d)
T_j (°C)
0
10
20
30
40
idle
training (6 sites)
real-time monitor