



1	2	3	4	5	6	7	8
---	---	---	---	---	---	---	---

USB C CONNECTOR 1

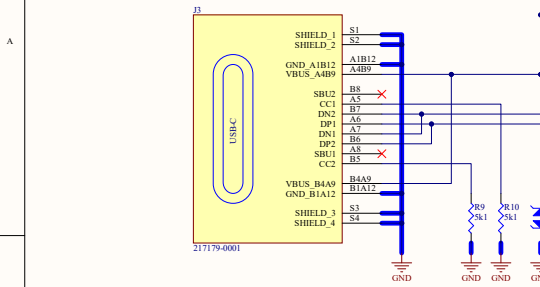


USB TO UART




Design note:
If in Self Power Configuration, set
CBUS3 as VBUS SENSE.

HEADERS

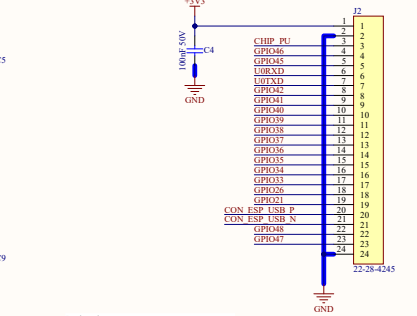


Designed note:
+5v and/or +3v3 can be possibly used as an
input power
(if configured correctly).


USB C CONNECTOR 2

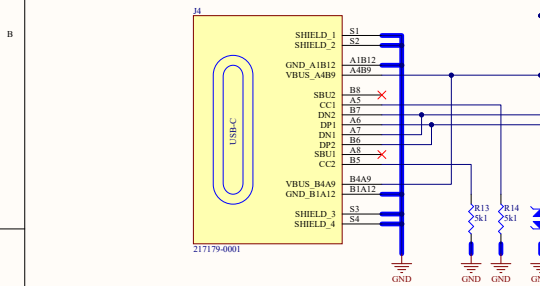


5V POWER SELECTOR 3V3 POWER S




3V3 POWER SELECTOR




5V TO 3V3




POWER LED




USER LED




SERIAL SIGNAL HANDLING

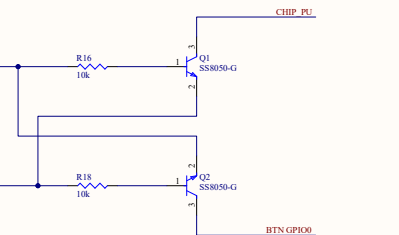


RESET BUTTON



BOOT BUTTON



ESP32 MODULE

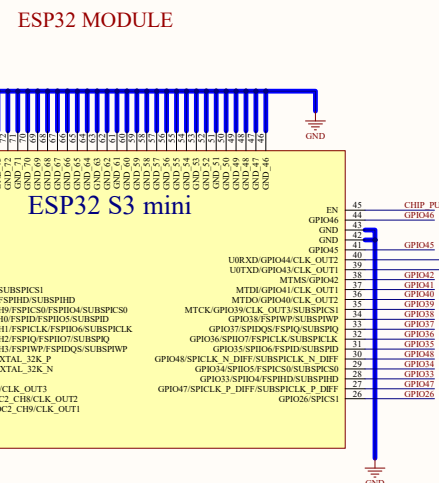

U1
ESP32-S3-MINI-1-N8

Title ESP32 with USB-C				(C) designed kousuk
Size A2	Number			Revision
Date:	9-25-2026		Sheet of	
File:	C:\Users\...ESP32 with USB-C SchDoc		Drawn By: kousuk	