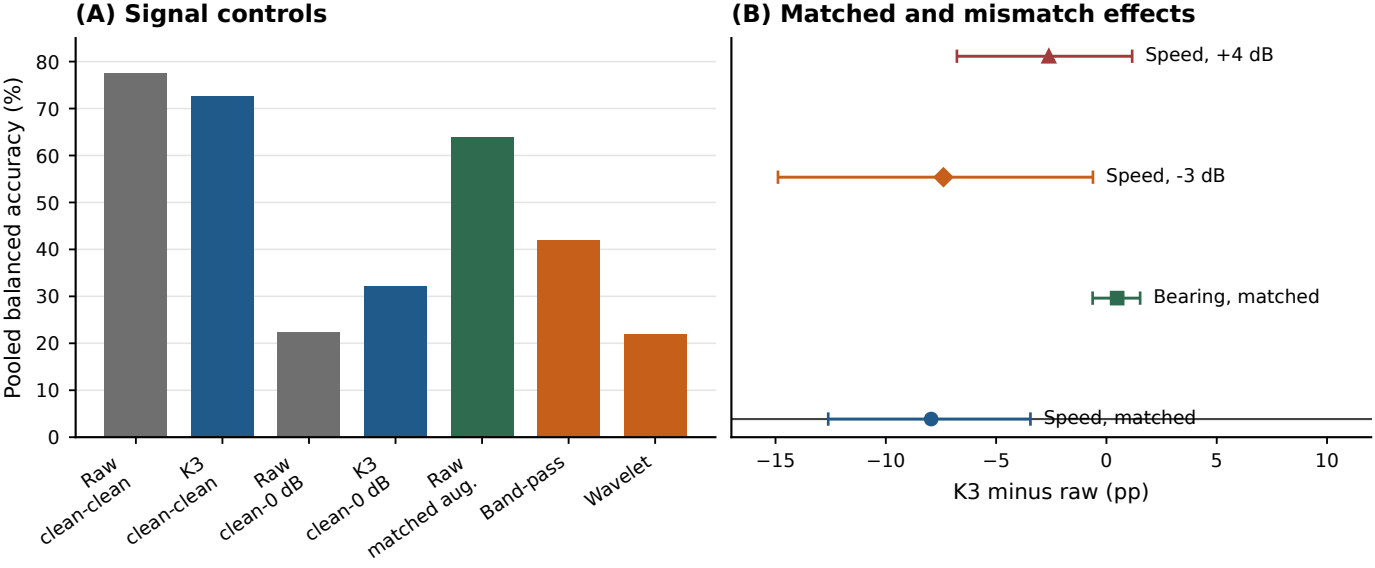
(A) Signal controls
Pooled balanced accuracy (%)
0
10
20
30
40
50
60
70
80
Raw clean-clean
K3 clean-clean
Raw clean-0 dB
K3 clean-0 dB
Raw matched aug.
Band-pass
Wavelet
(B) Matched and mismatch effects
Speed, +4 dB
Speed, -3 dB
Bearing, matched
Speed, matched
−15
−10
−5
0
5
10
K3 minus raw (pp)