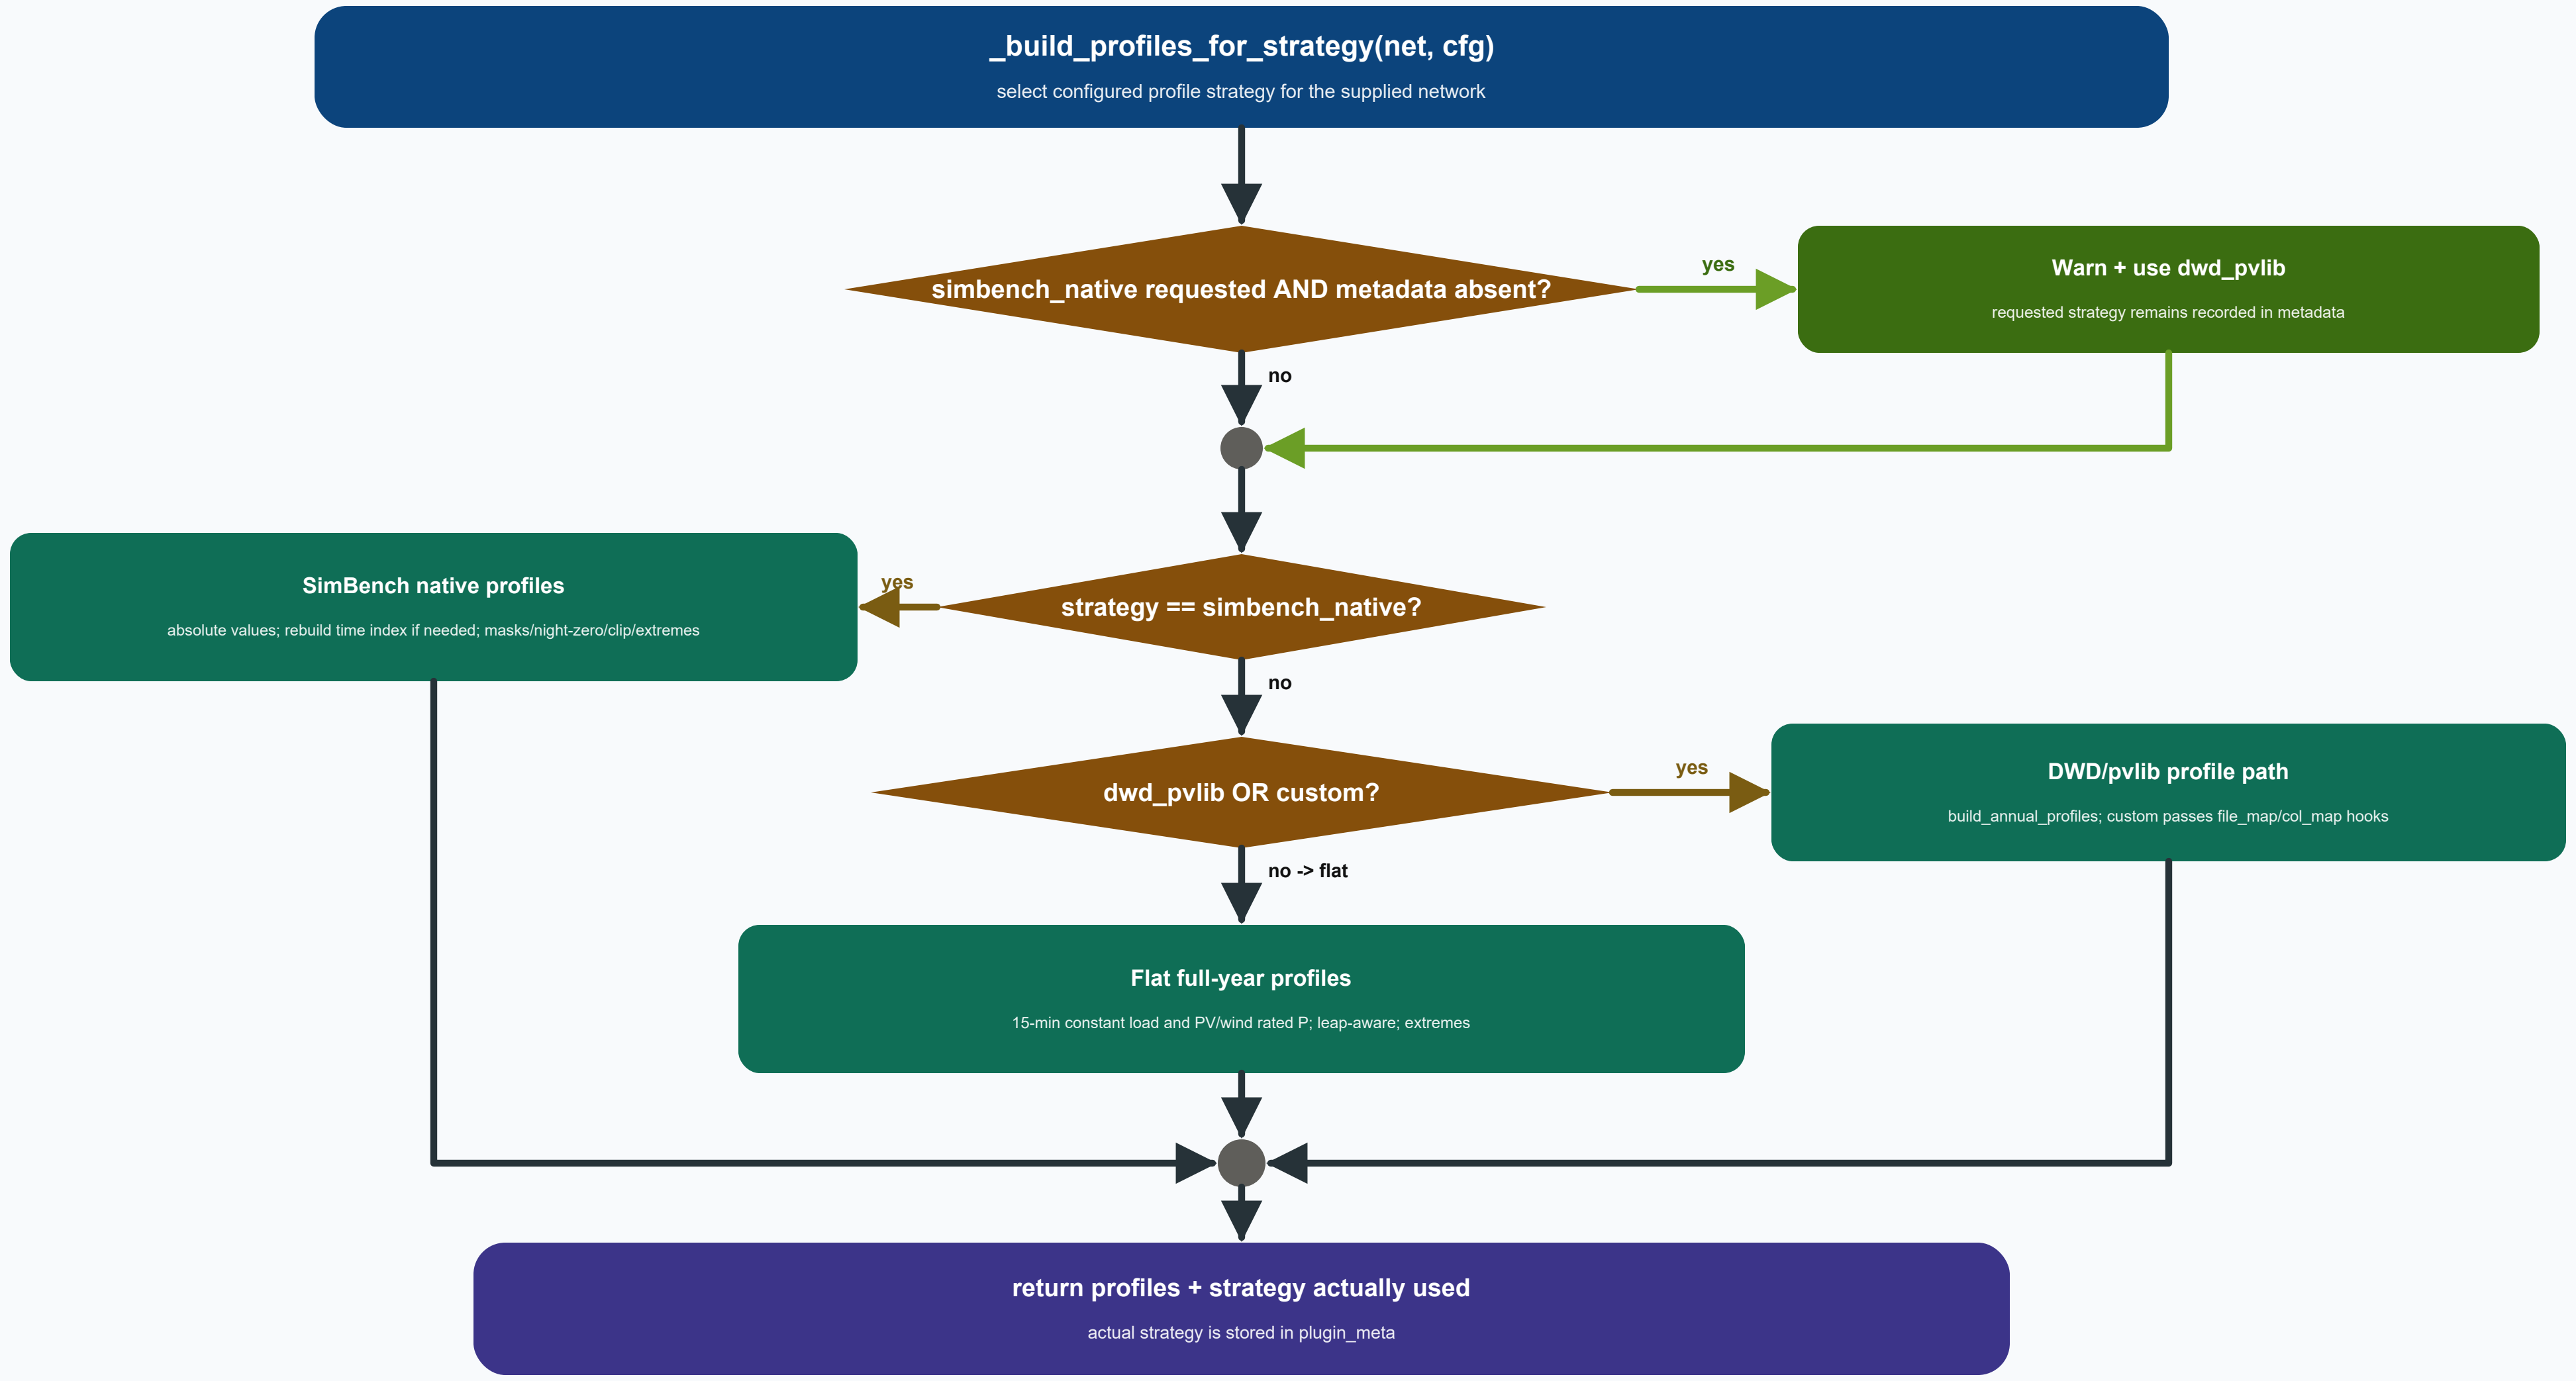

Strategy selection and fallback

Profile construction begins from cfg['strategy']; the same configuration is retained when profiles are later rebuilt for net_hc.

Only simbench_native has a runtime fallback: missing net.profiles metadata logs a warning and switches the actual strategy to dwd_pvlib.

requested_strategy remains unchanged in plugin_meta, while strategy records what was actually executed.

After fallback handling, the code follows the exact if / elif / else dispatch shown in the execution graph.

Strategy implementations

simbench_native uses sb.get_absolute_values on the already-loaded network.

If its time axis is not a DatetimeIndex, a configured-year 15-minute index is rebuilt.

PV/wind masks, night-time PV zeroing, non-negative clipping and extreme-day detection are then applied.

dwd_pvlib calls build_annual_profiles with the configured/default DWD data directory and a safe network name.

custom is valid and uses the same DWD builder with YAML file_map/col_map hooks.

flat repeats load.p_mw and PV/wind sgen.p_mw over a leap-aware full-year 15-minute index.

HC-stressed profile factory

make_profile_factory parses the YAML once when the factory is created and returns a callable for a later stressed network.

When invoked with net_hc, the closure calls _build_profiles_for_strategy(net_hc, cfg) using the configured strategy.

This rebuilds profile columns from the stressed network where the selected strategy supports them and preserves fallback behavior.

The returned metadata adds '_hc_stressed' to the name and preserves source, requested strategy, limits, notes and YAML path.

The actual stressed-network strategy is recorded separately in case simbench_native had to fall back.