



Horizon 60TM

Imaging Radar, Multi-Domain

KMB Telematics, Inc.

July 31, 2024

Preliminary - Subject to Change

Notice of Proprietary Property

The information contained herein is the proprietary property of KMB Telematics Inc.

The possessor agrees to the following:

1. To maintain this document in confidence
2. Not to reproduce or copy it
3. Not to reveal or publish it in whole
4. All rights reserved


Patent Notice

Technologies and products described in this document are covered by US patents 11,435,471; 11,448,754; 11,728,839; 11,835,647; 11,965,955. Other patents and pending patents may also apply.

Export Control Classification Number (ECCN)

The systems described may be subject to Export Administration Regulations. Your company, as the exporter of record, is responsible for determining the correct classification of any item at the time of export. Any export classification by KMB is for KMB's internal use only and shall not be construed as a representation or warranty regarding the proper export classification or whether an export license or other documentation is required for exporting KMB systems.

Specifications, Preliminary

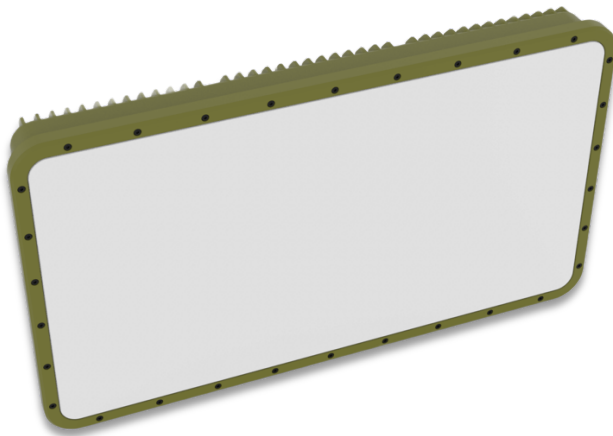

Size	65	cm x 37 cm x 14 cm
Weight	16.5	kg
Power	205	W In operation, peak
	<1	W Standby
Resolution, horizontal	1.6	deg
Resolution, vertical	2.1	deg
Angular accuracy, horizontal	0.2	deg
Angular accuracy, vertical	0.2	deg
Field of view, horizontal	90	deg (± 45 deg)
Field of view, vertical	80	deg (± 40 deg)
Maximum range of detection		
To DJI Mavic (RCS: -20 dBsm)	2,150	m Clear weather
	1,840	m Light rain: 5 mm/hr
	1,460	m Heavy rain: 12 mm/hr
To dismount (RCS: 0 dBsm)	8,400	m Clear weather
	5,520	m Light rain: 5 mm/hr
	3,550	m Heavy rain: 12 mm/hr
To truck (RCS: 10 dBsm)	15,050	m Clear weather
	8,430	m Light rain: 5 mm/hr
	4,970	m Heavy rain: 12 mm/hr
Range resolution	15	m
Refresh rate	1.7	frames / sec
Min velocity	0	m/s Zero Doppler™
Max velocity	± 87	m/s
Velocity resolution	0.09	m/s
Frequency band	24	GHz K _a band
Input voltage	28	V MIL-STD-1275E
Electrical Interfaces	Power, high-speed data	
Communications protocol	2.5G Ethernet	

Output data	3D imagery: reflectivity and velocity	High bandwidth, suitable for classification or sensor fusion using AI
	Target tracks	Low bandwidth, suitable for cuing other sensors
Temperature, operation	-25 - 55 °C	
Temperature, storage	-40 - 80 °C	
Ingress protection	IP 69K	Waterproof, washable