



COMPLYMAX CO.,LTD.



COMPANY PROFILE

COMPLYMAX CO.,LTD

COMPLYMAX CO.,LTD , TEL 095-803-6047 ,Email 9dcomplymax@gmail.com



COMPANY PROFILE

Introduction

COMPLYMAX CO.,LTD. More than experiences 20 years is an instrumentation product and solutions powerhouse that manufactures and represents various types of field instruments ,valve, spare part sight glass and electrode for boiler and safety protection to all process industries with a team of dedicated, experienced professionals to provide unmatched world class solutions.



Industries Served

- Chemical & Petrochemical
- Power Plant
- Tank Farm
- Oil & Gas
- EPC

Specialized Instrument

- Level
- Temp
- Pressure
- Vibration



Portfolio

Pressure Measurement

Pressure Gauge
Diaphragm Pressure Gauge
Industrial Pressure Transmitter
Gauge with Contact
Flush Diaphragm Pressure Transmitter
Pressure switch

Level Measurement

Level Meter

Radar Level Meter

Ultrasonic Level
Electrode Level
Level switch

Level Sight Glass

Level Magnetic
Level Bicolor gauge
Level Transparent

Temperature Measurement

Temperature Gauge
Temperature Transmitter
RTD & Thermocouple

Heater

Valve

Pneumatic Control Valve
Ball Valve
Globe Valve
Butterfly valve

Flow Meter

Electromagnetic Flowmeter
Vortex Flowmeter
Rotameter
Thermal Mass Flowmeter
Handheld Ultrasonic Flowmeter
Flow switch

Safety Protection tank

Pressure vacuum relieve valve
(Breather valve)
N2 Blanketing Valve
Gauge Hatch
Emergency Valve
Flame Arrestor

Safety Relieve Valve

Level for Boiler

-Electronic level conductivity probe
-Mica- Gasket Glass Assembly for YARWAY Color-Port Water Level Gage
-Sight glass High pressure



■ HEAD OFFICE / FACTORY
1038-2, CHUNGOK-RI, JUCHON-MYUN, KIMHAE,
KYEONG-NAM, KOREA. 621-840.




NARVIK
Port Gauge Glasses

YARWAY
Port Gauge Glasses

FLOWSERVE
Audco Butterfly Valves

mobrey
Hydrastep Electrodes

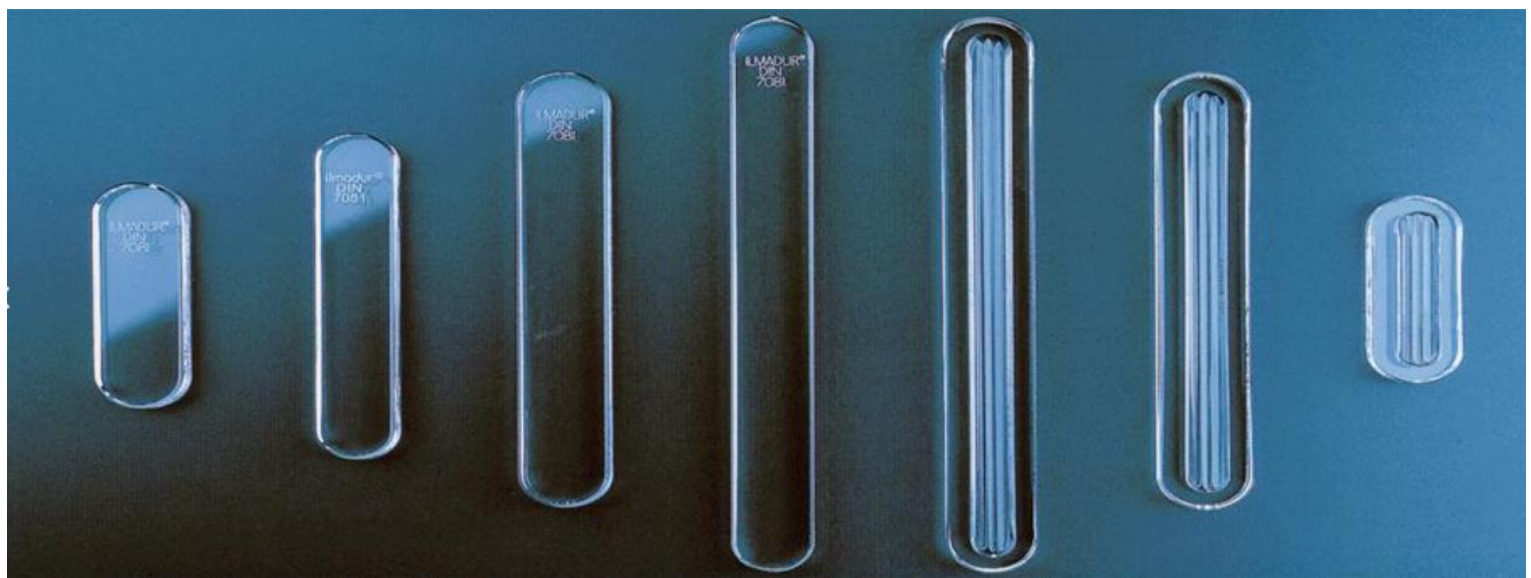



Borosilicate Gauge Glasses

MAXOS®

Borosilicate Gauge & Sight Glasses

NARVIK

Port Gauge Glasses

YARWAY

Port Gauge Glasses




Audco Butterfly Valves

mobrey

Hydrastep Electrodes



Cesare Bonetti Valves & Level Gauges

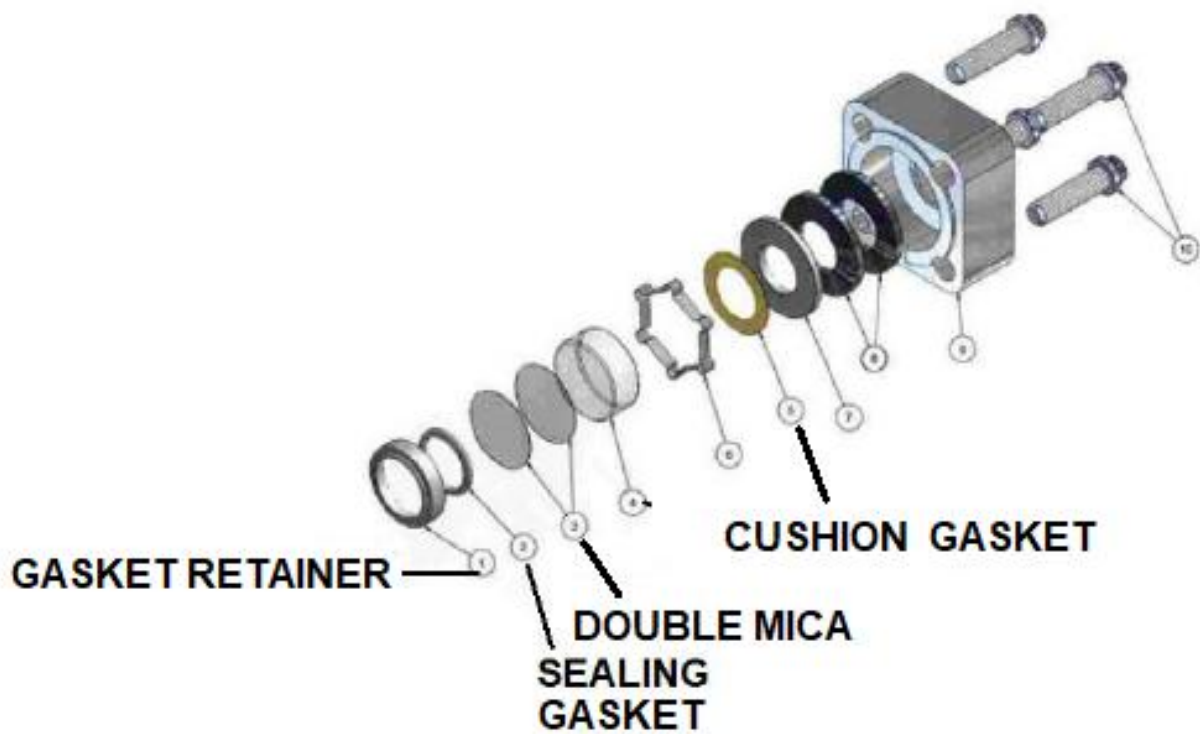

Aluminosilicate Port Gauge Glasses

High quality aluminosilicate port gauge glasses for use in bi-colour level gauges.

Typical Material Properties

Refer to aluminosilicate gauge glasses for typical properties.

Application Data

Applications with significant glass attack (saturated steam, alkaline solutions etc.):

These applications must use mica protection.



maximum temperature

372°C

maximum pressure

22408 kPa (3250 PSIG)

Repair Kit Part No. 7000013156

(Replaces Kit Part No. 923321)

Pressure Rating: 1551 to 3000 P.S.I.

For use with Color-Port Figure Numbers
4591 thru 4595

Glasses are accurately molded and tempered to Yarway specifications. The assembly of glass, mica and gasket is registered precisely in the gasket groove in the body.



At boiler pressures above 300 psig, high temperature water will corrode unprotected gage glass. A thin sheet of high quality ruby mica on the inner surface of each port protects the gage glass from corrosive attack of steam, water and alkalis; however, this protection is not permanent. Continual exposure to high temperature, high pressure water will also corrode the mica shield. The rate at which this corrosion occurs is significantly less than that of glass, and is dependent upon a number of factors. Generally, the higher the operating temperature, the higher the rate of attack.

WARNING: Replace immediately when glass appears white or opaque. Failure to promptly replace the mica-gasket-glass assembly that appears white or opaque can result in catastrophic failure of the glass with violent discharge of hazardous high velocity steam. The discharge of high velocity steam can result in personal injury and property damage may occur.

Yarway recommends each customer establish a preventative maintenance schedule which insures the mica-gasket-glass assembly is replaced previous to the dissolution of the mica shield. In-service gages that have glass which appears white or is opaque, should be isolated immediately and the mica-gasket-glass assembly should be replaced before returning to service. Should any question develop on the condition of the gage glass, the procedure given under the section on preparation for washdown, auxiliary service or gage inspection of the installation, operation and maintenance manual of colour-port water level gages should be used to evaluate port glass condition.

Pressure Measurement

Bourdon tube pressure gauges

The application areas for these pressure gauges, manufactured entirely in stainless steel, are gaseous and liquid aggressive media that are not highly viscous or crystallising, also in aggressive environments. They are suitable for scale ranges from 0/0.6 to 0/1,000 Bar, kg/cm², mBar

Dependant upon the pressure range and the instrument model, overload safety of up to a maximum of 5 x full scale value is possible. To this point the measurement accuracy is maintained. Liquid filling the case ensures a precise instrument display, even with high dynamic pressure loads and vibrations.

Nominal size: 6" 150mm , 4" 100mm , 2-1/2" 63mm

Scale range : kg/ cm² ,bar, psi, inHg , mmHg

Accuracy class : Accuracy $\pm 1.0\%$ of F.S. 100 mm & 150 mm

$\pm 1.6\%$ of F.S. for 63 mm

Protection : IP 65



Diaphragm seal systems

These combinations of diaphragm seals and pressure gauges or pressure sensors feature fast availability. They are particularly suitable for demanding measuring tasks in the pharmaceutical and biotechnology industries, food and beverage industries, and through to the oil & gas, chemical, petrochemical and semiconductor industries.

The diaphragm seal systems can be used for processes with gases, compressed air or vapour, with liquid, paste-like, powdery and crystallising media and also with aggressive, adhesive corrosive, highly viscous, environmentally hazardous or toxic media.

Pressure transmitter

Pressure transmitter is a high performance Pressure transmitter with international leading technology meticulously designed by LEEG instrument, using the world's most advanced monosilicon pressure sensor technology and patent encapsulation technology

Description

Industry pressure transmitter

Sanitary pressure transmitter

4-20mA , 4-20mA+HART



Gauge with Contact

Magnetic snap on gauge is designed for automatic control and signals transfer. When the pressure gets to the set value, the contact opens/closes the circuits. ED series is suitable for harsh and corrosive environment

Gauge pressure switch is a high performance pressure transmitter with international leading technology meticulously designed by LEEG instrument, using

Temperature measurement

Bimetal thermometer

Nominal size 4", 6"

Applications

Chemical and petrochemical industry

Process engineering

Food industry

Measuring ranges

-70....30 °C upto 0....500 °C

Version with rotateable (360 °) and turnable case (90 °) allow the thermometer to be aligned as desired under all installation conditions.



Integrated Temperature Transmitter

Resistance thermometers are suitable for applications Between -196..... +600 °C (dependent on instrument model, sensor element, accuracy class and materials coming into contact with the medium)

Resistance thermometers are available in classes AA, A and B in accordance with IEC 60751.

(ELEMENT) : Type K (CA), J (IC), T,E, R, S, B, PT100



**Explosion Proof
Ultrasonic Flow Meter**

Accuracy : $\leq 1\%$
 Velocity : $0 \sim \pm 10$ m/s, forward and reverse measurement
 Pipe Size : DN32 - DN6000
 Medium Temperature : $-30^{\circ}\text{C} \sim 160^{\circ}\text{C}$
 Power Supply : DC8 ~ 36V, AC10 ~ 30V



**General Electric
Ultrasonic Liquid Flow**

Accuracy : Better than $\pm 1\%$
 Repeatability : Better than 0.2%
 Size : DN15 - DN6000
 Medium Temperature : $-30^{\circ}\text{C} \sim 160^{\circ}\text{C}$
 Velocity : $0 \sim \pm 10$ m



Handheld Flow Meter

Accuracy : Better than $\pm 1\%$
 Repeatability : Better than 0.2%
 Size : DN15 - DN6000
 Medium Temperature : $-30^{\circ}\text{C} \sim 160^{\circ}\text{C}$
 linearity : Better than 0.5%



Radar Level Meter



Explosion-proof Grade Exia IIC T6 Ga/ Exd ia IIC T6 Ga

ULTRASONIC LEVEL METER



Magnetic Level
Made in Natherland

We make magnetic level gauges in many different shapes,
sizes and materials

Material
SS304, SS316

Type switch



Flow Meter




Electromagnetic flowmeter

Electromagnetic flowmeter is a intelligent electromagnetic Flowmeter which is researched and developed


The Specialist for process liquids and slurries
Teflon,PFA,F46,Neoprene,Polyurethan etc
For flowrates upto 380,000 m/h and more
Meter sizes DN3 -DN3000mm



Vortex flowmeter

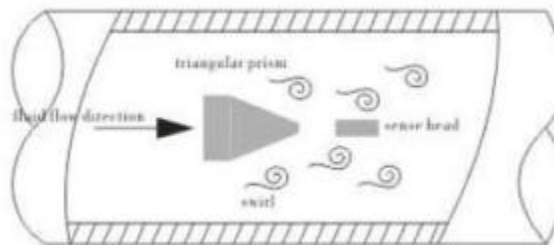



Variable Area Flowmeter



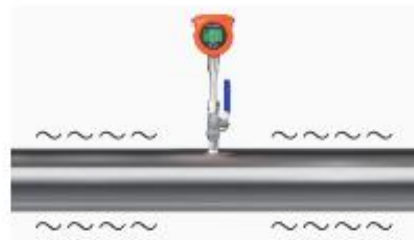


Thermal Mass Flow Meter



Control Valve From Germany

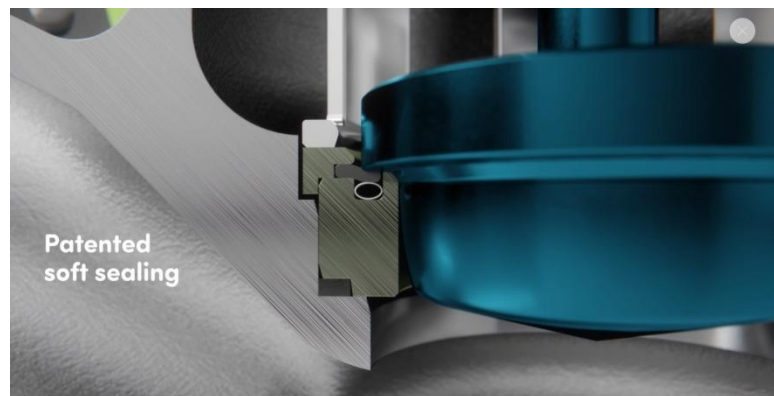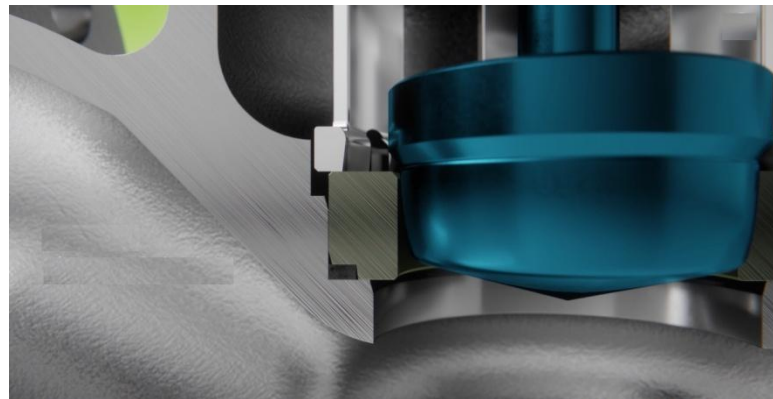

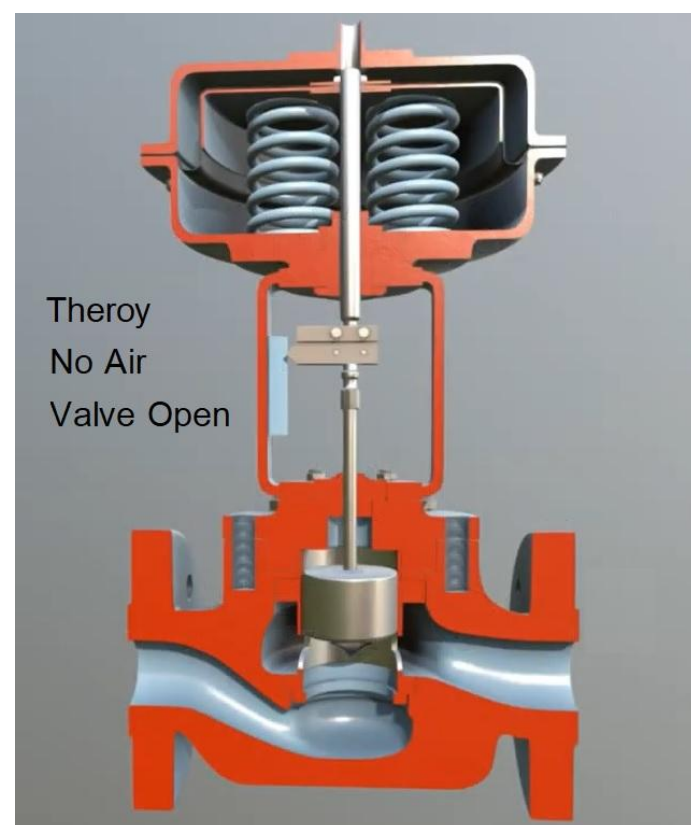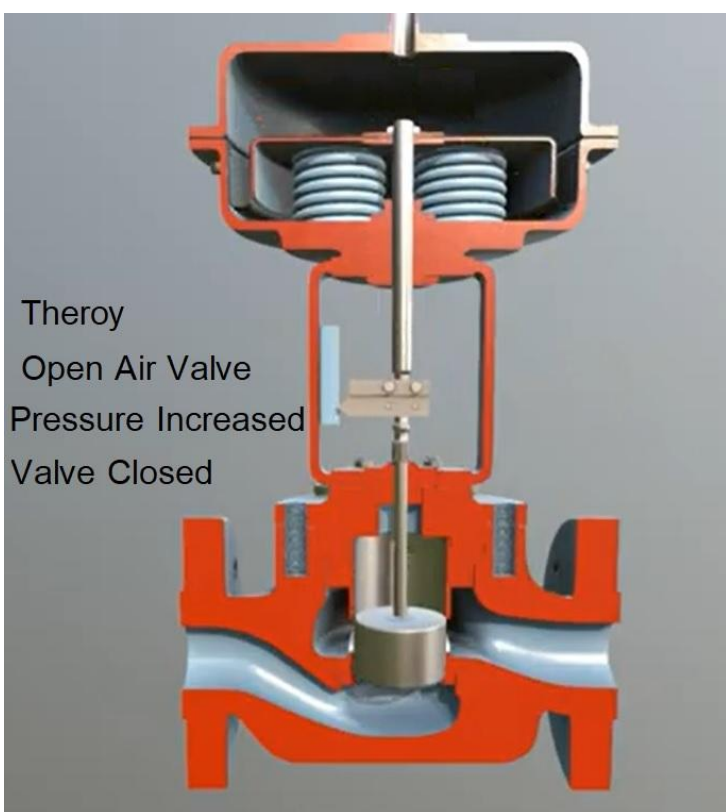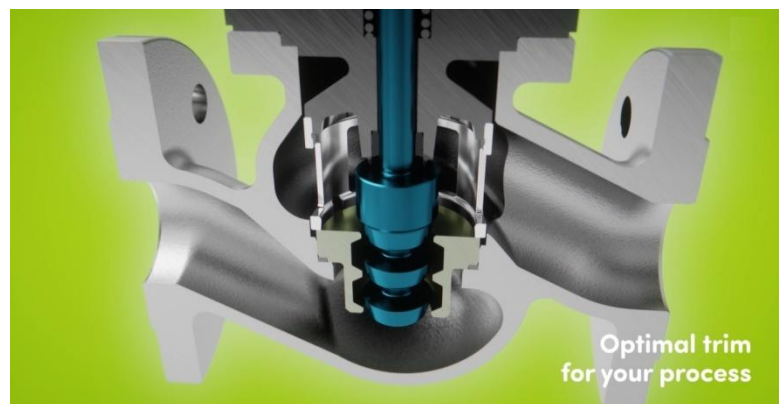

Manual Valve



Bi -color Gauge

Type BU green/red

Sight glass Bi color gauge

Pressure Rate 3000 PSI (207 bar)

Temp Rate 370 °C

Maker Levelstate UK

Levelstate Colour Port Type Water Level Gauges(DWLG) provide a direct reading of the water level and are suitable for steam/water applications. Levelstate Gauges are reliable and maintenance free thereby minimising operating costs for the user. Levelstate DWLG is available in various pressure ratings, which used along with the high intensity illuminating device and accessories makes it one of the most reliable and user friendly systems available. Gauge Type 300 is available for pressure rating upto 207 bar @ 370°C.




Level



IGEMA GmbH

Level for Boiler

Instrument Level measurement for Boiler

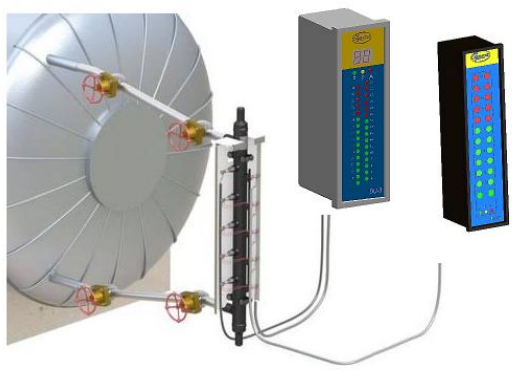

Electronic conductivity probe

Allowable pressure	PS [bar]	32	50	80	100	160	210
Allowable temperature	TS [°C]	239	265	296	312	348	370
Probe	Type						
		With connection box			Without connection box		
	Article no.	15-13243			15-00790		
	Insulator	Ceramics					
Conductivity		50 mm					


Specification

Zirconia insulator
Stainless steel components
Helium leak tested

COMPLYMAX CO.,LTD , TEL 095-803-6047 ,Email 9dcomplymax@gmail.com

Bi -color Gauge

Type BU green/red
Sight glass Bi color gauge
Pressure Rate 3000 PSI
Temp Rate 369 °C
Maker IGEMA Germany

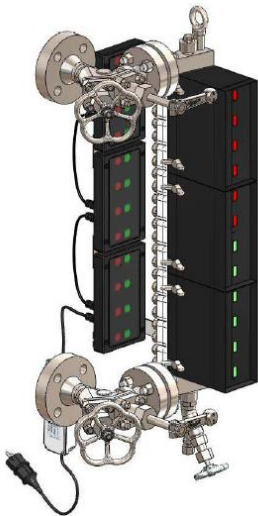

Transparent level gauge



TG200 with LED Secure Slim

12
13
14
15
16
17
18
19
20
21
22
23
24
25
26

Fixed connection	Swivel connection

Breather Valve & Breather Valve with Flame Arrester



In-Line Detonation Flame Arrester



Gauge Hatch



Emergency Vent Cover



Contact US

Waratorn Ajalanant

วราธร อจลันนท์

COMPLYMAX CO.,LTD.

086-360-4419