












- | | |
|---|--|
|  Ground |  Digital Pin |
|  Power |  Analog Pin |
|  LED |  Other Pin |
|  Internal Pin |  Microcontroller's Port |
|  SWD Pin |  Default |

 **MAXIMUM** current per I/O pin is 20mA



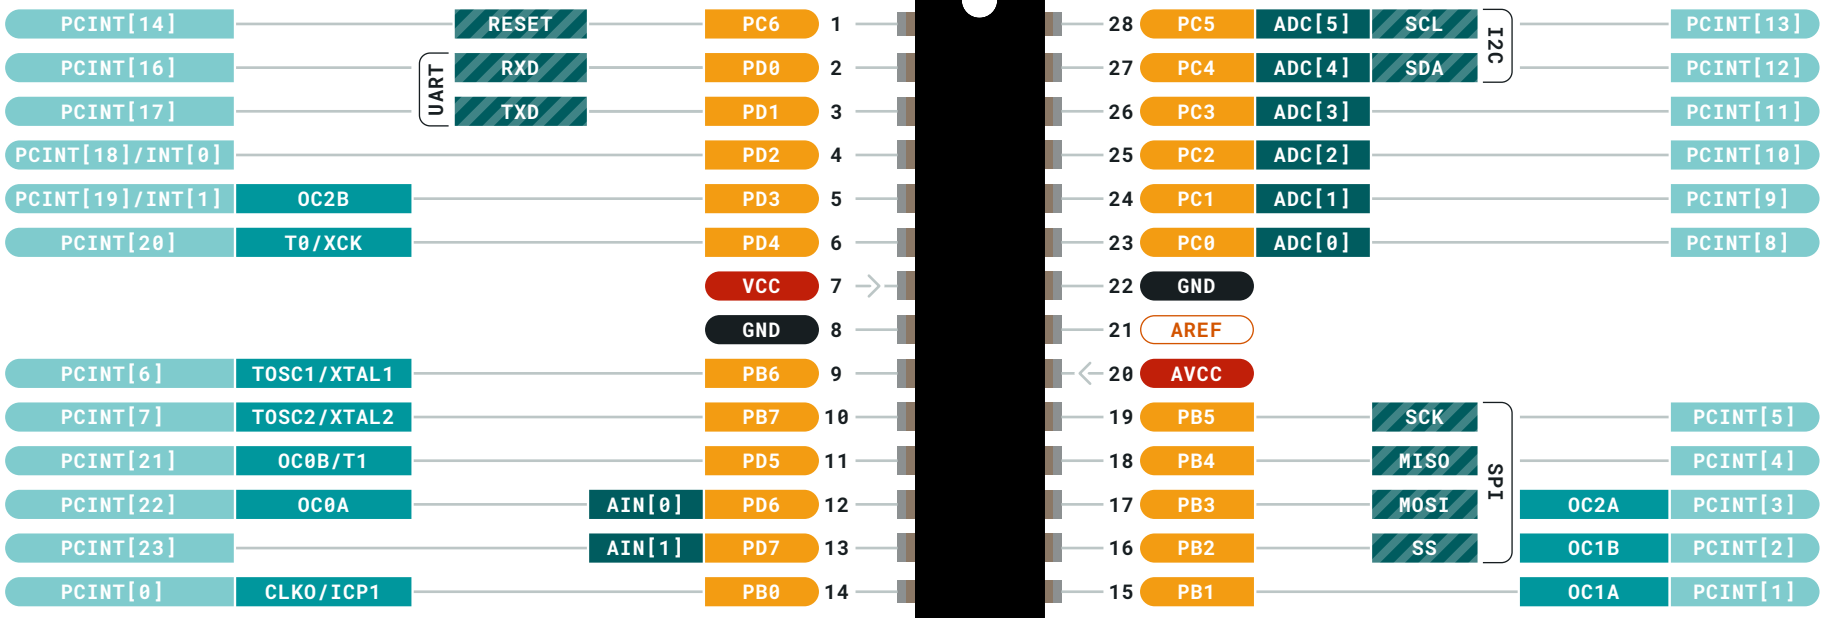

Ground

Power

LED

Internal Pin

SWD Pin

Digital Pin

Analog Pin

Other Pin

Microcontroller's Port

Default

Analog

Communication

Timer

Interrupt

Sercom

MAXIMUM current per I/O pin is 20mA



This work is licensed under the Creative Commons Attribution-ShareAlike 4.0 International License. To view a copy of this license, visit <http://creativecommons.org/licenses/by-sa/4.0/> or send a letter to Creative Commons, PO Box 1866, Mountain View, CA 94042, USA.