

RFID Kit With Mifare RC522 RFID Reader Module

Introduction

MFRC522-based RFID module, easy to use and low cost, designed for reader development and RF card terminal applications. Operates at 3.3V with SPI interface, requiring only a few wires for stable and reliable integration with CPU boards.

Sunfounder

Key Features:

Secure assembly and easy pin access

01

MFRC522 RFID Chip: Based on original Philips MFRC522, 13.56MHz operating frequency.


02

Easy Integration: SPI interface with pin headers for quick plug-in use in reader modules.

03

Stable Performance: 3.3V power supply with up to 10Mbit/s data transfer rate, ideal for RF card terminal development.

Sunfounder

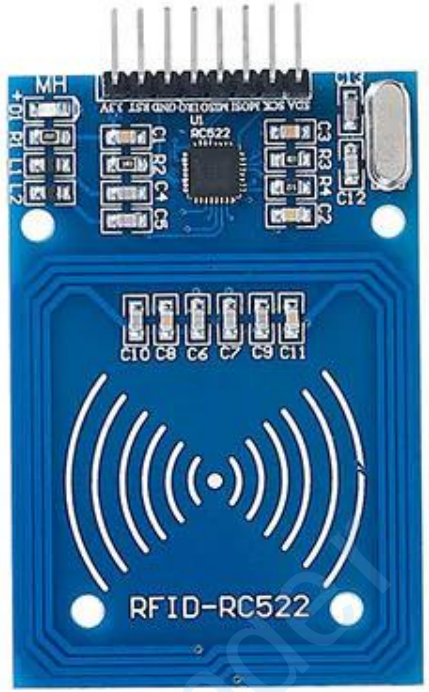




With pin header (not need to be soldered by yourself)




RFID

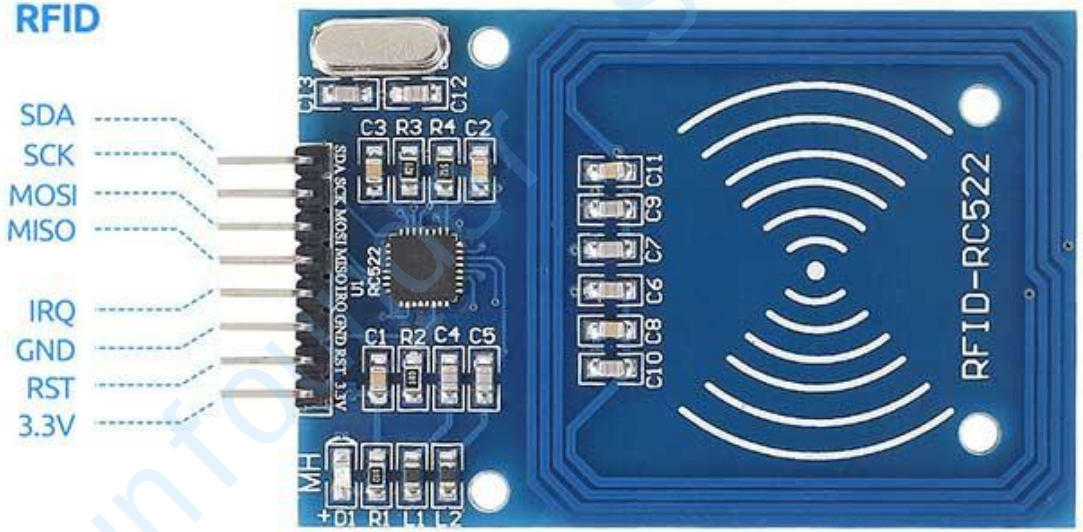




RF-ID-RC522

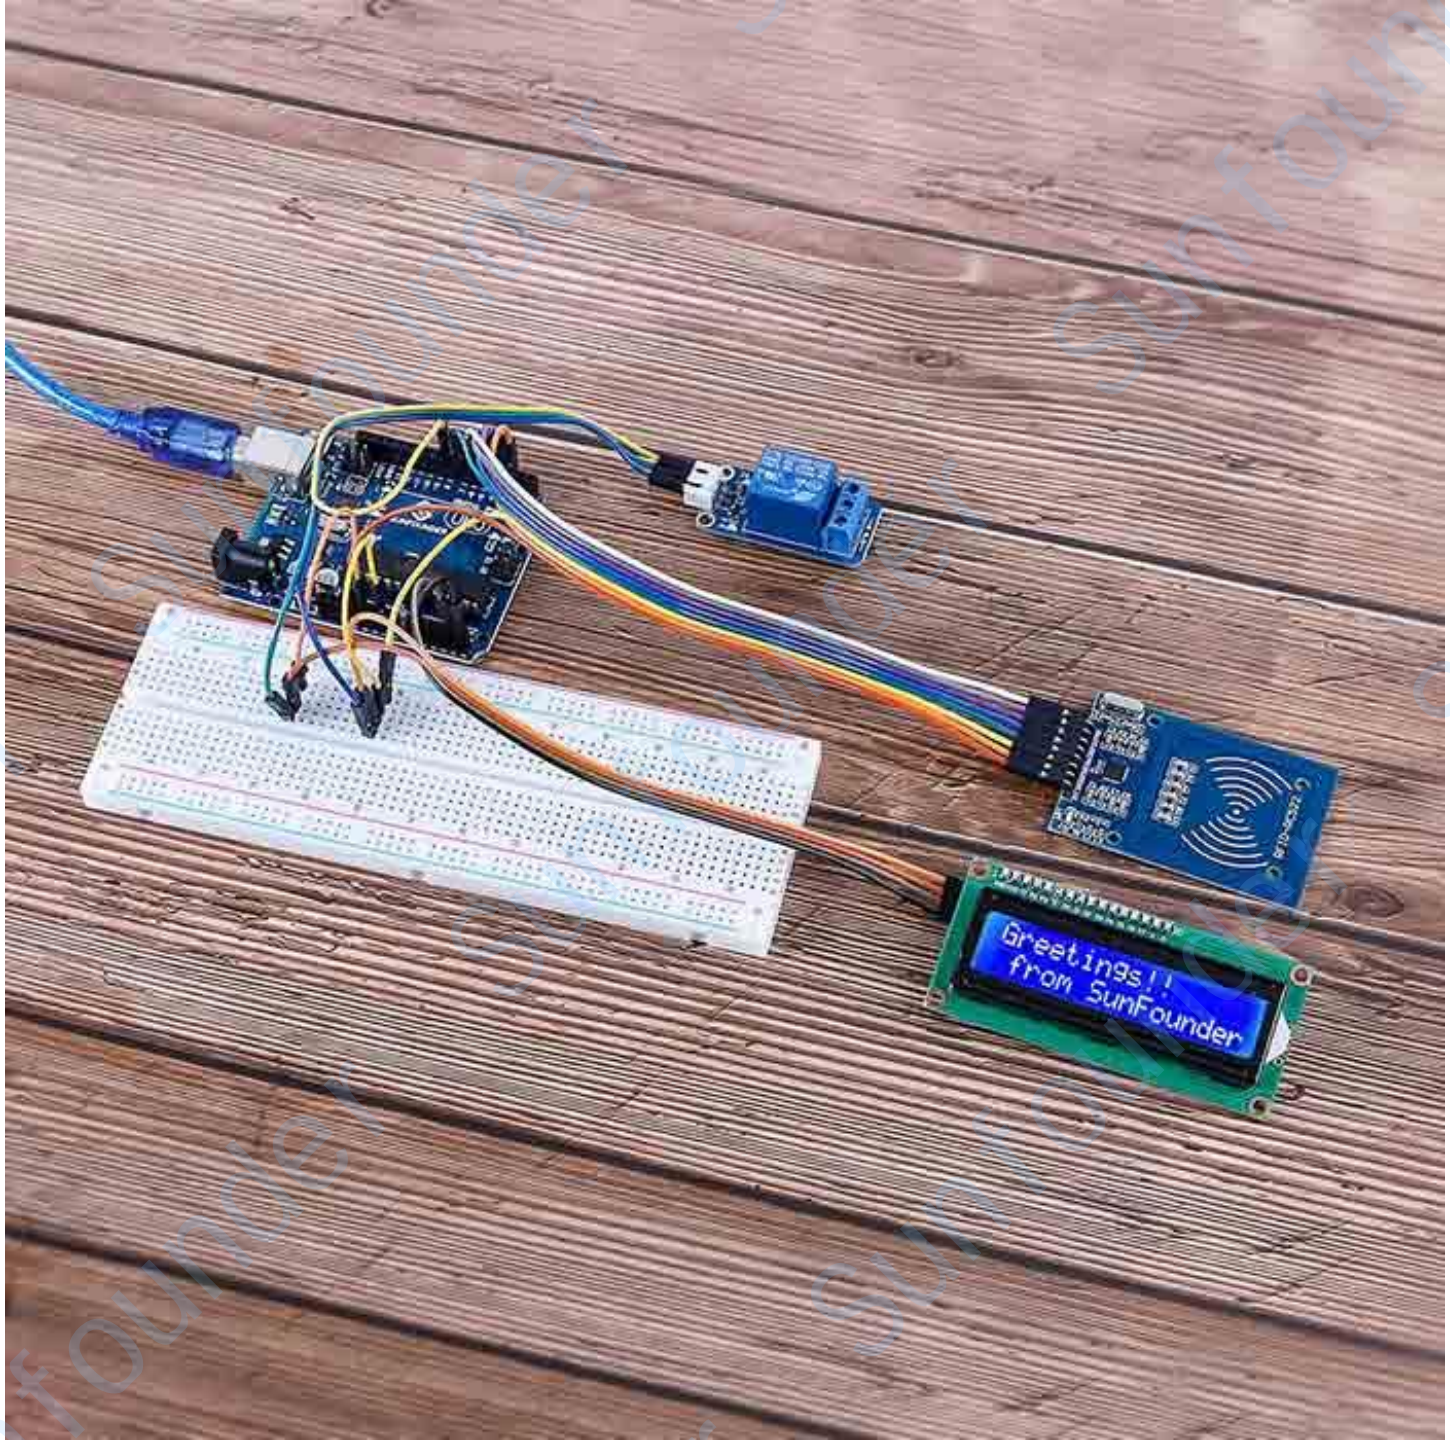
Greetings!!
from SunFounder

Package List

- RFID RC522 module x 1
- RFID key fob x 1
- RFID Card x 1



Sunfounder

Specification

- Operating current :13-26mA/DC 3.3V
- Idle current :10-13mA/DC 3.3V
- Sleep current: <80uA
- Peak current: <30mA
- Operating Frequency: 13.56MHz
- Read Range: 0 ~ 35mm (mifare1 card)
- Size: 40mm×60mm
- Environmental Operating temperature: -20-80 degrees Celsius
- Environmental Storage Temperature: -40-85 degrees Celsius
- Relative humidity: relative humidity 5% -95%
- Module interfaces SPI: Data transfer rate maximum 10Mbit/s
- Supported card types: Mifare1 S50, Mifare1 S70, MIFARE Ultralight, Mifare Pro, and MIFARE DES Fire.

Sunfounder



Thank you for your time and attention.

Sunfounder