

Distributed by:




JAMECO[®]
ELECTRONICS

www.Jameco.com ♦ 1-800-831-4242

The content and copyrights of the attached
material are the property of its owner.

Jameco Part Number 161656

PN#161656

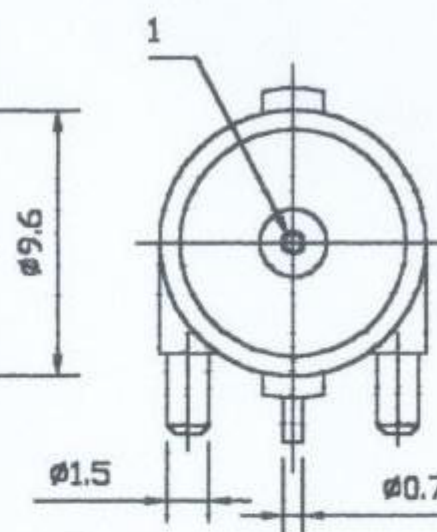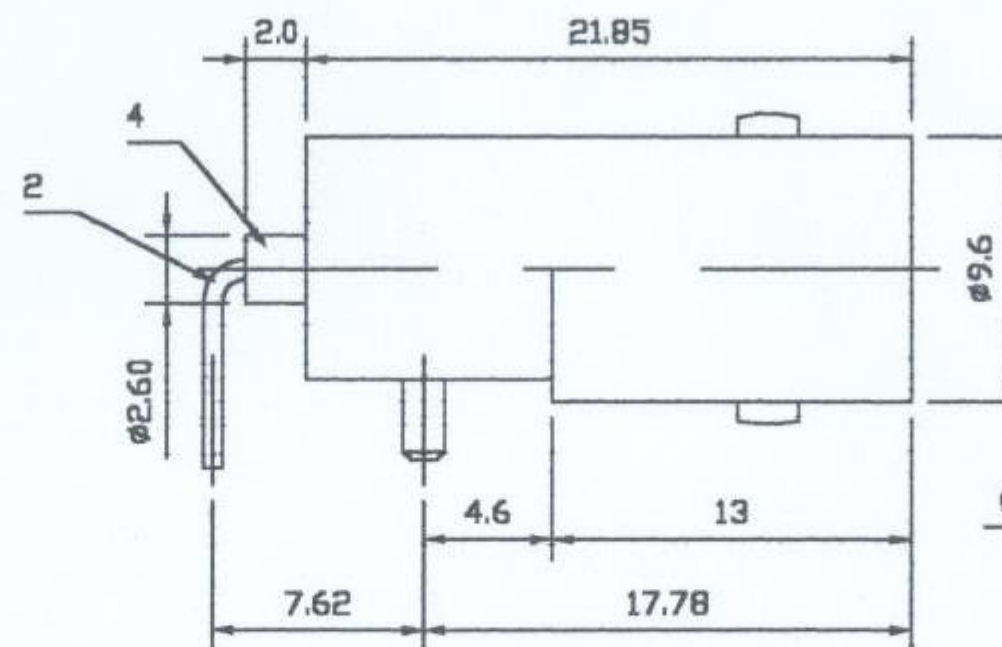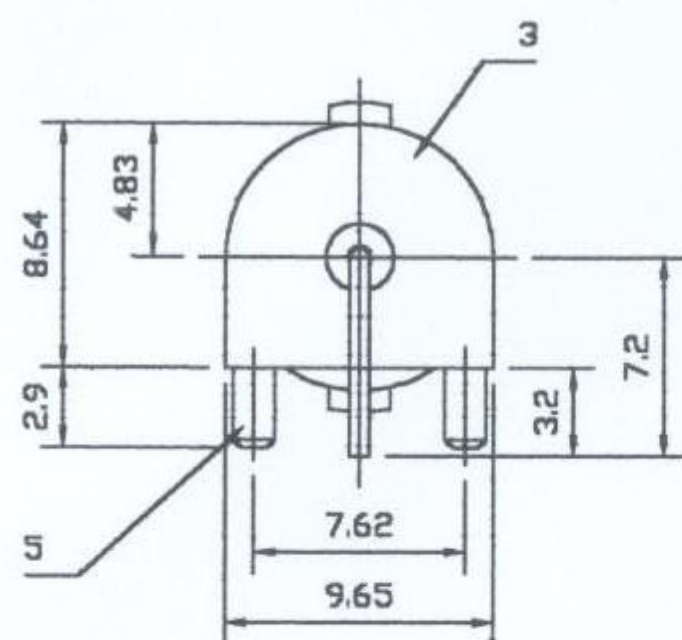

ELECTRICAL SPECIFICATIONS:

Voltage rating: AC 500V

With standing voltage: AC 1,500V one minute
insulation resistance: 1,000M Ω min at DC 500V


Contact resistance: $3\text{m}\Omega$ max at DC 1A

Frequency range: 0-4GHz


VSWR:1.2max.0-2GHz

Impedance: 50 & 75 Ω Versions

INTERFACE PER MIL-C-39012C

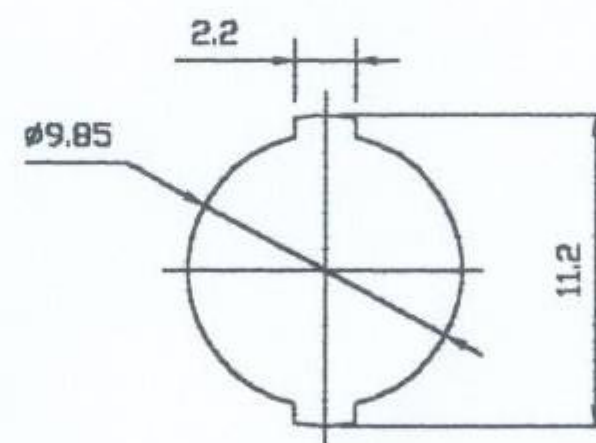

RECOMMENDED PANEL CUTOUT

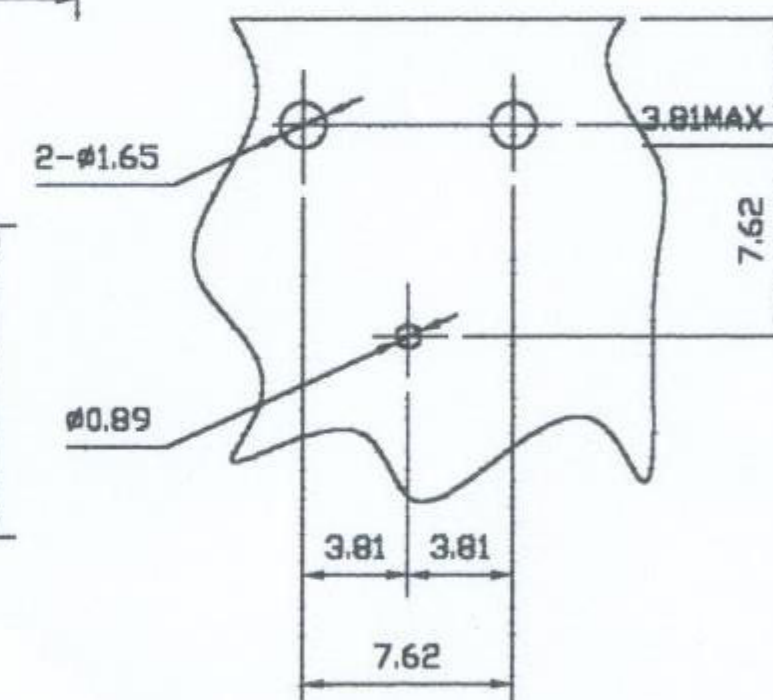

RECOMMENDED PCB LAYOUT

					DIMENSIONS ARE IN MILLIMETERS					
					UNLESS OTHERWISE SPECIFIED TOLERANCES 0.5-5 =±0.2 6-30 =±0.4 30-120 =±0.6 120-315 =±1 315-1000 =±1.6 1000-2000 =±2.4					
5	MOUNTING POST	BRASS	TIN	1						
4	INSULATOR	PE-606	WHITE	1						
3	BODY	ZINC	NICKEL	1						
2	CONATCT SOLDER TAIL	PHOSPHOR BRONZE	TIN	1						
1	CENTER CONTACT	PHOSPHOR BRONZE	GOLD	1						
NO	DESCRIPTION	MATERIAL	FINISH	QTY	SCALE		ISSUE			