

CORPORATE PROFILE — TILE ADHESIVE SOLUTIONS

BUILD TO **BOND.** DESIGNED TO LAST.

A professional profile for tile installation, architectural surfaces and project applications — engineered for the bond beneath every beautiful surface.



Flais Granito
Manufactured by Keval Granito LLP
Morbi, Gujarat — India

CT 1052 — CT 1062
CT 1072 WHITE

The foundation **behind** every beautiful surface.

Architecture is evolving. Tiles are becoming larger, surfaces more sophisticated, and installation demands increasingly technical.

At Flais Granito, we believe the performance of a premium surface begins beneath the surface itself. Our tile adhesive solutions are engineered around the critical bond between substrate and architectural surface — bringing together adhesion, workability, durability and performance for demanding installations.

From ceramic and vitrified tiles to large-format porcelain, marble, natural stone and slabs, Flais Granito builds solutions around modern tile formats, professional installation practice and project requirements. Because a great surface deserves a great foundation.



FLAIS
GRANITO

T1000
Porcelain Tile Up To 800mm

Suitable For Internal And External Use
Ready To Mix
Excellent Water Resistance.
High Strength,
Polymer Modified Adhesive.

ABOUT US

WHO WE ARE

Flais Granito is an architectural-surface brand extending its expertise beyond the tile itself. Our approach considers the complete installation environment — the tile, adhesive, substrate, installation method and finished surface. Adhesive is not merely a fixing material; it is the engineered interface connecting the architectural surface to the substrate.

Our Vision

TRUSTED BY DESIGN

To establish Flais Granito as a trusted name in architectural surface solutions — combining product performance, technical understanding, design sensibility and dependable service.

Our Mission

BUILT FOR EVERY FORMAT

To develop and offer reliable tile installation solutions that complement the evolution of ceramic, vitrified, porcelain, marble, natural stone and large-format surfaces.

Our Values

- | | | |
|----|--------------------|---|
| 01 | PERFORMANCE | Built around measurable technical requirements — not marketing claims. |
| 02 | INNOVATION | Solutions engineered for evolving tile formats and installation challenges. |
| 03 | CONSISTENCY | Quality-oriented manufacturing and tightly controlled processes. |
| 04 | APPLICATION | Products designed with real site conditions in mind. |
| 05 | TRUST | Clear specifications, responsible communication, dependable support. |

THE FLAIS DIFFERENCE

WE DON'T JUST LOOK AT THE TILE.

We look at the **bond** — the balance of adhesion, polymer modification, workability, open time, slip resistance and flexibility, tuned to the intended application.

PERFORMANCE AREA	WHAT IT MEANS ON SITE
HIGH ADHESION	Strong bonding performance for demanding tile and stone applications, on floors and walls alike.
POLYMER MODIFICATION	Engineered to enhance adhesion, flexibility and overall long-term product performance.
WORKABILITY	Balanced handling characteristics that support efficient, professional application.
OPEN TIME	An appropriate working window under specified site conditions.
FLEXIBILITY	Relevant to demanding applications where movement or vibration may occur.

A modern cementitious tile adhesive is an engineered dry-mix system — its performance shaped by **cementitious binders, graded aggregates, polymer modification, water-retention technology, rheology modifiers** and performance additives. The objective is always the right balance for the intended application, not simply the highest single number.

TECHNICAL LANGUAGE

PERFORMANCE THAT CAN BE MEASURED

01 – Bonding

TENSILE ADHESION

Bonding strength between the adhesive and the tile / substrate system.

02 – Bonding

SHEAR ADHESION

Resistance to forces acting parallel to the bonded surface.

03 – Working Time

OPEN TIME

Available working period after application, under specified conditions.

04 – Working Time

ADJUSTABILITY TIME

Period available for positioning and fine adjustment of tiles.

05 – Working Time

POT LIFE

Usable working life of the mixed adhesive before it begins to set.

06 – Application

SLIP RESISTANCE

Control of tile movement, particularly important on vertical applications.

07 – Application

BED THICKNESS

Recommended adhesive-bed range for the product and application.

08 – Approach

RIGHT BALANCE

Classification and certification claims are always stated exactly as supported by current technical data sheets and test certificates.

THE RANGE

THE ADHESIVE PORTFOLIO



CT 1052

HIGH-PERFORMANCE TILE ADHESIVE

Ceramic tiles · Wall & floor applications · Demanding installations



CT 1062

FOR PORCELAIN TILE UP TO 80×160CM

Porcelain · Vitrified tiles · Large-format · Interior & exterior



CT 1072 White

FOR MARBLE & SLAB TILES

Marble · Slabs · Natural stone · Glass mosaic · Tile-on-tile

The portfolio is structured around real application requirements and site performance needs — from everyday ceramic wall and floor work through to large-format porcelain and premium marble and slab installations. Product classification and certification claims are always stated exactly as supported by the current technical data sheet and applicable test certificates.

CT 1052

FOR CERAMIC WALL & FLOOR

High-performance tile adhesive for demanding installations.

Key Properties

- Suitable for internal and external use
- Ready to mix
- Excellent water resistance
- High strength
- Polymer modified adhesive

Ideal For

CERAMIC TILES

WALL APPLICATIONS

FLOOR APPLICATIONS

DEMANDING INSTALLS

A high-polymer-modified cementitious adhesive positioned for everyday and demanding ceramic wall and floor work — from residential bathrooms and kitchens to commercial floors that need dependable, repeatable bond strength.

CT 1062

FOR PORCELAIN TILE UP TO 80×160CM

Engineered for modern porcelain and vitrified formats.

Key Properties

- Suitable for internal and external use
- Ready to mix
- Excellent water resistance
- High strength
- Polymer modified adhesive

Ideal For

PORCELAIN

VITRIFIED TILES

LARGE-FORMAT

INTERIOR & EXTERIOR

A high-polymer-modified cementitious adhesive developed for modern porcelain and vitrified tile applications — built to hold large-format panels flat, true and firmly bonded across interior and exterior installations.

FLAIS
GRANITO

CT 1062
Porcelain Tile Up To 80x160cm

Suitable For Internal And External Use
Ready To Mix
Excellent Water Resistance.
High Strength,
Polymer Modified Adhesive.

CT 1072 White

FOR MARBLE & SLAB TILES

Premium adhesive for natural stone & large-format slabs.

Ideal For

MARBLE

SLABS

NATURAL STONE

GLASS MOSAIC


TILE-ON-TILE

SWIMMING POOLS

A premium, water- and frost-resistant, high-polymer-modified cementitious wall and floor tile adhesive — specially formulated for mosaic, ceramic and glass mosaic work, and equally suited to vitrified, marble, granite, quartz stone, terrazzo and other natural stone in interior and exterior locations, including swimming pools and tile-on-tile applications.

Technical Data — As Supplied

Pot life	2 hrs 30 min
Open time	35 min
Adjustable time	45 min
Bed thickness	Up to 12 mm
Tensile adhesion	3.94 N/mm ²
Shear adhesion (24 hrs)	6.00 N/mm ²
Trafficable time	24 hrs
Slip	No slip
Shelf life	12 months, sealed

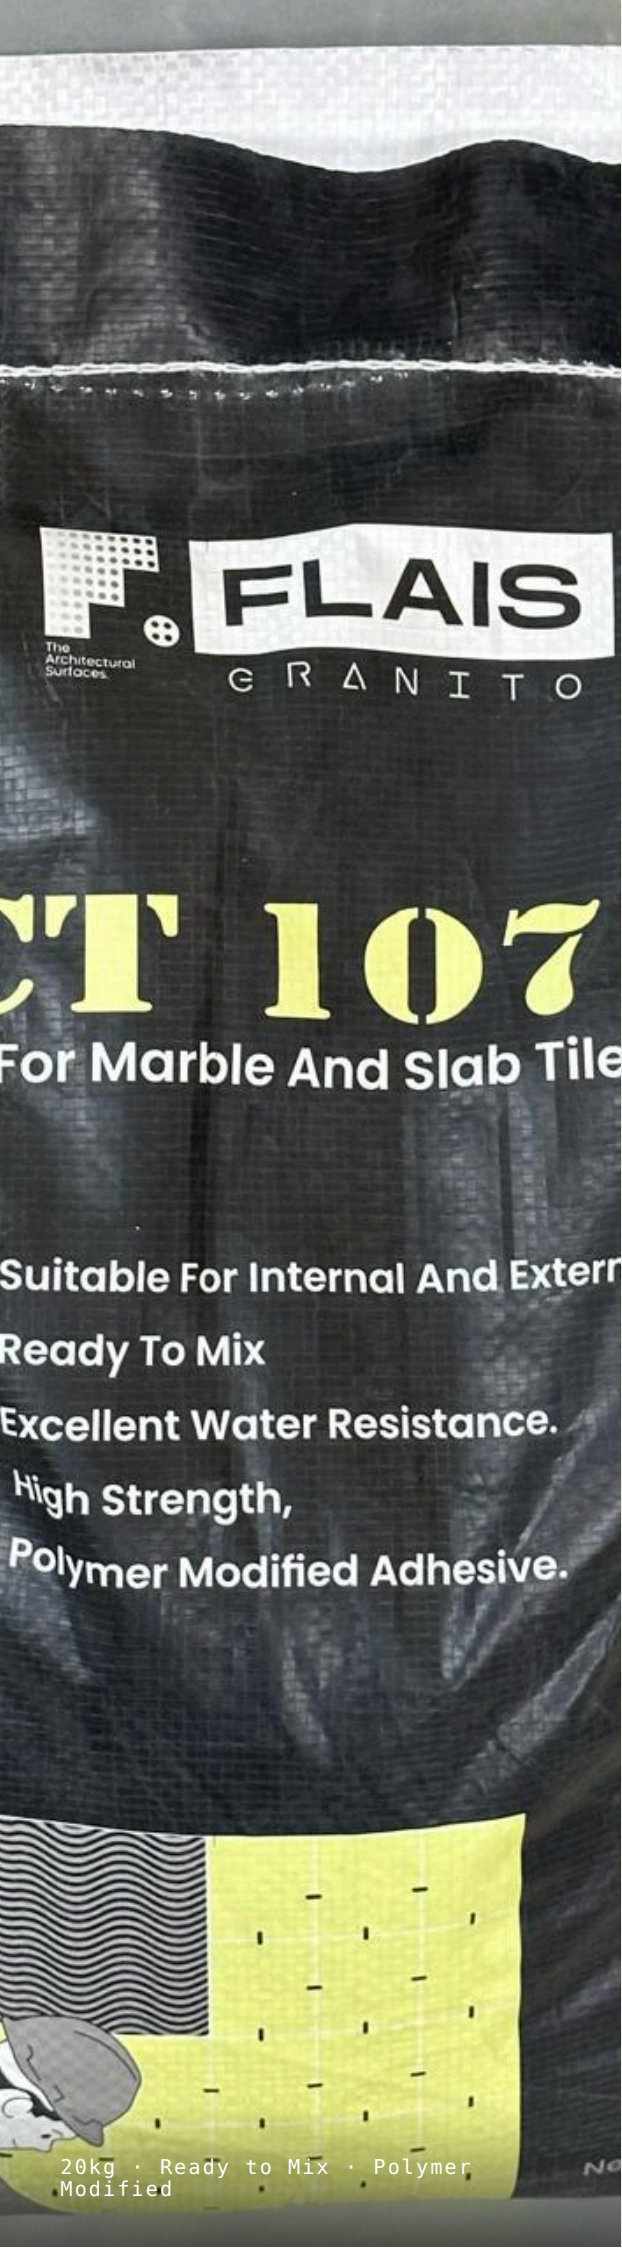

WHERE IT PERFORMS

DESIGNED FOR MODERN TILE FORMATS

The evolution of the tile industry has created a new installation environment. Projects increasingly specify large-format vitrified tiles, porcelain surfaces, marble and natural stone, slabs, glass mosaics and tile-on-tile applications. As formats grow, successful installation depends increasingly on substrate preparation, adhesive selection, trowel selection, coverage, back-buttering where required, and movement-joint planning.

The future of tile is not only about bigger surfaces — it's about smarter installation.

Application Environments

RESIDENTIAL

Living spaces, kitchens, bathrooms, balconies, floors and walls.

COMMERCIAL

Retail, offices, showrooms and commercial buildings.

HOSPITALITY

Hotels, restaurants and premium interiors.

LARGE-FORMAT

Porcelain, vitrified and large-format surface projects.

NATURAL STONE

Marble, granite, quartz stone and terrazzo.

SPECIALISED

Wet areas, swimming pools and tile-on-tile, per product suitability.

ON SITE

THE FLAIS INSTALLATION PHILOSOPHY

Right tile. Right adhesive. Right application. Seven disciplined steps, from substrate to finish, that professional applicators follow on every Flais installation.

01	PREPARE	Ensure the substrate is clean, sound, stable and appropriately prepared.
02	SELECT	Choose the adhesive according to tile type, format, substrate and application environment.
03	MIX	Follow the specified water demand and mixing procedure.
04	APPLY	Use the appropriate notched trowel and application method.
05	BOND	Ensure adequate adhesive coverage and appropriate bedding of the tile.
06	CURE	Respect the specified open time, adjustment time, curing and traffic conditions.
07	FINISH	Complete the installation with appropriate jointing and movement-joint practices.

WHO WE SERVE

BUILT AROUND YOUR BRIEF

FOR ARCHITECTS & DESIGNERS

01 / Design

Today's architects and designers are pushing the boundaries of surface design — larger formats, seamless visual language, sophisticated materials and natural-stone aesthetics. Flais Granito complements that vision with installation solutions engineered around the technical demands of modern surfaces. Because design shouldn't end at the tile.

FOR CONTRACTORS & APPLICATORS

02 / Site

On site, performance means more than laboratory numbers — it means predictable workability, appropriate open time, controlled slip, reliable adhesion, consistent mixing and efficient installation. Flais Granito is committed to products and technical resources that help professional applicators work with greater confidence, on schedule.

FOR PROJECTS & INSTITUTIONS

03 / Scale

For project, developer and government/institutional applications, adhesive selection is based on the complete installation requirement — tile format and type, substrate, interior/exterior exposure, wet-area conditions, movement or vibration, application method and required performance. Flais Granito is built to specify with confidence at scale.

Quality Promise

Every adhesive solution must ultimately perform in the hands of the applicator, under real project conditions. Our approach is built on controlled raw-material selection, disciplined formulation, rigorous testing, batch consistency, clear technical documentation and continuous field feedback — with certification and conformity statements published only against the latest applicable laboratory reports and technical data sheets.



BUILD TO BOND. DESIGNED TO LAST.

Flais Granito — Mfg. by Keval Granito LLP

Survey No. 151/p1, Unchi Mandal, Halvad Highway, Morbi, Gujarat 363642, India

info@flaisgranito.com | www.flaisgranito.com