

BOIPUSO PODCAST NETWORK (POTCHEFSTROOM)

CMPG 325 INDIVIDUAL PROJECT

MILESTONE 2 – CLIENT IMPLEMENTATION REVIEW

KARABO SHIBAMBO

46221042

CMPG325-2026-132

CLIENT ID : CLJ-132

INDUSTRY : MEDIA

ASSIGNED BLOCK : 10.51.0.0/16

02 OCTOBER 2026

Physical Config Desktop Programming Attributes

Command Prompt

```
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 0ms, Average = 0ms

C:\>ping 10.51.50.1

Pinging 10.51.50.1 with 32 bytes of data:

Request timed out.
Reply from 10.51.50.1: bytes=32 time=32ms TTL=254
Reply from 10.51.50.1: bytes=32 time<1ms TTL=254
Reply from 10.51.50.1: bytes=32 time<1ms TTL=254

Ping statistics for 10.51.50.1:
    Packets: Sent = 4, Received = 3, Lost = 1 (25% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 32ms, Average = 10ms

C:\>ping 10.51.100.2

Pinging 10.51.100.2 with 32 bytes of data:

Request timed out.
Reply from 10.51.100.2: bytes=32 time<1ms TTL=253
Reply from 10.51.100.2: bytes=32 time=11ms TTL=253
Reply from 10.51.100.2: bytes=32 time<1ms TTL=253

Ping statistics for 10.51.100.2:
    Packets: Sent = 4, Received = 3, Lost = 1 (25% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 11ms, Average = 3ms


C:\>ping 10.51.40.10

Pinging 10.51.40.10 with 32 bytes of data:

Request timed out.
Reply from 10.51.40.10: bytes=32 time<1ms TTL=126
Reply from 10.51.40.10: bytes=32 time=23ms TTL=126
Reply from 10.51.40.10: bytes=32 time=10ms TTL=126

Ping statistics for 10.51.40.10:
    Packets: Sent = 4, Received = 3, Lost = 1 (25% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 23ms, Average = 11ms

C:\>
```

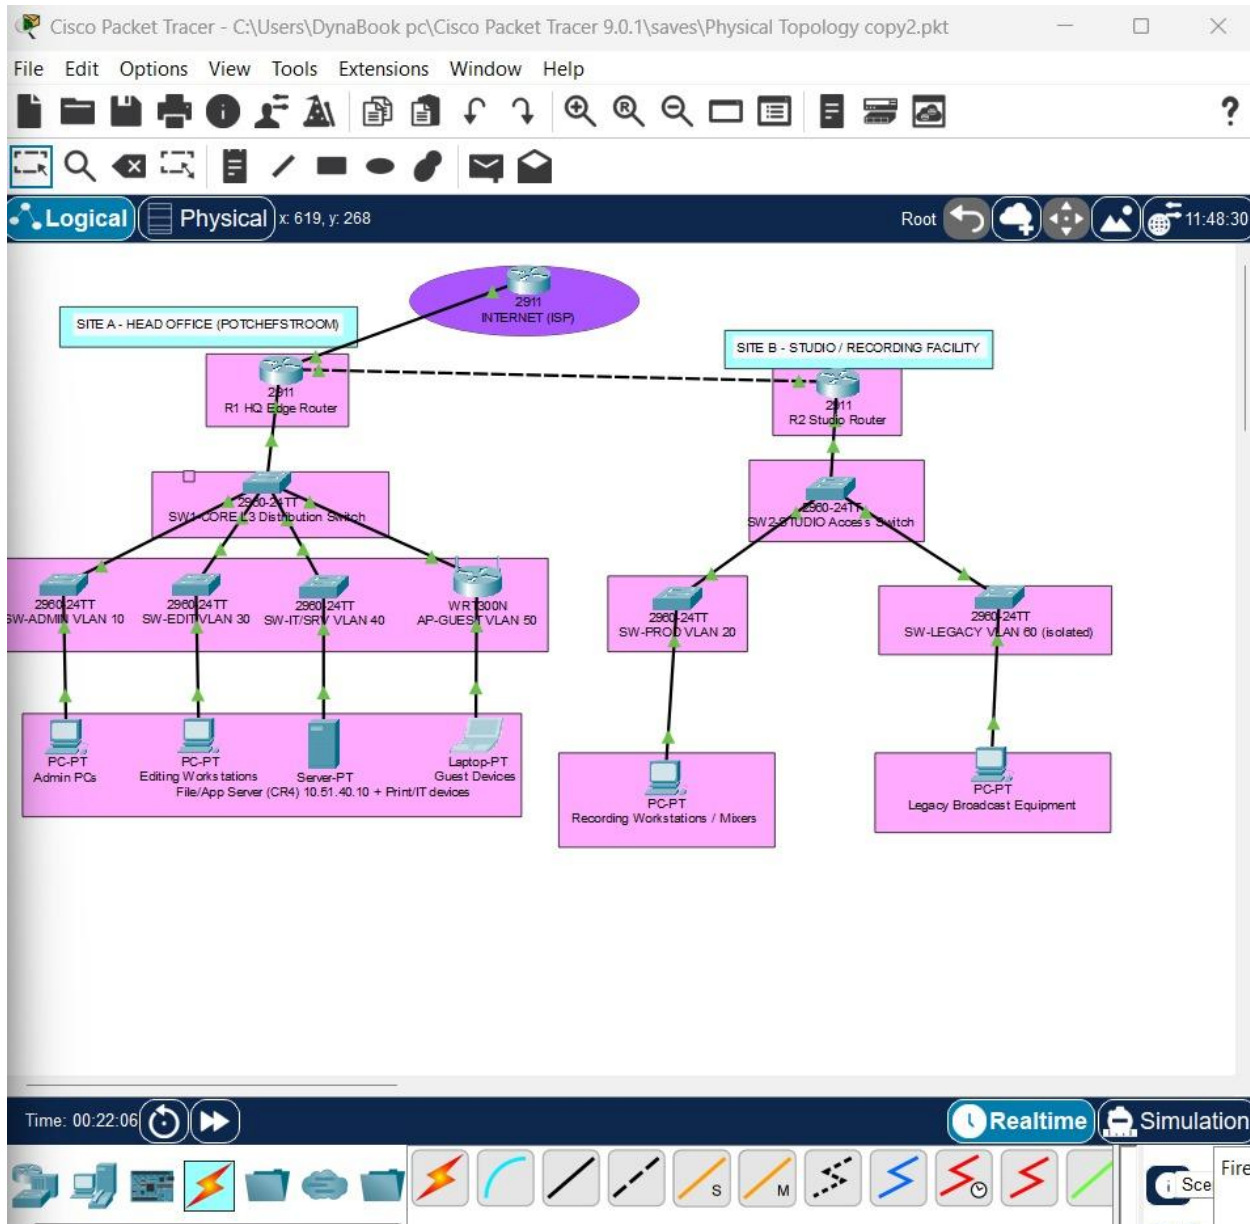

Command Prompt

Cisco Packet Tracer PC Command Line 1.0

C:\>ipconfig

FastEthernet0 Connection:(default port)

Connection-specific DNS Suffix...:

Link-local IPv6 Address.....: FE80::2D0:58FF:FEE7:D612

IPv6 Address.....: ::

IPv4 Address.....: 192.168.0.100

Subnet Mask.....: 255.255.255.0

Default Gateway.....: ::

192.168.0.1

Bluetooth Connection:

Connection-specific DNS Suffix...:

Link-local IPv6 Address.....: ::

IPv6 Address.....: ::


IPv4 Address.....: 0.0.0.0


Subnet Mask.....: 0.0.0.0

Default Gateway.....: ::

0.0.0.0

C:\>

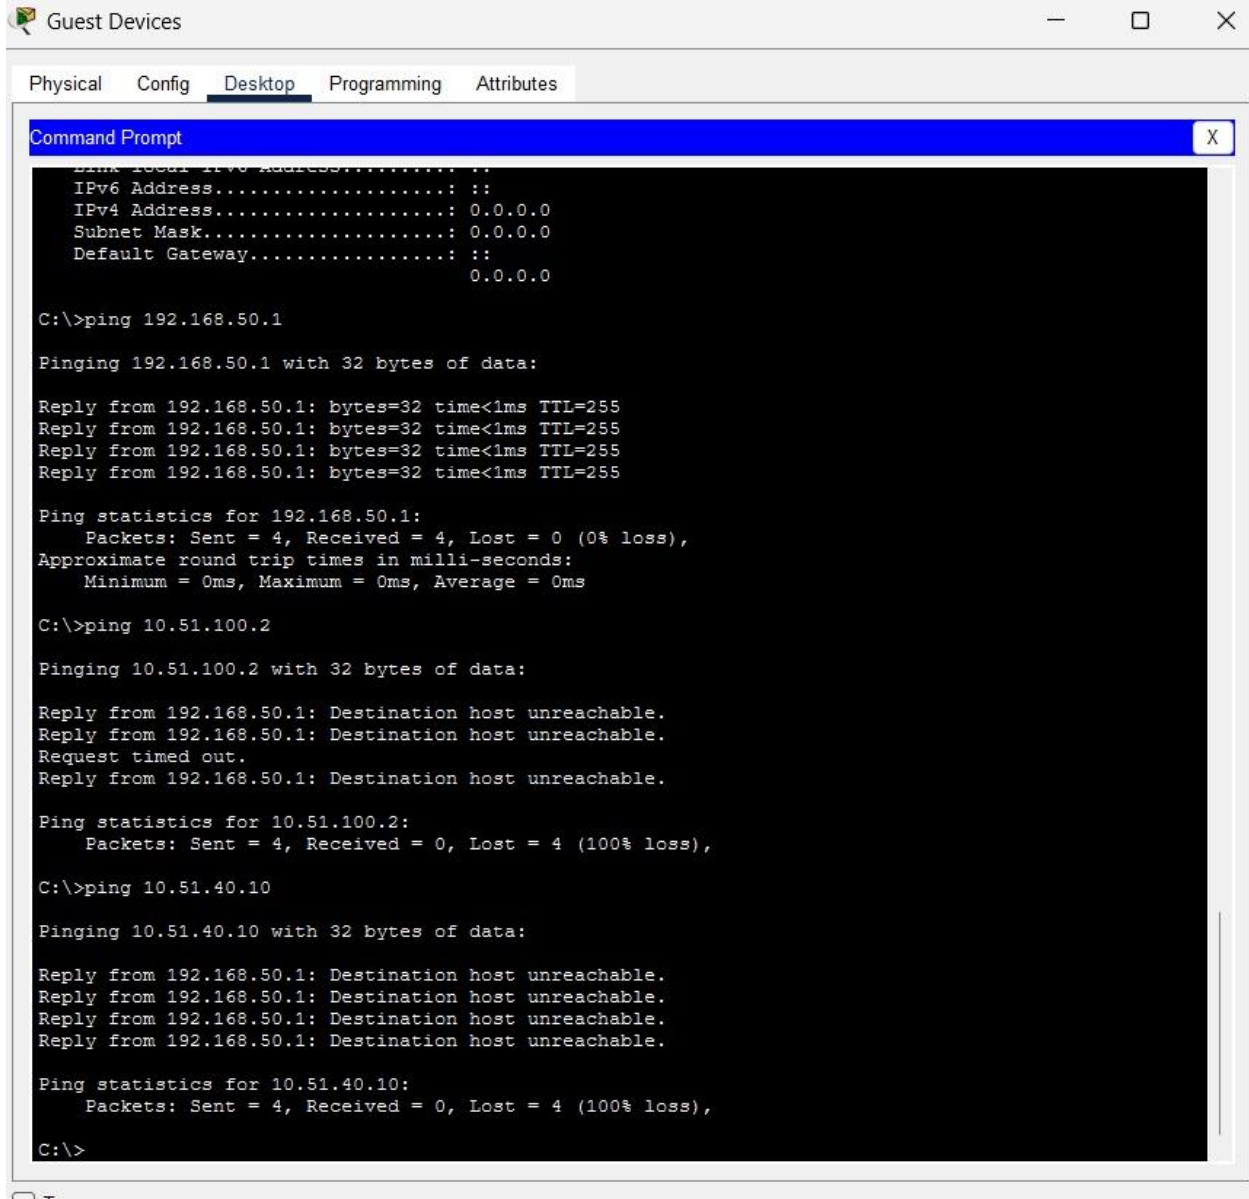

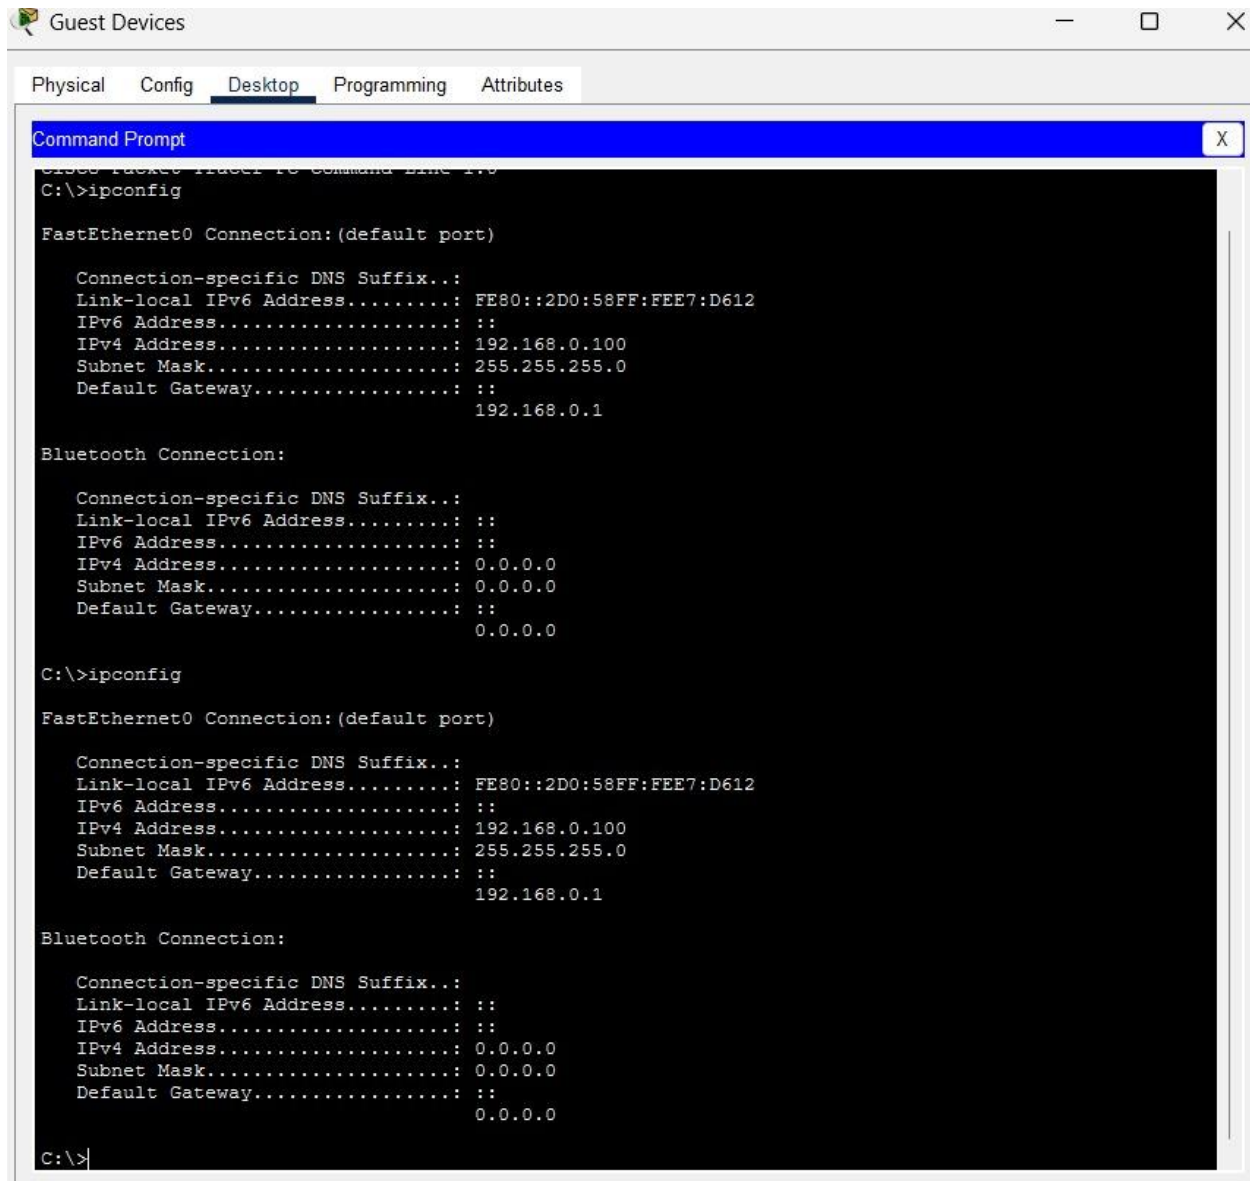

Physical Config CLI Attributes

IOS Command Line Interface

```
SW-CORE-HQ>enable
SW-CORE-HQ#configure terminal
Enter configuration commands, one per line. End with CNTL/Z.
SW-CORE-HQ(config)#interface f0/4
SW-CORE-HQ(config-if)# switchport mode access
SW-CORE-HQ(config-if)# switchport access vlan 50
SW-CORE-HQ(config-if)# no shutdown
SW-CORE-HQ(config-if)# exit
SW-CORE-HQ(config)#end
SW-CORE-HQ#write memory
%SYS-5-CONFIG_I: Configured from console by console

Building configuration...
[OK]
SW-CORE-HQ#show interfaces f0/4 switchport
Name: Fa0/4
Switchport: Enabled
Administrative Mode: static access
Operational Mode: static access
Administrative Trunking Encapsulation: dot1q
Operational Trunking Encapsulation: native
Negotiation of Trunking: Off
Access Mode VLAN: 50 (GUEST)
Trunking Native Mode VLAN: 1 (default)
Voice VLAN: none
Administrative private-vlan host-association: none
Administrative private-vlan mapping: none
Administrative private-vlan trunk native VLAN: none
Administrative private-vlan trunk encapsulation: dot1q
Administrative private-vlan trunk normal VLANs: none
Administrative private-vlan trunk private VLANs: none
Operational private-vlan: none
Trunking VLANs Enabled: 10,20,30,40,50,60
Pruning VLANs Enabled: 2-1001
Capture Mode Disabled
Capture VLANs Allowed: ALL
Protected: false
--More-- %SPANTREE-2-RECV_PVID_ERR: Received 802.1Q BPDU on non trunk FastEthernet0/4 VLAN1.

%SPANTREE-2-BLOCK_PVID_LOCAL: Blocking FastEthernet0/4 on VLAN0001. Inconsistent port type.
```

Copy

Paste

Physical Config CLI Attributes

IOS Command Line Interface

```
%SYS-5-CONFIG_I: Configured from console by console

% Unknown command or computer name, or unable to find computer address

R1-HQ#show ip route static
S* 0.0.0.0/0 [1/0] via 10.51.100.2

R1-HQ#enable
R1-HQ#configure terminal
Enter configuration commands, one per line. End with CNTL/Z.
R1-HQ(config)#ip access-list extended CR4-SERVER-ACCESS
R1-HQ(config-ext-nacl)# permit ip 10.51.10.0 0.0.0.255 10.51.40.0 0.0.0.255
R1-HQ(config-ext-nacl)# permit ip 10.51.40.0 0.0.0.255 10.51.40.0 0.0.0.255
R1-HQ(config-ext-nacl)# deny ip any 10.51.40.0 0.0.0.255
R1-HQ(config-ext-nacl)# permit ip any any
R1-HQ(config-ext-nacl)#exit
R1-HQ(config)#interface g0/0.40
R1-HQ(config-subif)# ip access-group CR4-SERVER-ACCESS in
R1-HQ(config-subif)#exit
R1-HQ(config)#end
R1-HQ#write memory
%SYS-5-CONFIG_I: Configured from console by console

Building configuration...
[OK]
R1-HQ#enable
R1-HQ#configure terminal
Enter configuration commands, one per line. End with CNTL/Z.
R1-HQ(config)#ip access-list extended LEGACY-BLOCK
R1-HQ(config-ext-nacl)# deny ip 10.51.60.0 0.0.0.255 10.51.40.0 0.0.0.255
R1-HQ(config-ext-nacl)# deny ip 10.51.60.0 0.0.0.255 10.51.10.0 0.0.0.255
R1-HQ(config-ext-nacl)# permit ip any any
R1-HQ(config-ext-nacl)#exit
R1-HQ(config)#interface g0/0.10
R1-HQ(config-subif)# ip access-group LEGACY-BLOCK in
R1-HQ(config-subif)#exit
R1-HQ(config)#end
R1-HQ#write memory
%SYS-5-CONFIG_I: Configured from console by console

Building configuration...
[OK]
R1-HQ#
```

Copy

Paste

SW1-CORE L3 Distribution Switch

Physical Config CLI Attributes

IOS Command Line Interface

```
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/1, changed state to up
%LINK-3-UPDOWN: Interface FastEthernet0/1, changed state to down
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/1, changed state to down
%LINK-5-CHANGED: Interface FastEthernet0/1, changed state to up
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/1, changed state to up
Gig0/1      10,20,30,40,50,60

SW-CORE-HQ>how interfaces f0/4 switchport
^
% Invalid input detected at '^' marker.

SW-CORE-HQ>show interfaces f0/4 switchport
Name: Fa0/4
Switchport: Enabled
Administrative Mode: trunk
Operational Mode: trunk
Administrative Trunking Encapsulation: dot1q
Operational Trunking Encapsulation: dot1q
Negotiation of Trunking: On
Access Mode VLAN: 1 (default)
Trunking Native Mode VLAN: 1 (default)
Voice VLAN: none
Administrative private-vlan host-association: none
Administrative private-vlan mapping: none
Administrative private-vlan trunk native VLAN: none
Administrative private-vlan trunk encapsulation: dot1q
Administrative private-vlan trunk normal VLANs: none
Administrative private-vlan trunk private VLANs: none
Operational private-vlan: none
Trunking VLANs Enabled: 10,20,30,40,50,60
Pruning VLANs Enabled: 2-1001
Capture Mode Disabled
Capture VLANs Allowed: ALL
Protected: false
--More--
```

Copy Paste

☐ Top

Physical Config **Desktop** Programming Attributes

Command Prompt

```
Ping statistics for 10.51.40.10:
    Packets: Sent = 4, Received = 0, Lost = 4 (100% loss),

C:\>ping 10.51.40.10

Pinging 10.51.40.10 with 32 bytes of data:

Reply from 10.51.40.10: bytes=32 time<1ms TTL=126
Reply from 10.51.40.10: bytes=32 time<1ms TTL=126
Reply from 10.51.40.10: bytes=32 time=8ms TTL=126
Reply from 10.51.40.10: bytes=32 time<1ms TTL=126

Ping statistics for 10.51.40.10:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 8ms, Average = 2ms

C:\>ping 10.51.10.10

Pinging 10.51.10.10 with 32 bytes of data:

Reply from 10.51.10.10: bytes=32 time<1ms TTL=126
Reply from 10.51.10.10: bytes=32 time<1ms TTL=126
Reply from 10.51.10.10: bytes=32 time=4ms TTL=126
Reply from 10.51.10.10: bytes=32 time=1ms TTL=126

Ping statistics for 10.51.10.10:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 4ms, Average = 1ms

C:\>ping 10.51.20.10

Pinging 10.51.20.10 with 32 bytes of data:

Reply from 10.51.20.10: bytes=32 time<1ms TTL=127
Reply from 10.51.20.10: bytes=32 time<1ms TTL=127
Reply from 10.51.20.10: bytes=32 time=1ms TTL=127
Reply from 10.51.20.10: bytes=32 time<1ms TTL=127

Ping statistics for 10.51.20.10:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 1ms, Average = 0ms

C:\>
```

Physical Config Desktop Programming Attributes

Command Prompt

Pinging 10.51.10.1 with 32 bytes of data:

Request timed out.
Request timed out.
Request timed out.
Request timed out.

Ping statistics for 10.51.10.1:

Packets: Sent = 4, Received = 0, Lost = 4 (100% loss),

C:\>ping 10.51.10.1

Pinging 10.51.10.1 with 32 bytes of data:

Reply from 10.51.10.1: bytes=32 time=30ms TTL=255
Reply from 10.51.10.1: bytes=32 time<1ms TTL=255
Reply from 10.51.10.1: bytes=32 time=1ms TTL=255
Reply from 10.51.10.1: bytes=32 time<1ms TTL=255

Ping statistics for 10.51.10.1:

Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),

Approximate round trip times in milli-seconds:

Minimum = 0ms, Maximum = 30ms, Average = 7ms

C:\>ping 10.51.20.10

Pinging 10.51.20.10 with 32 bytes of data:

Reply from 10.51.20.10: bytes=32 time<1ms TTL=126
Reply from 10.51.20.10: bytes=32 time=4ms TTL=126
Reply from 10.51.20.10: bytes=32 time<1ms TTL=126
Reply from 10.51.20.10: bytes=32 time<1ms TTL=126

Ping statistics for 10.51.20.10:

Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),

Approximate round trip times in milli-seconds:

Minimum = 0ms, Maximum = 4ms, Average = 1ms

C:\>ping 10.51.100.2

Pinging 10.51.100.2 with 32 bytes of data:

Request timed out.
Request timed out.
Request timed out.

Physical Config Desktop Programming Attributes

Command Prompt

X

```
Link-local IPv6 Address . . . . . : FE80::208:1011:1E11:3D88
IPv6 Address . . . . . : ::
IPv4 Address . . . . . : 10.51.30.10
Subnet Mask . . . . . : 255.255.255.0
Default Gateway . . . . . : ::
                        10.51.30.1
```

Bluetooth Connection:

```
Connection-specific DNS Suffix...:
Link-local IPv6 Address . . . . . : ::
IPv6 Address . . . . . : ::
IPv4 Address . . . . . : 0.0.0.0
Subnet Mask . . . . . : 0.0.0.0
Default Gateway . . . . . : ::
                        0.0.0.0
```

C:\>ping 10.51.30.1

Pinging 10.51.30.1 with 32 bytes of data:

```
Reply from 10.51.30.1: bytes=32 time<1ms TTL=255
Reply from 10.51.30.1: bytes=32 time<1ms TTL=255
Reply from 10.51.30.1: bytes=32 time<1ms TTL=255
Reply from 10.51.30.1: bytes=32 time=1ms TTL=255
```

Ping statistics for 10.51.30.1:

```
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 1ms, Average = 0ms
```

C:\>ping 10.51.40.10

Pinging 10.51.40.10 with 32 bytes of data:

```
Reply from 10.51.40.10: bytes=32 time=16ms TTL=127
Reply from 10.51.40.10: bytes=32 time<1ms TTL=127
Reply from 10.51.40.10: bytes=32 time<1ms TTL=127
Reply from 10.51.40.10: bytes=32 time<1ms TTL=127
```

Ping statistics for 10.51.40.10:

```
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 16ms, Average = 4ms
```

C:\>|

Physical Config **Desktop** Programming Attributes

Command Prompt

```
IPv4 Address.....: 10.51.20.10
Subnet Mask.....: 255.255.255.0
Default Gateway.....: ::
                    10.51.20.1
```

Bluetooth Connection:

```
Connection-specific DNS Suffix...:
Link-local IPv6 Address.....: ::
IPv6 Address.....: ::
IPv4 Address.....: 0.0.0.0
Subnet Mask.....: 0.0.0.0
Default Gateway.....: ::
                    0.0.0.0
```

```
C:\>ping 10.51.20.1
```

```
Pinging 10.51.20.1 with 32 bytes of data:
```

```
Request timed out.
Request timed out.
Request timed out.
Request timed out.
```

```
Ping statistics for 10.51.20.1:
```

```
Packets: Sent = 4, Received = 0, Lost = 4 (100% loss),
```

```
C:\>ping 10.51.20.1
```

```
Pinging 10.51.20.1 with 32 bytes of data:
```

```
Request timed out.
Request timed out.
Request timed out.
Request timed out.
```

```
Ping statistics for 10.51.20.1:
```

```
Packets: Sent = 4, Received = 0, Lost = 4 (100% loss),
```

```
C:\>ping 10.51.20.1
```

```
Pinging 10.51.20.1 with 32 bytes of data:
```

```
Request timed out.
```

 Admin PCs

—

□

×

PhysicalConfigDesktopProgrammingAttributes

Command Prompt

X

```
Subnet Mask.....: 0.0.0.0
Default Gateway.....: ::
                    0.0.0.0

C:\>ping 10.51.10.1

Pinging 10.51.10.1 with 32 bytes of data:

Request timed out.
Request timed out.
Request timed out.
Request timed out.

Ping statistics for 10.51.10.1:
    Packets: Sent = 4, Received = 0, Lost = 4 (100% loss),

C:\>ping 10.51.10.1

Pinging 10.51.10.1 with 32 bytes of data:

Reply from 10.51.10.1: bytes=32 time=30ms TTL=255
Reply from 10.51.10.1: bytes=32 time<1ms TTL=255
Reply from 10.51.10.1: bytes=32 time=1ms TTL=255
Reply from 10.51.10.1: bytes=32 time<1ms TTL=255

Ping statistics for 10.51.10.1:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 30ms, Average = 7ms

C:\>ping 10.51.20.10

Pinging 10.51.20.10 with 32 bytes of data:

Reply from 10.51.20.10: bytes=32 time<1ms TTL=126
Reply from 10.51.20.10: bytes=32 time=4ms TTL=126
Reply from 10.51.20.10: bytes=32 time<1ms TTL=126
Reply from 10.51.20.10: bytes=32 time<1ms TTL=126

Ping statistics for 10.51.20.10:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 4ms, Average = 1ms

C:\>
```

☐ Top

Physical Config CLI Attributes

IOS Command Line Interface

```
GigabitEthernet0/0.20
GigabitEthernet0/0.60
Routing Information Sources:
  Gateway          Distance      Last Update
  1.1.1.1           110          00:01:52
  2.2.2.2           110          00:01:52
Distance: (default is 110)

R2-STUDIO#show ip ospf neighbor

Neighbor ID      Pri   State           Dead Time   Address        Interface
1.1.1.1          1    FULL/BDR        00:00:34    10.51.200.1    GigabitEthernet0/1

R2-STUDIO#show ip route ospf
  10.0.0.0/8 is variably subnetted, 10 subnets, 3 masks
O       10.51.10.0 [110/2] via 10.51.200.1, 00:01:53, GigabitEthernet0/1
O       10.51.30.0 [110/2] via 10.51.200.1, 00:01:53, GigabitEthernet0/1
O       10.51.40.0 [110/2] via 10.51.200.1, 00:01:53, GigabitEthernet0/1
O       10.51.50.0 [110/2] via 10.51.200.1, 00:01:53, GigabitEthernet0/1

R2-STUDIO#show ip protocols

Routing Protocol is "ospf 1"
  Outgoing update filter list for all interfaces is not set
  Incoming update filter list for all interfaces is not set
  Router ID 2.2.2.2
  Number of areas in this router is 1. 1 normal 0 stub 0 nssa
  Maximum path: 4
  Routing for Networks:
    10.51.20.0 0.0.0.255 area 0
    10.51.60.0 0.0.0.255 area 0
    10.51.200.0 0.0.0.3 area 0
  Passive Interface(s):
    GigabitEthernet0/0.20
    GigabitEthernet0/0.60
  Routing Information Sources:
    Gateway          Distance      Last Update
    1.1.1.1           110          00:02:00
    2.2.2.2           110          00:02:00
  Distance: (default is 110)

R2-STUDIO#
```

Copy

Paste

☐ Top

Physical Config Desktop Programming Attributes

Command Prompt



```
Request timed out.
Request timed out.

Ping statistics for 10.51.20.1:
    Packets: Sent = 4, Received = 0, Lost = 4 (100% loss),

C:\>ping 10.51.20.1

Pinging 10.51.20.1 with 32 bytes of data:

Request timed out.
Request timed out.
Request timed out.
Request timed out.

Ping statistics for 10.51.20.1:
    Packets: Sent = 4, Received = 0, Lost = 4 (100% loss),

C:\>ping 10.51.20.1

Pinging 10.51.20.1 with 32 bytes of data:

Request timed out.
Request timed out.
Request timed out.
Request timed out.

Ping statistics for 10.51.20.1:
    Packets: Sent = 4, Received = 0, Lost = 4 (100% loss),

C:\>ping 10.51.20.1

Pinging 10.51.20.1 with 32 bytes of data:

Reply from 10.51.20.1: bytes=32 time<1ms TTL=255
Reply from 10.51.20.1: bytes=32 time<1ms TTL=255
Reply from 10.51.20.1: bytes=32 time<1ms TTL=255
Reply from 10.51.20.1: bytes=32 time<1ms TTL=255

Ping statistics for 10.51.20.1:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 0ms, Average = 0ms

C:\>
```

Physical Config Desktop Programming Attributes

Command Prompt

```
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 10.51.20.1

Pinging 10.51.20.1 with 32 bytes of data:

Request timed out.
Request timed out.
Request timed out.
Request timed out.

Ping statistics for 10.51.20.1:
    Packets: Sent = 4, Received = 0, Lost = 4 (100% loss),

C:\>ipconfig

FastEthernet0 Connection:(default port)

    Connection-specific DNS Suffix...:
    Link-local IPv6 Address.....: FE80::2D0:D3FF:FEEB:A832
    IPv6 Address.....: ::
    IPv4 Address.....: 10.51.20.10
    Subnet Mask.....: 255.255.255.0
    Default Gateway.....: ::
                           10.51.20.1

Bluetooth Connection:

    Connection-specific DNS Suffix...:
    Link-local IPv6 Address.....: ::
    IPv6 Address.....: ::
    IPv4 Address.....: 0.0.0.0
    Subnet Mask.....: 0.0.0.0
    Default Gateway.....: ::
                           0.0.0.0

C:\>ping 10.51.20.1

Pinging 10.51.20.1 with 32 bytes of data:

Request timed out.
Request timed out.
Request timed out.
|
```

Physical Config Services Desktop Programming Attributes

Command Prompt

```
Request timed out.
Request timed out.

Ping statistics for 10.51.40.1:
    Packets: Sent = 4, Received = 0, Lost = 4 (100% loss),

C:\>ipconfig

FastEthernet0 Connection: (default port)

    Connection-specific DNS Suffix...:
    Link-local IPv6 Address . . . . .: FE80::2E0:A3FF:FEE3:1E75
    IPv6 Address . . . . .: ::
    IPv4 Address . . . . .: 10.51.40.10
    Subnet Mask . . . . .: 255.255.255.0
    Default Gateway . . . . .: ::
                                10.51.40.1

C:\>ping 10.51.20.1

Pinging 10.51.20.1 with 32 bytes of data:

Request timed out.
Request timed out.
Request timed out.
Request timed out.

Ping statistics for 10.51.20.1:
    Packets: Sent = 4, Received = 0, Lost = 4 (100% loss),

C:\>ping 10.51.40.1

Pinging 10.51.40.1 with 32 bytes of data:

Reply from 10.51.40.1: bytes=32 time=1ms TTL=255
Reply from 10.51.40.1: bytes=32 time<1ms TTL=255
Reply from 10.51.40.1: bytes=32 time<1ms TTL=255
Reply from 10.51.40.1: bytes=32 time<1ms TTL=255

Ping statistics for 10.51.40.1:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 1ms, Average = 0ms

C:\>
```

Admin PCs

Physical Config Desktop Programming Attributes

Command Prompt

```
Bluetooth Connection:

Connection-specific DNS Suffix...:
Link-local IPv6 Address . . . . .: ::
IPv6 Address . . . . .: ::
IPv4 Address . . . . .: 0.0.0.0
Subnet Mask . . . . .: 0.0.0.0
Default Gateway . . . . .: ::
                        0.0.0.0

C:\>ipconfig

FastEthernet0 Connection: (default port)

Connection-specific DNS Suffix...:
Link-local IPv6 Address . . . . .: FE80::20B:BEFF:FEED:4482
IPv6 Address . . . . .: ::
IPv4 Address . . . . .: 10.51.10.10
Subnet Mask . . . . .: 255.255.255.0
Default Gateway . . . . .: ::
                        10.51.10.1

Bluetooth Connection:

Connection-specific DNS Suffix...:
Link-local IPv6 Address . . . . .: ::|
IPv6 Address . . . . .: ::
IPv4 Address . . . . .: 0.0.0.0
Subnet Mask . . . . .: 0.0.0.0
Default Gateway . . . . .: ::
                        0.0.0.0

C:\>ping 10.51.10.1

Pinging 10.51.10.1 with 32 bytes of data:

Request timed out.
Request timed out.
Request timed out.
Request timed out.

Ping statistics for 10.51.10.1:
    Packets: Sent = 4, Received = 0, Lost = 4 (100% loss),

C:\>
```

☐ Top

Editing Workstations

Physical Config **Desktop** Programming Attributes

Command Prompt

```
Request timed out.
Request timed out.
Request timed out.
Request timed out.

Ping statistics for 10.51.30.1:
    Packets: Sent = 4, Received = 0, Lost = 4 (100% loss),

C:\>ipconfig

FastEthernet0 Connection: (default port)

    Connection-specific DNS Suffix...:
    Link-local IPv6 Address . . . . .: FE80::20A:F3FF:FEA4:3D86
    IPv6 Address . . . . .: ::
    IPv4 Address . . . . .: 10.51.30.10
    Subnet Mask . . . . .: 255.255.255.0
    Default Gateway . . . . .: ::
                                10.51.30.1

Bluetooth Connection:

    Connection-specific DNS Suffix...:
    Link-local IPv6 Address . . . . .: ::
    IPv6 Address . . . . .: ::
    IPv4 Address . . . . .: 0.0.0.0
    Subnet Mask . . . . .: 0.0.0.0
    Default Gateway . . . . .: ::
                                0.0.0.0

C:\>ping 10.51.30.1

Pinging 10.51.30.1 with 32 bytes of data:

Reply from 10.51.30.1: bytes=32 time<1ms TTL=255
Reply from 10.51.30.1: bytes=32 time<1ms TTL=255
Reply from 10.51.30.1: bytes=32 time<1ms TTL=255
Reply from 10.51.30.1: bytes=32 time=1ms TTL=255

Ping statistics for 10.51.30.1:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 1ms, Average = 0ms

C:\>
```

☐ Top

Physical Config Desktop Programming Attributes

Command Prompt

```
Connection-specific DNS Suffix...:
Link-local IPv6 Address.....: ::
IPv6 Address.....: ::
IPv4 Address.....: 0.0.0.0
Subnet Mask.....: 0.0.0.0
Default Gateway.....: ::
                        0.0.0.0

C:\>ipconfig

FastEthernet0 Connection: (default port)

    Connection-specific DNS Suffix...:
    Link-local IPv6 Address.....: FE80::20B:BEFF:FEED:4482
    IPv6 Address.....: ::
    IPv4 Address.....: 10.51.10.10
    Subnet Mask.....: 255.255.255.0
    Default Gateway.....: ::
                        10.51.10.1

Bluetooth Connection:

    Connection-specific DNS Suffix...:
    Link-local IPv6 Address.....: ::
    IPv6 Address.....: ::
    IPv4 Address.....: 0.0.0.0
    Subnet Mask.....: 0.0.0.0
    Default Gateway.....: ::
                        0.0.0.0

C:\>ping 10.51.10.1

Pinging 10.51.10.1 with 32 bytes of data:

Request timed out.
Request timed out.
Request timed out.
Request timed out.

Ping statistics for 10.51.10.1:
    Packets: Sent = 4, Received = 0, Lost = 4 (100% loss),

C:\>ping 10.51.10.1

Pinging 10.51.10.1 with 32 bytes of data:

Reply from 10.51.10.1: bytes=32 time=30ms TTL=255
Reply from 10.51.10.1: bytes=32 time<1ms TTL=255
Reply from 10.51.10.1: bytes=32 time=1ms TTL=255
Reply from 10.51.10.1: bytes=32 time<1ms TTL=255

Ping statistics for 10.51.10.1:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 30ms, Average = 7ms

C:\>
```

Physical Config **Desktop** Programming Attributes

Command Prompt

```
Connection-specific DNS Suffix...:
Link-local IPv6 Address . . . . .: FE80::20B:BEFF:FEED:4482
IPv6 Address . . . . .: ::
IPv4 Address . . . . .: 10.51.10.10
Subnet Mask . . . . .: 255.255.255.0
Default Gateway . . . . .: ::
                          10.51.10.1
```

Bluetooth Connection:

```
Connection-specific DNS Suffix...:
Link-local IPv6 Address . . . . .: ::
IPv6 Address . . . . .: ::
IPv4 Address . . . . .: 0.0.0.0
Subnet Mask . . . . .: 0.0.0.0
Default Gateway . . . . .: ::
                          0.0.0.0
```

C:\>ping 10.51.10.1

Pinging 10.51.10.1 with 32 bytes of data:

```
Request timed out.
Request timed out.
Request timed out.
Request timed out.
```

Ping statistics for 10.51.10.1:

Packets: Sent = 4, Received = 0, Lost = 4 (100% loss),

C:\>ping 10.51.10.1

Pinging 10.51.10.1 with 32 bytes of data:

```
Reply from 10.51.10.1: bytes=32 time=30ms TTL=255
Reply from 10.51.10.1: bytes=32 time<1ms TTL=255
Reply from 10.51.10.1: bytes=32 time=1ms TTL=255
Reply from 10.51.10.1: bytes=32 time<1ms TTL=255
```

Ping statistics for 10.51.10.1:

Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),

Approximate round trip times in milli-seconds:

Minimum = 0ms, Maximum = 30ms, Average = 7ms

C:\>

```
SW-LEGACY#show port-security interface f0/2
Port Security           : Enabled
Port Status             : Secure-up
Violation Mode          : Shutdown
Aging Time              : 0 mins
Aging Type              : Absolute
SecureStatic Address Aging : Disabled
Maximum MAC Addresses   : 1
Total MAC Addresses     : 0
Configured MAC Addresses : 0
Sticky MAC Addresses    : 0
Last Source Address:Vlan : 0000.0000.0000:0
Security Violation Count : 0
```

```
SW-LEGACY#show port-security interface f0/2
Port Security           : Enabled
Port Status             : Secure-up
Violation Mode          : Shutdown
Aging Time              : 0 mins
Aging Type              : Absolute
SecureStatic Address Aging : Disabled
Maximum MAC Addresses   : 1
Total MAC Addresses     : 0
Configured MAC Addresses : 0
Sticky MAC Addresses    : 0
Last Source Address:Vlan : 0000.0000.0000:0
Security Violation Count : 0
```

```
SW-LEGACY#show port-security interface f0/2
Port Security           : Enabled
Port Status             : Secure-up
Violation Mode          : Shutdown
Aging Time              : 0 mins
Aging Type              : Absolute
SecureStatic Address Aging : Disabled
Maximum MAC Addresses   : 1
Total MAC Addresses     : 1
Configured MAC Addresses : 0
Sticky MAC Addresses    : 1
Last Source Address:Vlan : 0009.7C99.D7E0:60
Security Violation Count : 0
```

```
SW-LEGACY#
```