


- HOUSING-PBT POLYESTER UL94V-0  
MIXED GLASS FIBER,  
STANDARD COLOR-BLACK
- CONTACTS-0.35mm THICK PHOS-BRONZE  
PLATED WITH HARD GOLD AND  
GOLD FLASH IN SOLDER AREA.
- SHIELD-0.20mm THICK COPPER ALLOY,  
PLATED WITH NICKEL.

CAVITY CONFIRMS TO FCC RULES AND REGULATIONS  
PART 68,SUBPART F.

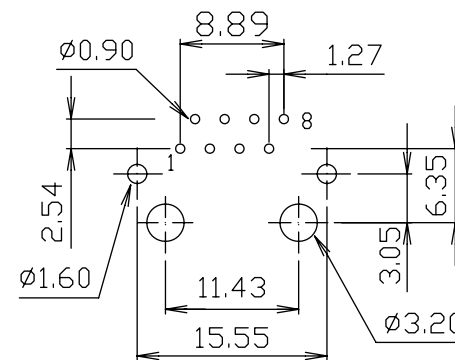

## PC Board Layout

## Ordering Information

|        |                   |          |       |                                    |
|--------|-------------------|----------|-------|------------------------------------|
| AJT75B | A                 | 8        | 1     | X                                  |
| Type   | Positions<br>(10) | Contacts | Ports | Plating<br>$1 = 6u'$<br>$3 = 30u'$ |

**Tolerance**  
unless otherwise specified  
mm  
.0 ± .25  
.00 ± .13  
.000 ± .05



P/N: AJT75BA81X

Desc.: Side entry, thru hole, 10P/8C, shielded PCB jack

Date: 9-22-09

Drawn By: Donna Mears

Dimensions in mm

Verified By: Mike Balekdjian