



本圖面若與目錄之規格尺寸不符，以本圖面規格尺寸為主。
Below is our main specification if different from catalog.

RoHS compliant

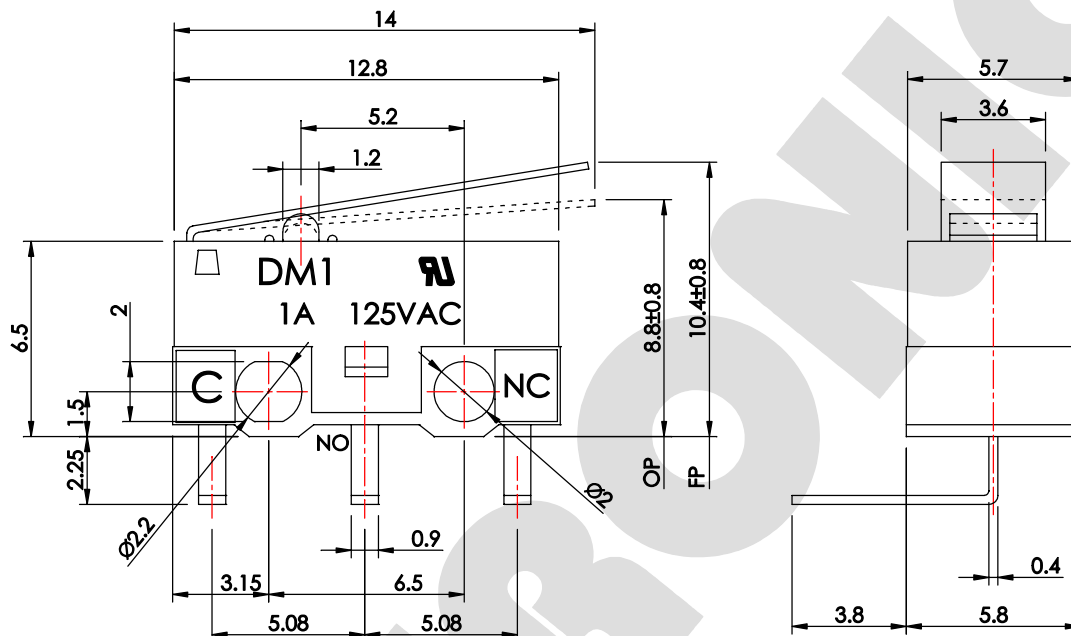

SCHEMATIC



RoHS compliant

DM1-01C-XXG-G

OPERATING FORCE

20, 25, 30, 35, 40

SPECIFICATION

Rating: 1A 125V AC/30mA 5V DC.

Contact resistance: $\leq 50m\Omega$.(initial)

Insulation resistance: $\geq 100M\Omega$ at 500V DC.(initial)

Withstand voltage: 500V AC for 1 minute.(initial)

Operating temperature: $-25^{\circ}C \sim +65^{\circ}C$.

Ambient humidity: $<85\% RH$.

Operating force: $30\pm 15g$.

Minimum load: 10mA 3.3V DC.(reference only)

Mechanical life: 500,000 Cycles.

Electrical life: 10,000 Cycles.

Soldering temperature: $250^{\circ}C$ Max. for 3 sec.

Soldering time: 1 time only.

Note: Unwashable, don't be immersed by epoxy and organic solvent.



V2.1	△		
V2.0	無	新繪製	2008.01.07
版本 VER.	符號 SYMBOL	修改內容 ALTERATION	更新日期 DATE

產品
PRODUCT

Micro Switch

型號
MODEL NO.

DM1-01C-30G-G

比例
SCALE 4 : 1 單位
UNIT mm

公差
TOLERANCE .X= $\pm 0.3mm$, .XX= $\pm 0.2mm$

製圖
DRAWN BY 核圖
CHECKED BY 主管
APPROVED BY

Danny Chen Alex Lin Margaret Lee

SWITRONIC
INDUSTRIAL CORP.
Switches



一綺電子企業股份有限公司

總公司：110 台北市信義路四段415號13樓之3

13F-3 NO. 415, SEC. 4, HSIN YI ROAD, TAIPEI, TAIWAN

TEL : 886-2-27290229 (Rep.) FAX : 886-2-27582086

URL : <http://www.switronic.com.tw>

E-MAIL : switches@ms36.hinet.net