

FCIF 500 | FCIR 500



Cylinder Heated Ironer

FEATURES

- Finger protection and emergency button for more safety
- Durable Meta Aramid ironing belts for higher temperature resistance
- Automatic cool down
- Indication of ironing speed and temperature
- Frequency controlled motor
- Easy to remove lint filters
- Reverse mode
- Standard anti-static bar (FCIF 500)
- EasyFold system - Requires less

maintenance, no ribbons and rolls

- Front/Rear return selectable (FCIR 500)

OPTIONS

- Chrome-plated cylinder for a better thermal conduction and less maintenance
- Foot pedal with stop & reverse operation
- Rear return with output table (FCIF)

CONTROLS OPTIONS

- MCX- Easy to operate microprocessor with 20 pre-set ironing programmes.



LARGE SURFACE CONTACT WITH LINEN

over an angle of 300° for high ironing capacity




AUTO ADJUSTABLE IRONING SPEED TECHNOLOGY

according to the residual moisture



HIGHLY POLISHED STEEL THIN CYLINDER


Rapid response to temperature, excellent thermal conductivity

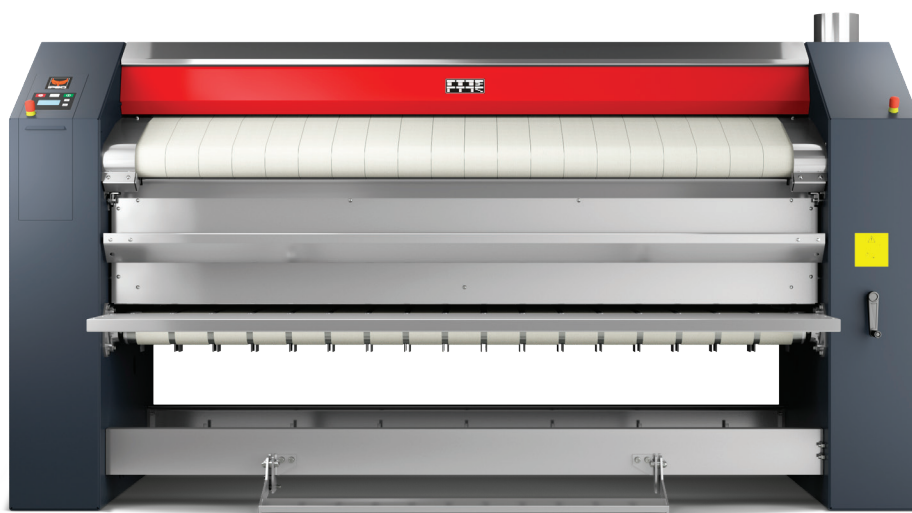


		FCIF2000/500, FCIR2000/500	FCIF2600/500, FCIR2600/500	FCIF3200/500, FCIR3200/500
ROLLER DIAMETER	mm	500	500	500
USEFUL ROLLER LENGTH	mm	2000	2600	3200
HEATING				
Electric heating	kW	38	55	65
Gas heating	kW	36	52	66
Steam heating	kg/h	49	68	88
MOTORS				
Roller motor	kW	0,37	0,37	0,37
Fan motor	kW	0,18/0,255	2x0,18/0,255	2x0,18/0,255
IRONING CAPACITY*				
Electrical & Gas heating	kg/h	80	95	120
Steam heating	kg/h	95	115	145
ROLLER SPEED	m/min.	1,5-8	1,5-8	1,5-8
ELECTRIC CONNECTION				
		380-415V 3AC+N 50/60 Hz, 208-240V 3AC 50/60 Hz 380-415V 3AC-N 50/60 Hz, 440V-480 3AC 60 Hz	380-415V 3AC+N 50/60 Hz, 208-240V 3AC 50/60 Hz 380-415V 3AC-N 50/60 Hz, 440V-480 3AC 60 Hz	380-415V 3AC+N 50/60 Hz, 208-240V 3AC 50/60 Hz 380-415V 3AC-N 50/60 Hz, 440V-480 3AC 60 Hz
DIMENSIONS				
H*W*D	mm	1568x2750x1185	1568x3350x1185	1568x3950x1185
Net weight	kg	1290	1440	1680
TRANSPORT DATA				
Volume (packed)	m ³	7,14	8,62	10,13
Packed H*W*D	mm	1900x2890x1300	1900x3490x1300	1900x4100x1300
Gross weight	kg	1520	1700	2000

* Tested in accordance of ISO 9398-1, The data concerning dimensions of machines include all extended parts


FRONT FCIF/ FCIR

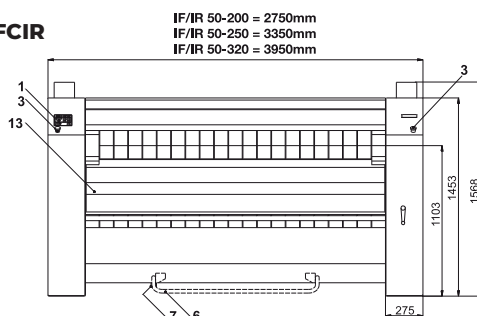


FCIF




TOP FCIF/ FCIR

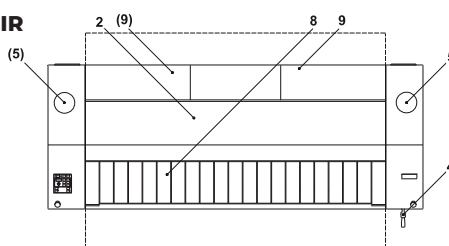


FCIR




BACK FCIF/ FCIR MODEL S

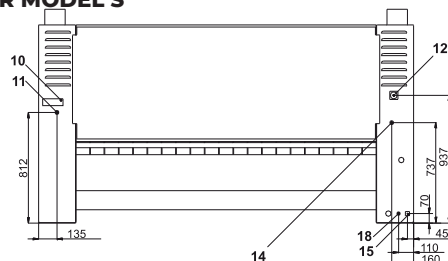

MODEL E



MODEL G



- | | | |
|---|--|--|
| 1. Control panel | 9. Cover of filter sieve | 18. Main supply of electric power |
| 2. Upper cover | 10. Name plate | 19. Gas supply G 3/4" (only for version "G") |
| 3. Centralstop | 11. Condense drain G 3/4" (only for version "S") | 20. Power supply for heating system (only for version "E") |
| 4. Manual drive of roller | 12. Main switch | 21. Output tilting table - rear (according to order) |
| 5. Exhaust ventilation | 13. Upper trough | 22. Output tilting trough - front |
| 6. Pedal used for starting/stopping belts movement (according to order, only for version OPL) | 14. Steam supply G 3/4" (only for version "S") | 23. Output tilting trough - rear |
| 7. Pedal microswitch (according to order, only for version OPL) | 15. External protective connector | |
| 8. Feeding belts/feeding table | 16. Output tilting table - front | |
| | 17. Bolts of side cover | |