

FCI500

# Cylinder Heated Ironer



## FEATURES

- Large surface contact with linen over an angle of 300°
- Finger protection and emergency button for more safety
- Durable Meta Aramid ironing belts
- Automatic cooldown
- Reverse mode possible
- Frequency controlled motor
- Easy-to-remove lint filters
- Space saving installation against the wall is possible: front return
- Electric, gas or steam heating

## OPTIONS

- Coin operated version
- Foot pedal for easy start and stop operation
- Chrome-plated cylinder for a better thermal conduction

## CONTROLS OPTIONS

- Easy-to-operate microprocessor: 20 pre-set ironing programs
- Indication of ironing speed and temperature




**LARGE SURFACE CONTACT WITH LINEN**  
over an angle of 300° for high ironing capacity



**AUTO ADJUSTABLE IRONING SPEED TECHNOLOGY**  
according to the residual moisture



**HIGHLY POLISHED STEEL THIN CYLINDER**  
Rapid response to temperature, excellent thermal conductivity

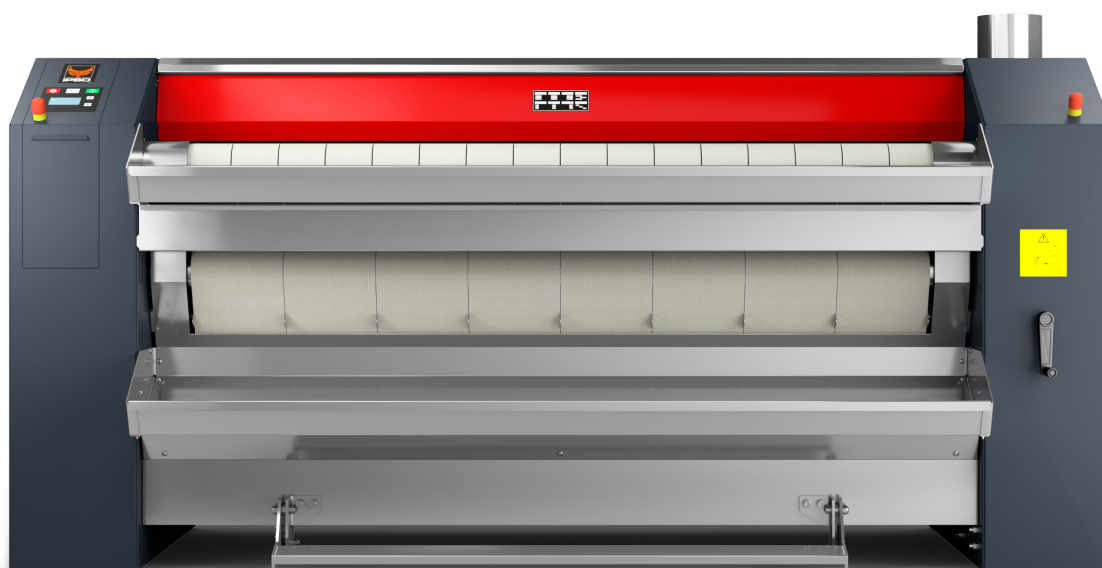

|                          |                | FCI1600/500                                                                                   | FCI2000/500    | FCI2600/500    | FCI3200/500    |
|--------------------------|----------------|-----------------------------------------------------------------------------------------------|----------------|----------------|----------------|
| ROLLER DIAMETER          | mm             | 500                                                                                           | 500            | 500            | 500            |
| USEFUL ROLLER LENGTH     | mm             | 1600                                                                                          | 2000           | 2600           | 3200           |
| HEATING                  |                |                                                                                               |                |                |                |
| Electric                 | kW             | 32,4                                                                                          | 37,2           | 54             | 64,8           |
| Gas                      | kW             | 30                                                                                            | 36             | 52             | 66             |
| Steam                    | kg/h           | 36                                                                                            | 49             | 68             | 88             |
| MOTORS                   |                |                                                                                               |                |                |                |
| Roller                   | kW             | 0,37                                                                                          | 0,37           | 0,37           | 0,37           |
| Fan                      | kW             | 0,18/0,25                                                                                     | 0,18/0,25      | 2×0,18/0,25    | 2×0,18/0,25    |
| TOTAL INSTALLED POWER    |                |                                                                                               |                |                |                |
| Electric                 |                | 33,2                                                                                          | 38             | 55,2           | 66             |
| Gas                      |                | 0,7                                                                                           | 0,7            | 0,9            | 0,9            |
| Steam                    |                | 0,7                                                                                           | 0,7            | 0,9            | 0,9            |
| EXHAUST                  | mm             | 1×150                                                                                         | 1×150          | 2×150          | 2×150          |
| IRONING CAPACITY*        |                |                                                                                               |                |                |                |
| Electrical & Gas heating | kg/h           | 65                                                                                            | 80             | 95             | 120            |
| Steam heating            | kg/h           | 80                                                                                            | 95             | 115            | 145            |
| IRONING SPEED            | m/min.         | 1,5-8                                                                                         | 1,5-8          | 1,5-8          | 1,5-8          |
| ELECTRIC CONNECTION      |                | 380-415V 3AC+N 50/60 Hz, 208-240V 3AC 50/60 Hz<br>380-415V 3AC-N 50/60 Hz, 440V-480 3AC 60 Hz |                |                |                |
| DIMENSIONS               |                |                                                                                               |                |                |                |
| H*W*D                    | mm             | 1232×2350×1052                                                                                | 1232×2750×1052 | 1232×3350×1087 | 1232×3950×1087 |
| Net weight               | kg             | 920                                                                                           | 1150           | 1290           | 1590           |
| TRANSPORT DATA           |                |                                                                                               |                |                |                |
| Volume (crate packed)    | m <sup>3</sup> | 4,24                                                                                          | 4,97           | 6              | 7,03           |
| H*W*D                    | mm             | 1550×2490×1100                                                                                | 1550×2890×1100 | 1550×3490×1100 | 1550×4090×1100 |
| Gross weight             | kg             | 1120                                                                                          | 1350           | 1500           | 1850           |

\* Tested in accordance of ISO 9398-1, The data concerning dimensions of machines include all extended parts

