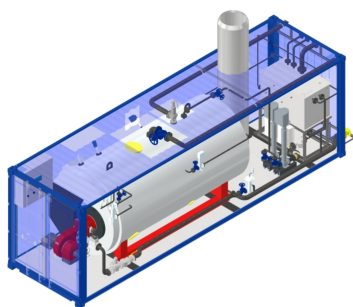



CONTAINERIZED STEAM BOILER PLANT

Steam boiler plant 4000 kg/h

Gas / oil burner · output 4000 kg/h · operating pressure up to 16 barg

MAIN FEATURES

- Dual-fuel burner gas / oil
- Two feedwater pumps
- Chimney
- Flash vessel
- Power & control switchgear
- Condensate tank
- Safety equipment, 72-hour unattended operation

PARAMETERS

Maximum output [kg/h]	4000
Maximum operating pressure [barg]	16

CONNECTIONS

Pump supply	DN 50 PN 16
Gas connection	DN 100 PN 16
Light heating oil supply	1" quick coupling
Light heating oil return	1" quick coupling
Condensate return	DN 40 PN 16
Steam connection	DN 100 PN 16
Feedwater connection (after water treatment)	1" male thread

REQUIRED POWER SUPPLY

Electrical voltage [V]	400
Power [kW]	27
Current protection [A]	63

MAX. FUEL CONSUMPTION

Natural gas [Nm ³ /h]	307
Light heating oil [l/h]	301

TECHNICAL PARAMETERS

Transport dimensions (L × W × H) [mm]	9500 × 2438 × 3200
Operating dimensions with chimney [mm]	9500 × 2438 × 3200
Transport weight [kg]	17 000
Operating weight [kg]	25 500