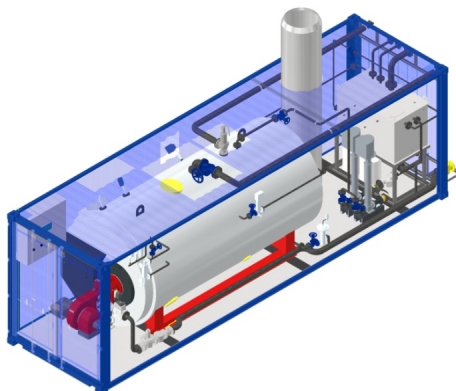


CONTAINERISED STEAM BOILER PLANT

STEAM BOILER PLANT 4000 KG/H

 Gas / oil burner · output 4000 kg/h · working
 pressure up to 16 barg

KEY FEATURES

- ✓ Dual-fuel gas / oil burner
- ✓ Power & control switchgear
- ✓ Two feedwater pumps
- ✓ Condensate tank
- ✓ Chimney
- ✓ Safety fittings for 72 h attended operation
- ✓ Flash vessel

PARAMETERS

Maximum output [kg/h]	4000
Maximum working pressure [barg]	16

CONNECTIONS

Pump supply	DN 50 PN 16
Gas connection	DN 100 PN 16
Light fuel oil supply	1" quick coupler
Light fuel oil return	1" quick coupler
Condensate return	DN 40 PN 16
Steam connection	DN 100 PN 16
Feedwater connection after WTS	1" ext. thread

REQUIRED POWER SUPPLY PARAMETERS

Voltage [V]	400
Power [kW]	27
Circuit protection [A]	63

MAXIMUM FUEL CONSUMPTION

Natural gas [Nm³/h]	307
Light fuel oil [l/h]	301

TECHNICAL PARAMETERS

Transport dimensions (L × W × H) [mm]	9500 × 2438 × 3200
Working dimensions with chimney [mm]	9500 × 2438 × 3200
Transport weight [kg]	17 000
Working weight [kg]	25 500