


G66 详细参数 G66-18


型号	G66-18		
	KV30	KV35	KV70
定子外径 [mm]	66	66	66
转子内径 [mm]	39	39	39
定子轴向长度 [mm]	26	26	26
质量（无框不含壳）(±10%)[g]	241	241	241
驱动电压（典型值）[V]	12-48(48)	12-48(48)	12-48(48)
额定输出功率 (±10%) [W]	150	170	380
额定转矩 (105° C 温升)(±10%) [Nm]	1.16	1.16	1.16
额定转矩 (55° C 温升)(±10%) [Nm]	0.7	0.7	0.7
峰值转矩 (10 秒钟)(±10%) [Nm]	2.8	2.8	2.8
峰值转矩 (2 秒钟) (±10%)[Nm]	4.7	4.7	4.7
RMS 额定电流 (105° C 温升)(±10%) [A]	3 .0	3 .5	7
RMS 额定电流 (55° C 温升) (±10%)[A]	1 .83	2 .91	5 .8
RMS 峰值电流 (10 秒钟)(±10%) [A]	7 .6	12 .1	24 .3
RMS 峰值电流 (2 秒钟)(±10%) [A]	15 .2	24 .3	48 .6
反电动势系数 (±10%)[Vs/rad]	0 .313	0 .25	0 .125
空载转速（典型电压下）[rpm]	1400	1600	3300
转速系数 (±10%)[rpm/V]	30	35	71
转矩系数 (±10%)[Nm/A]	0 .270	0 .234	0 .117
线电阻 (20℃下最大)[Ω]	1 .68	1 .26	0 .316
线电感（以实际为准）[mH]	1 .27	0 .949	0 .237
极数 [定子 N 转子 P]	24N20P	24N20P	24N20P
转动惯量 (±10%) [kg·mm2]	23	23	23
绕组接线方式	星型	三角	星型
时间常数 (±10%)[ms]	0.752	0.752	0.752
电机常数 (±10%)[N·m/ √ (W)]	0.24	0.24	0.24

G66-18-KV30

G66-18-KV30 效率运行图 (25摄氏度)

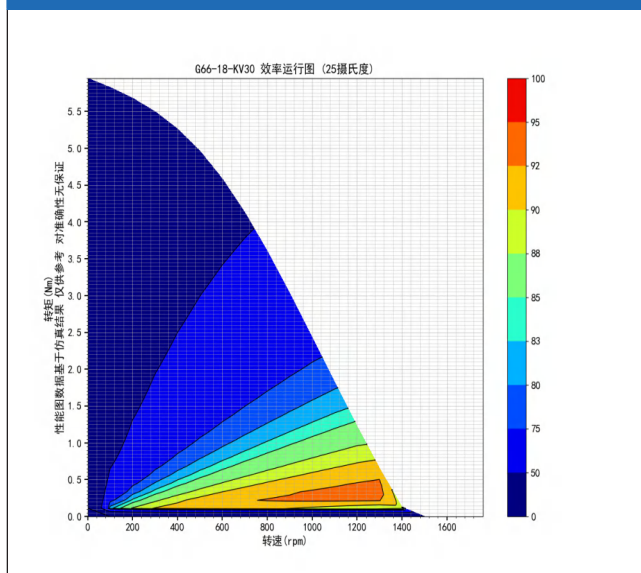


G66-18-KV30 运行性能图 (直流电压48V)

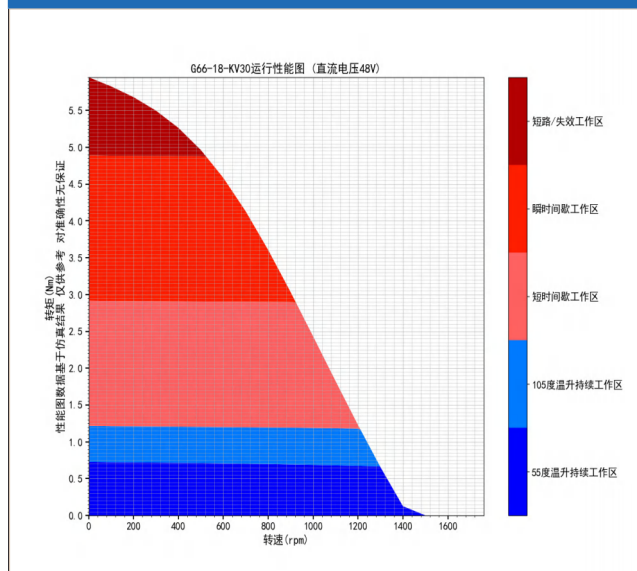


G66-18-KV30

G66-18-KV30 T-NCurve@25C

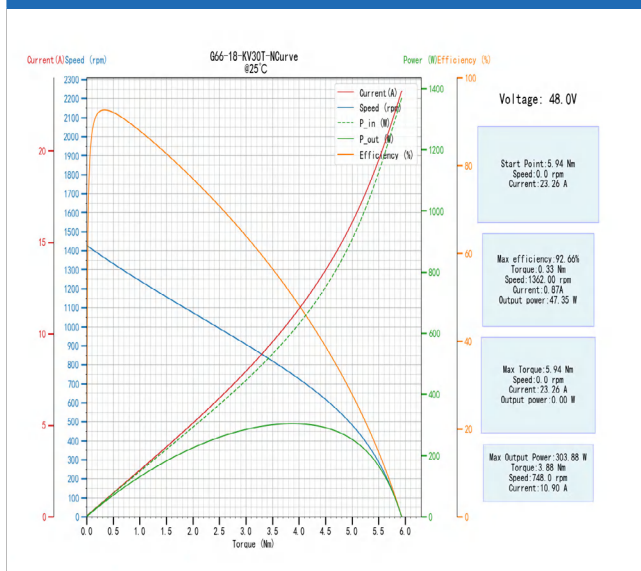


G66-18-KV30 扭矩 - 电流曲线 (T-i 曲线) @25°C

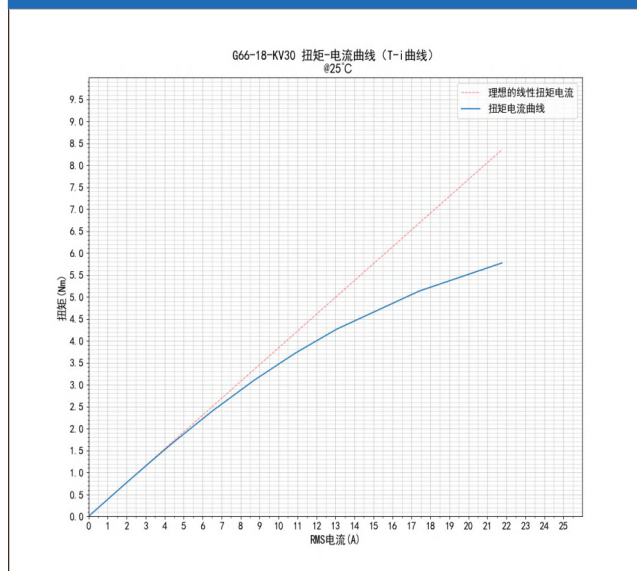


G66-18-KV35

G66-18-KV35 效率运行图 (25摄氏度)

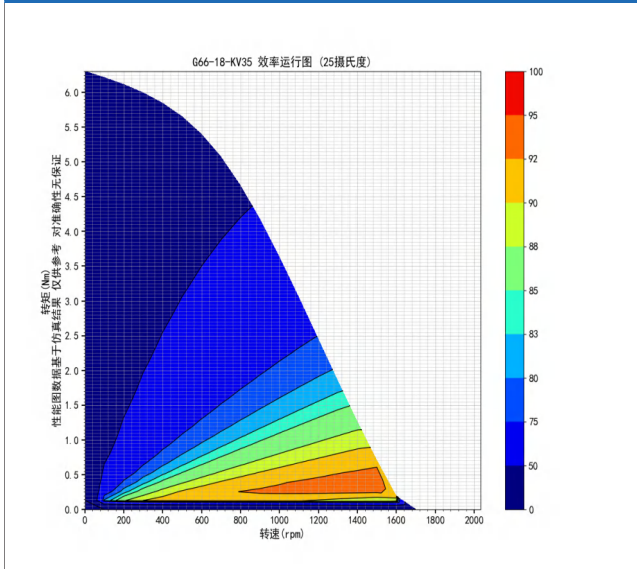


G66-18-KV35 运行性能图 (直流电压48V)

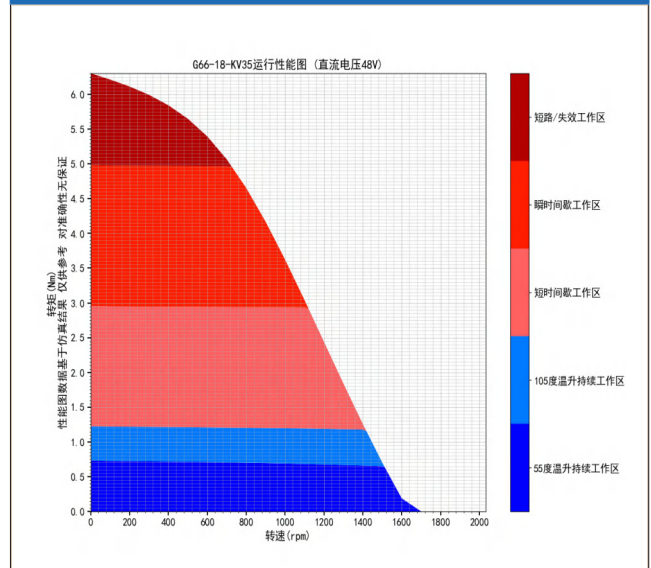


G66-18-KV35

G66-18-KV35 T-NCurve@25C

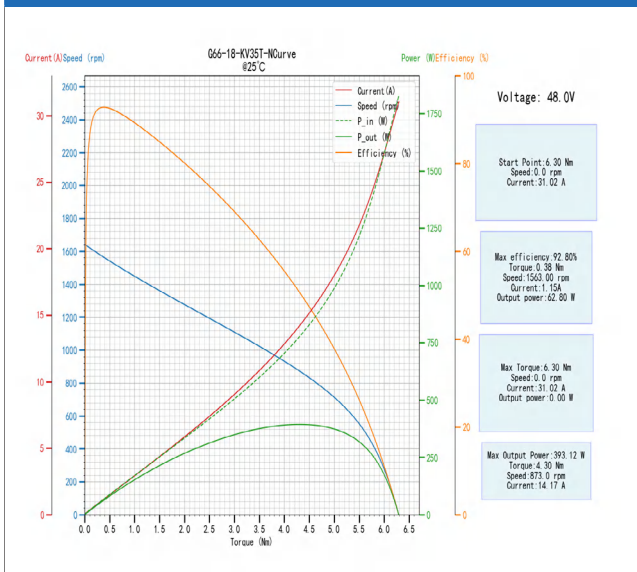


G66-18-KV35 扭矩 - 电流曲线 (T-i 曲线) @25°C

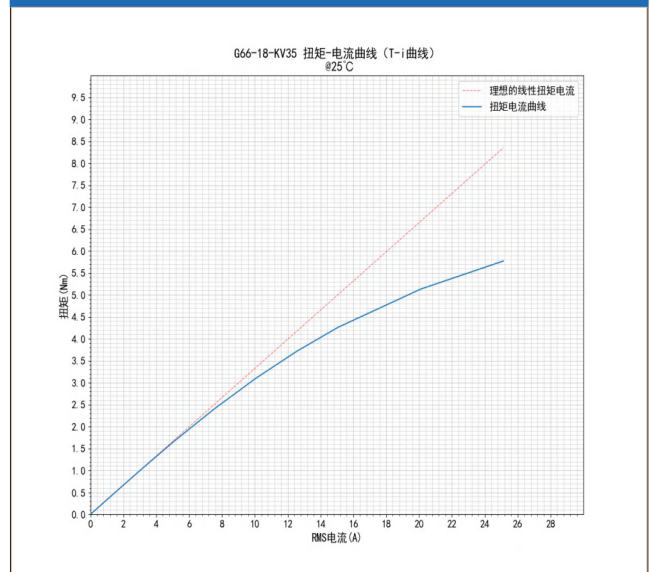


G66-18-KV70

G66-18-KV70 效率运行图 (25摄氏度)

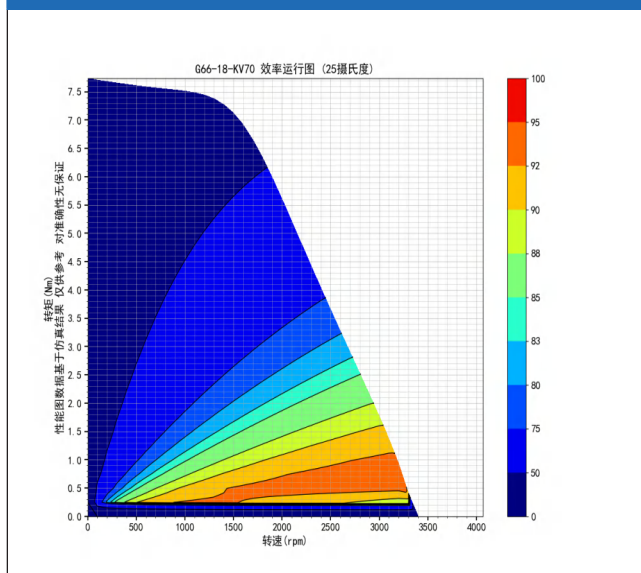


G66-18-KV70 运行性能图 (直流电压48V)

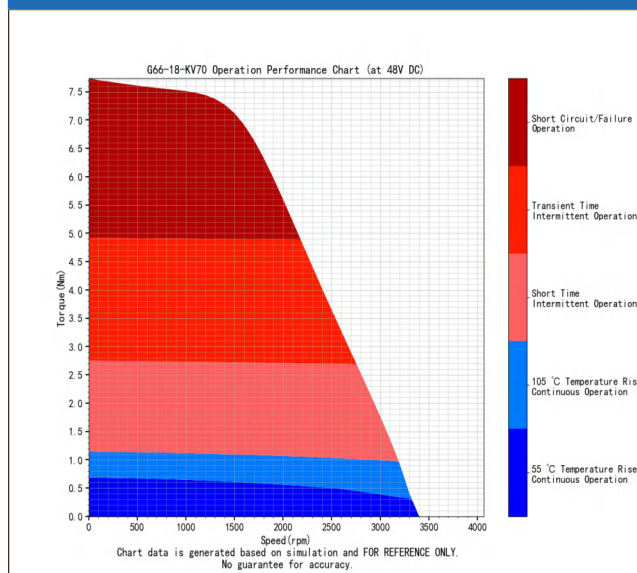

G66-18-KV70

G66-18-KV70 T-NCurve@25C

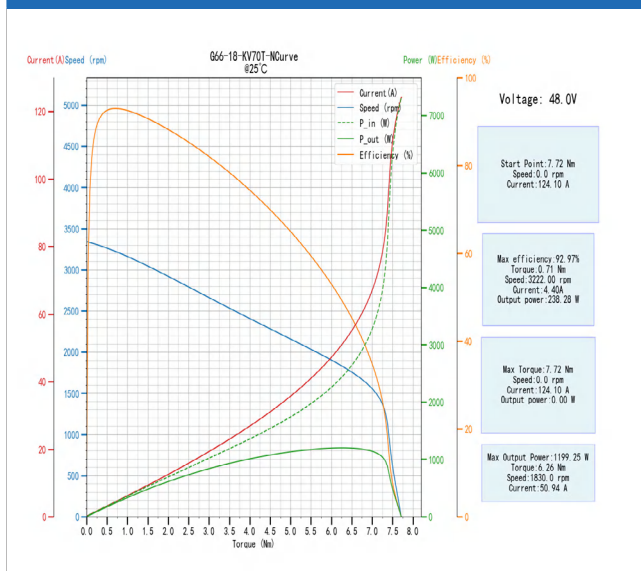

G66-18-KV70 扭矩 - 电流曲线 (T-i 曲线) @25°C

