



Here is a picture of the subflow. You define the input schema on the subflow input node and just make sure to have a subflow output node at the end

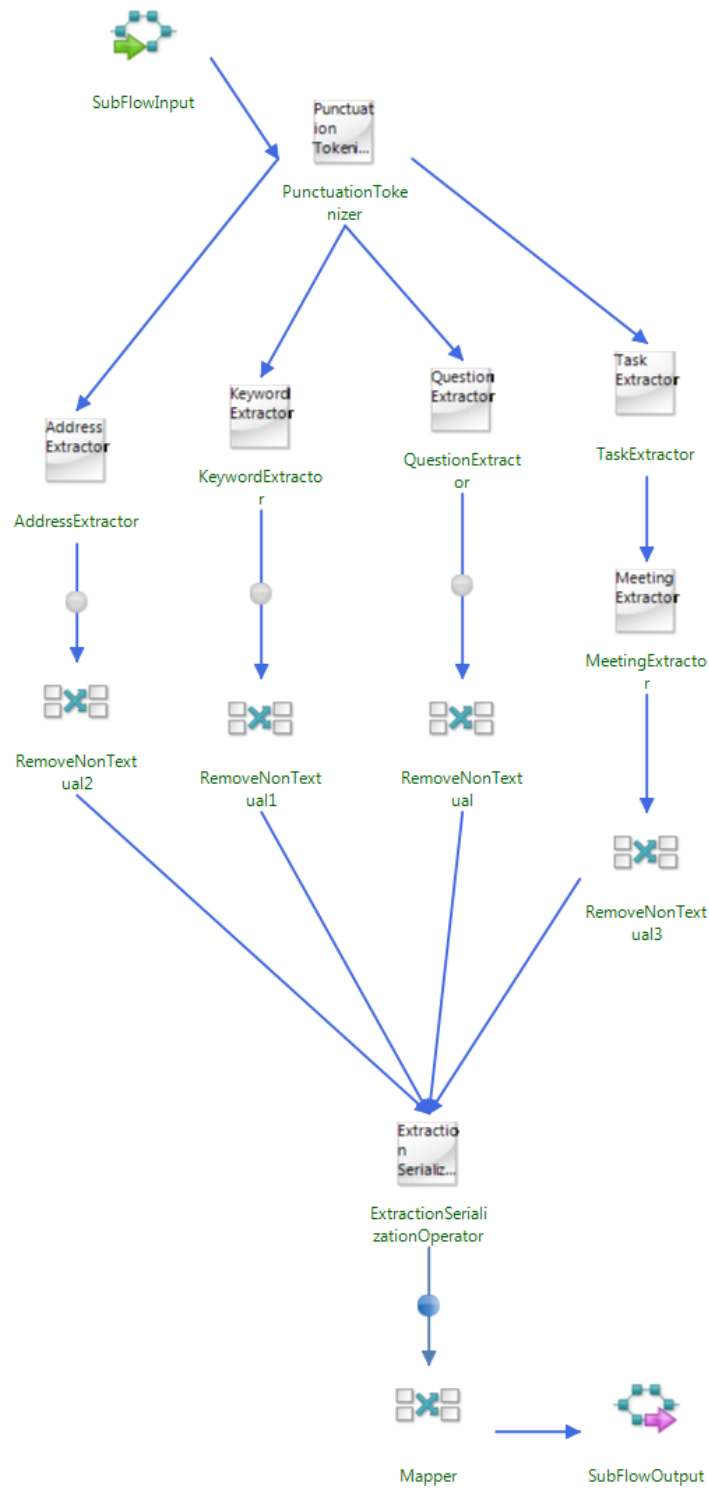

Set up subflow input

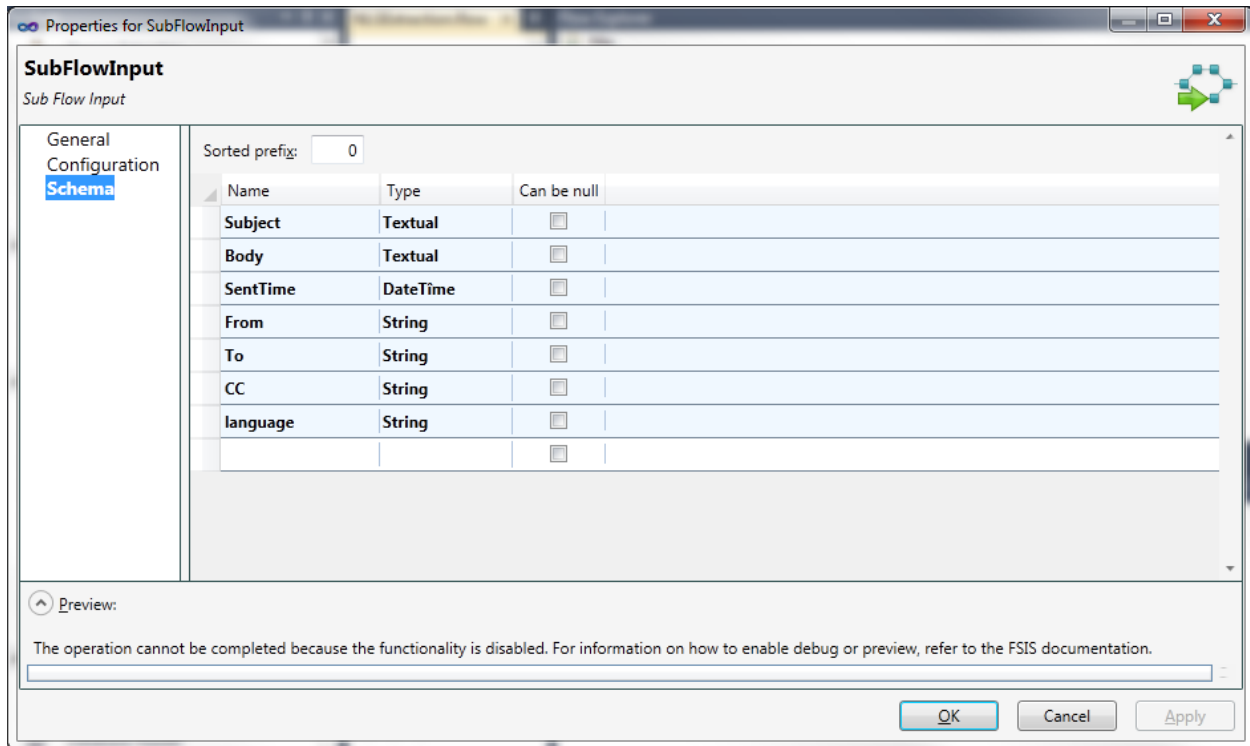

Properties for SubFlowInput

SubFlowInput
Sub Flow Input

General
Configuration
Schema

Sorted prefix: 0

Name	Type	Can be null
Subject	Textual	☐
Body	Textual	☐
SentTime	DateTime	☐
From	String	☐
To	String	☐
CC	String	☐
language	String	☐
		☐

Preview:

The operation cannot be completed because the functionality is disabled. For information on how to enable debug or preview, refer to the FSIS documentation.

OK Cancel Apply

Then in the main flow you create a subflow node and set it up to point at the sub flow you created. You can pick from any flow deployed to the server. I also here have a “flow bypass” mapper which I used to keep fields from my main flow “filename/outputfilename” that the subflow doesn’t consume. These get combined correctly on the other end.

