Mounting penalty at a matched detector operating temperature

Target Tdet = 218.900 K | Maximum actual departure = 0.031 K

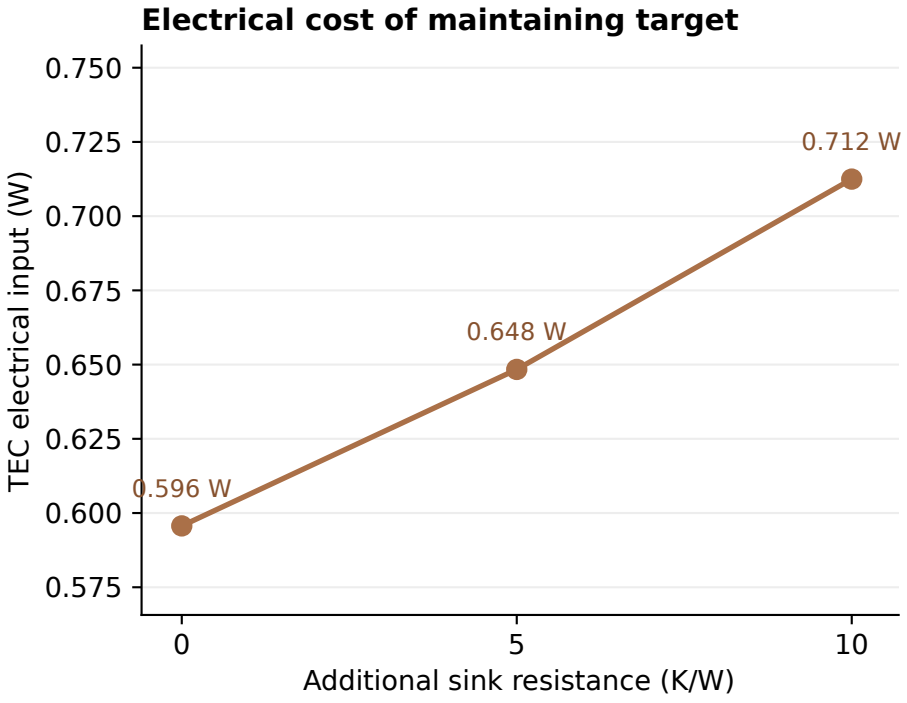

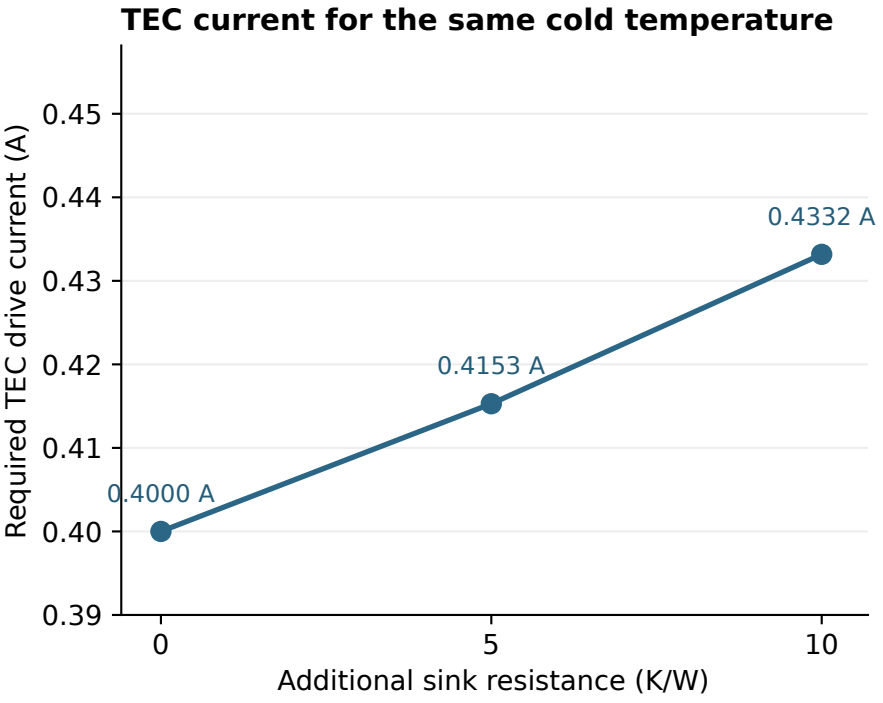

Full 88-leg, four-ceramic 3D and copper-coupled solutions; source Rext 4.833 K/W retained plus stated extra.
Fixed 0.866 V detector bias and assumed optical heat 0.5 mW; provisional P/N and mounting properties.