Gas backfill changes the cooled device temperature

Same source TEC and TO package | 0.400 A TEC | 2.0 mW fixed die heat | 300 K reservoir

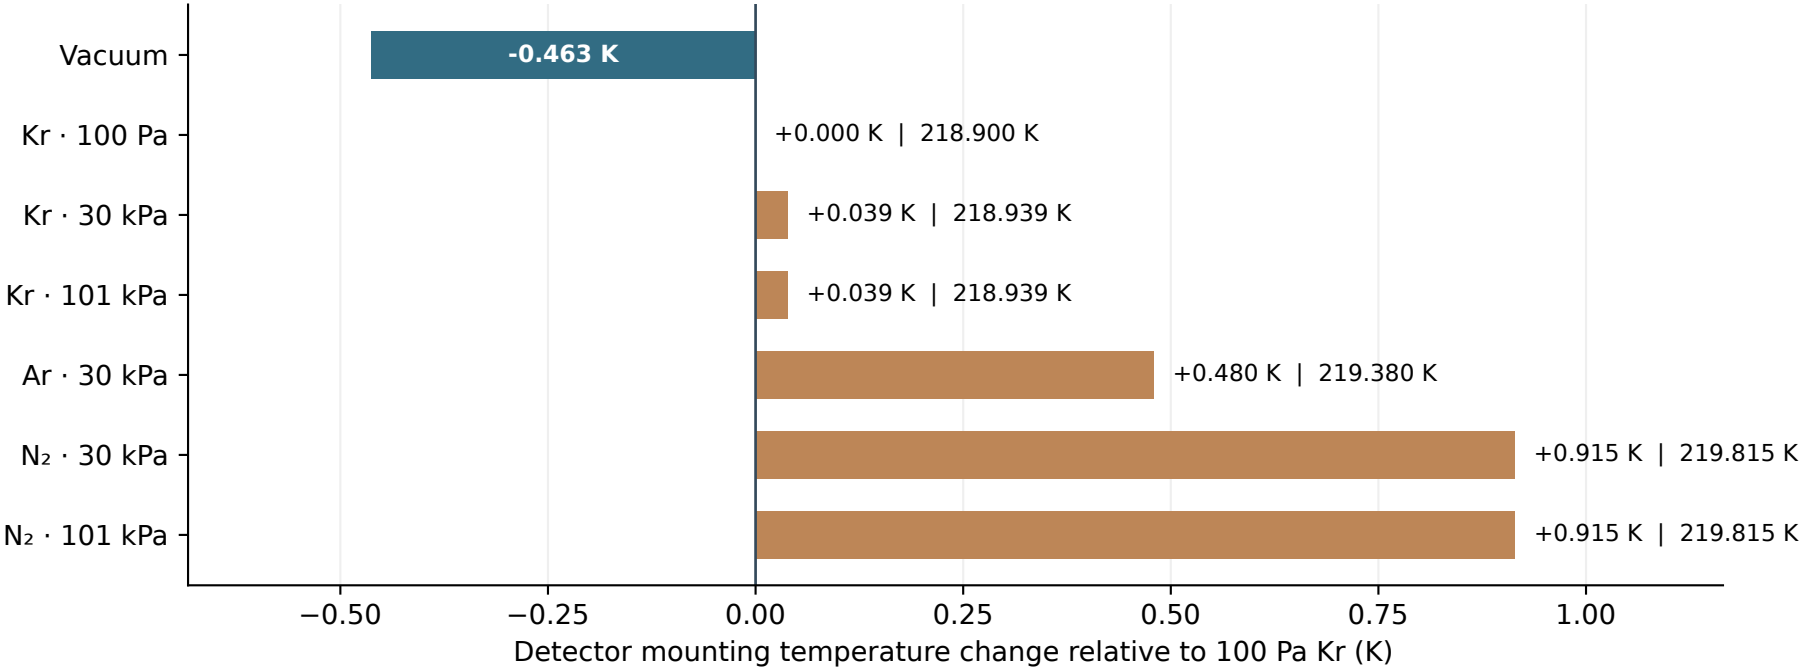

Cavity treatment: four effective gas-surface branches, 3 mm gap and 0.8 accommodation; NOT native gas CFD.
Old Rev3 geometry/results excluded; all plotted points re-solved with the physical 29/11/4-source cooler.