HgCdTe composition changes electrical heat load on the TEC

Unmeasured 400 × 100 × 10 µm bulk channel; acceptors 10^{16} cm^{-3}, $\mu_e/\mu_h = 100$

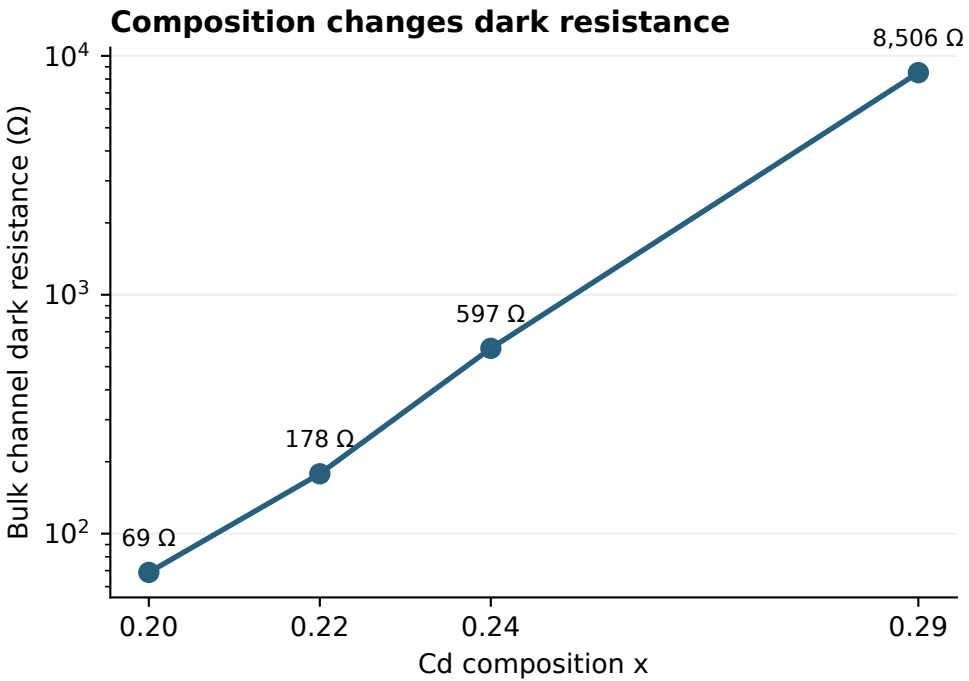

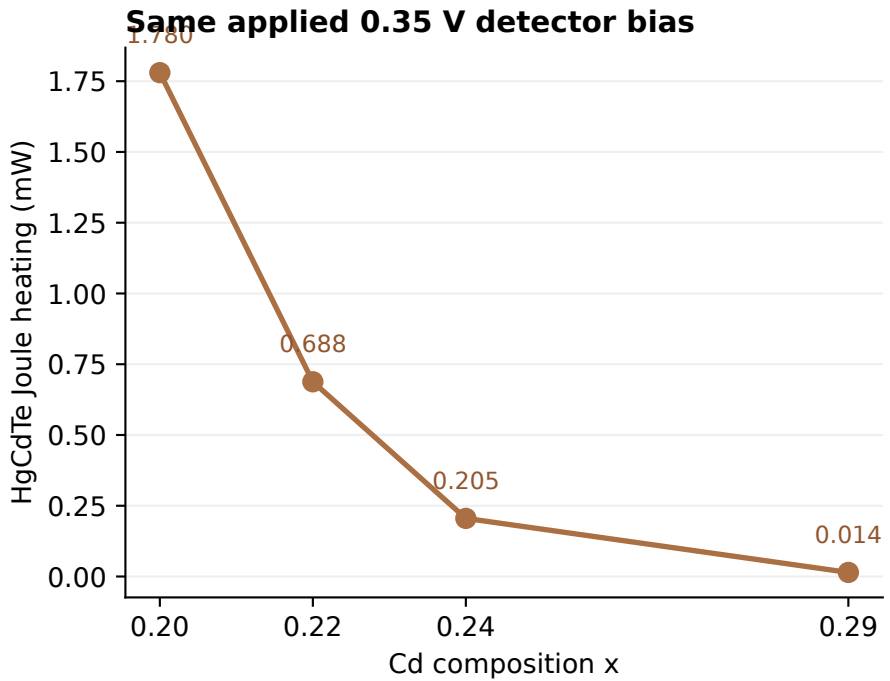

μ_h assumptions: 450 / 450 / 400 / 220 cm²/(V·s) for x = 0.20 / 0.22 / 0.24 / 0.29.

No measured grade, contacts, field-dependent mobility, photoresponse, surface shunts or validated detectivity.