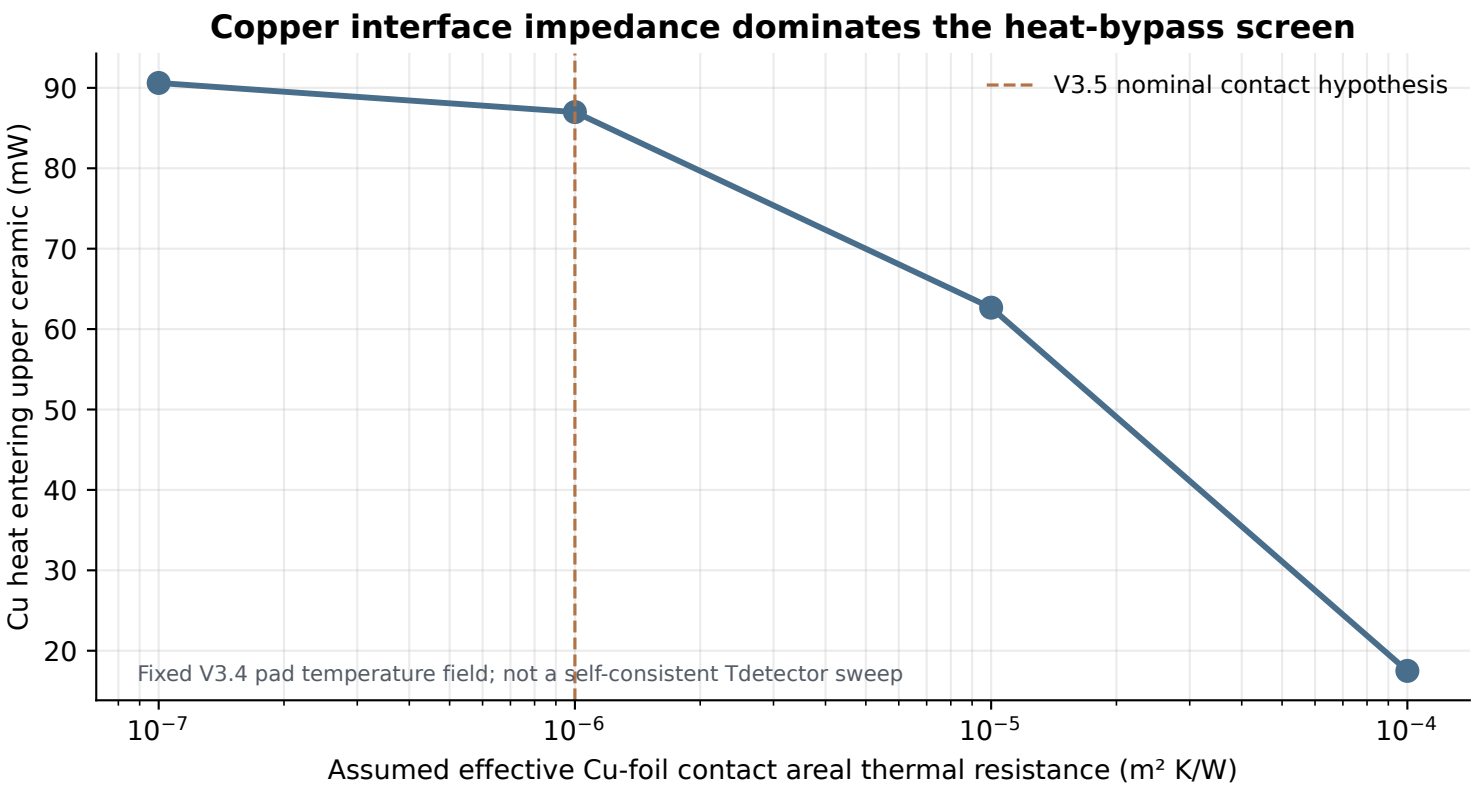
Copper interface impedance dominates the heat-bypass screen
V3.5 nominal contact hypothesis
Cu heat entering upper ceramic (mW)
90
80
70
60
50
40
30
20
Fixed V3.4 pad temperature field; not a self-consistent Tdetector sweep
10^{-7}
10^{-6}
10^{-5}
10^{-4}
Assumed effective Cu-foil contact areal thermal resistance (m² K/W)