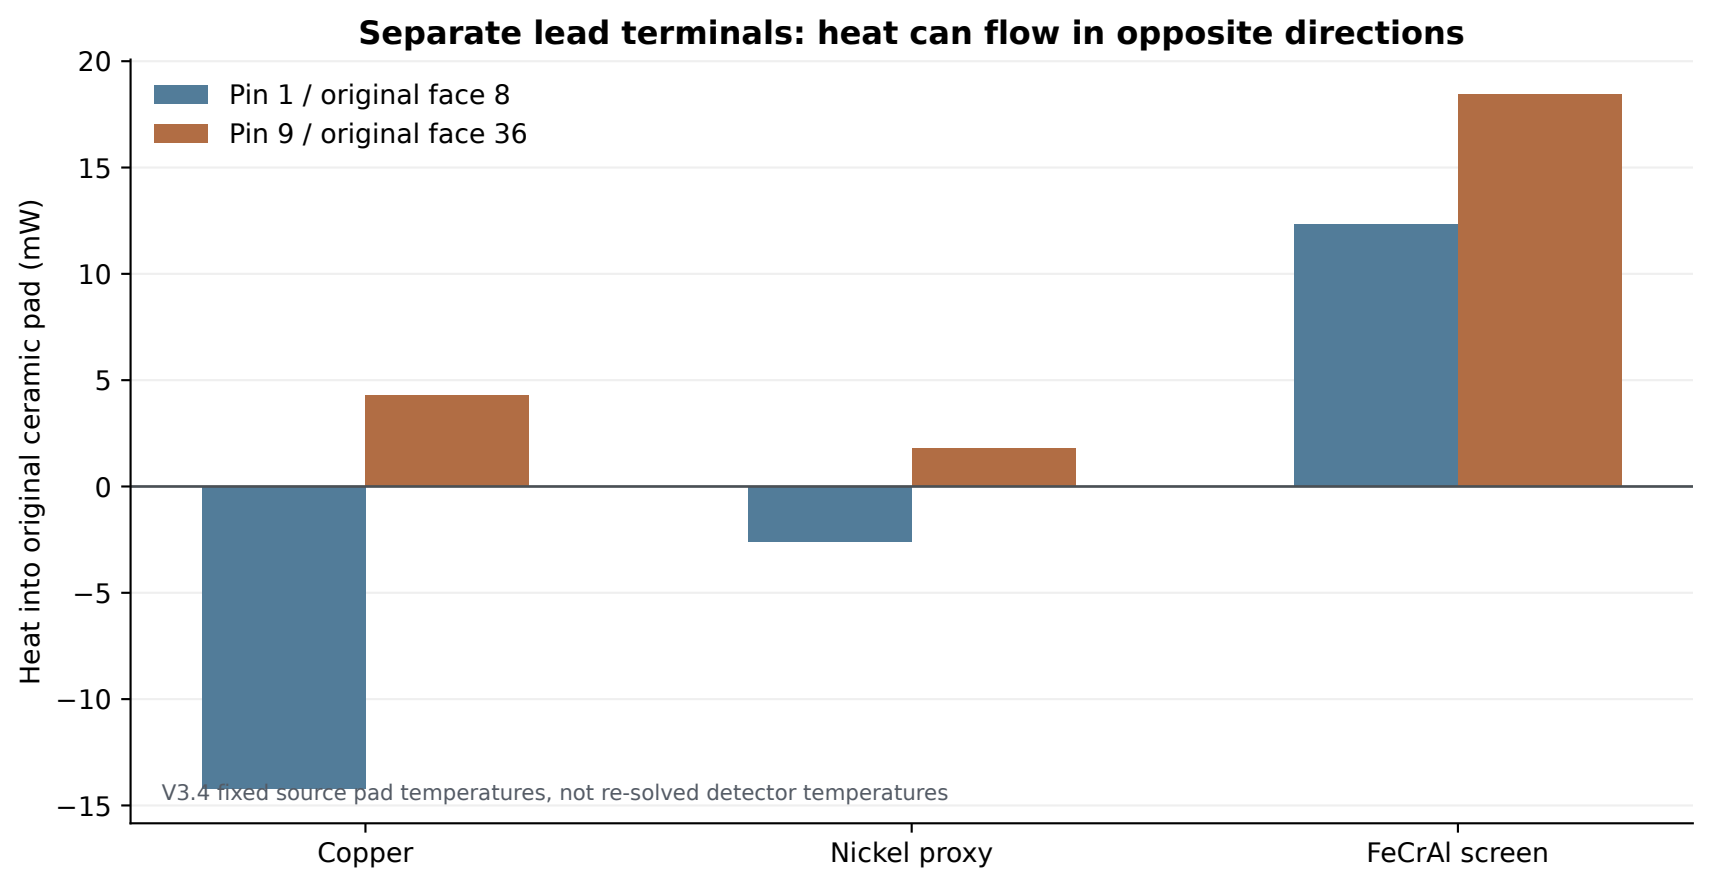
Separate lead terminals: heat can flow in opposite directions
Pin 1 / original face 8
Pin 9 / original face 36
Heat into original ceramic pad (mW)
20
15
10
5
0
−5
−10
−15
V3.4 fixed source pad temperatures, not re-solved detector temperatures
Copper
Nickel proxy
FeCrAl screen