Actual registered route/support coordinates

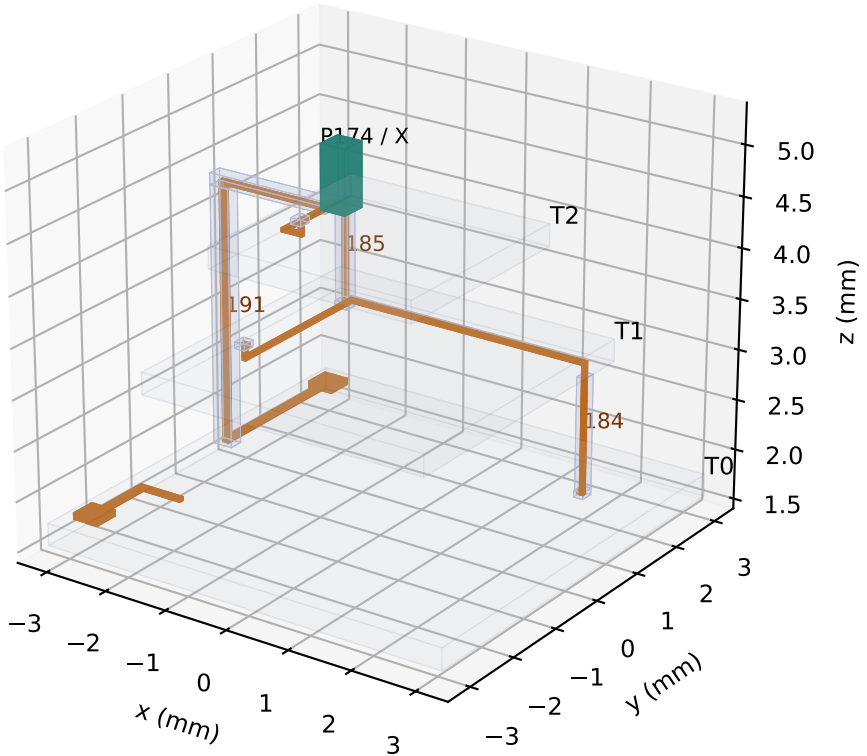

Condensed reciprocal thermal ports
edge conductance (mW/K), 40 µm level

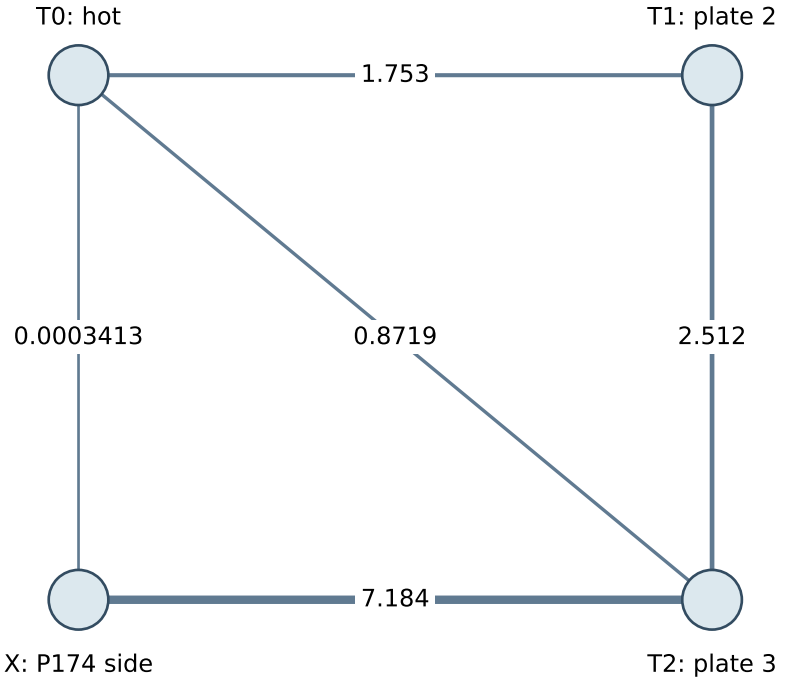

Cu and alumina share distributed interfaces.
X is a side contact, not the cold ceramic.
Isothermal plate/pad ports are an unqualified closure.

Geometry fixture only; plates shown as outlines. Raw support boxes are Cu-cut in the numerical operator.