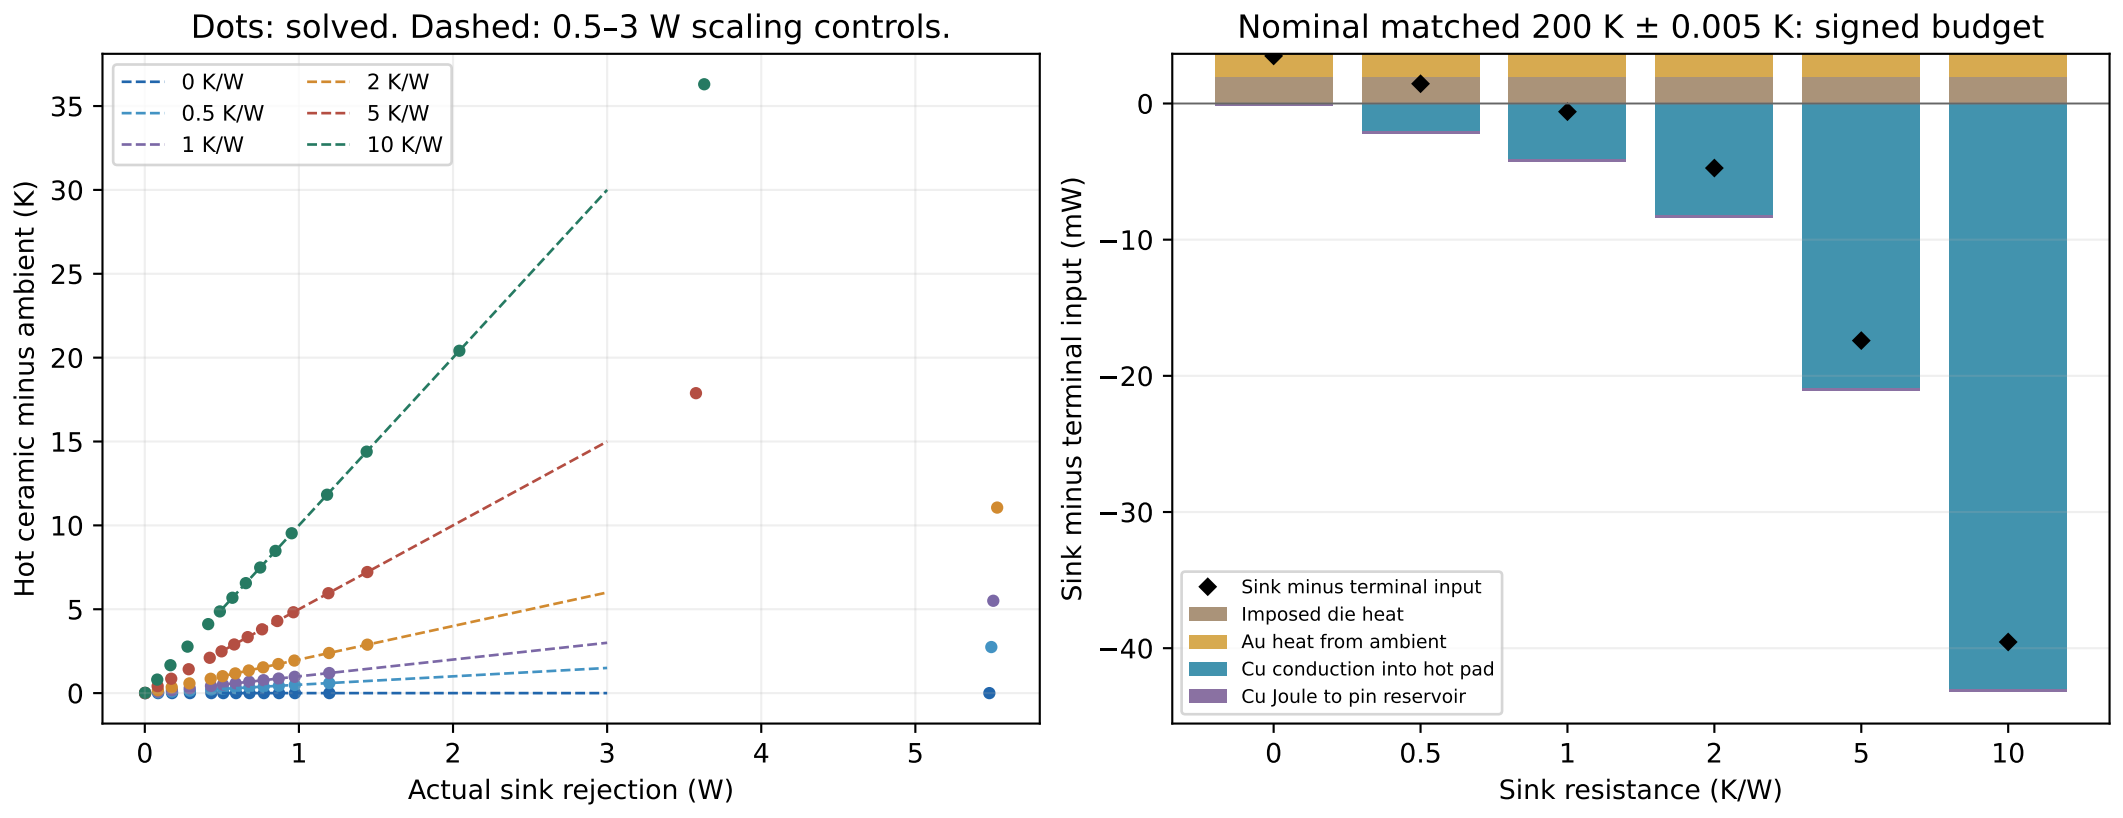
Dots: solved. Dashed: 0.5–3 W scaling controls.
0 K/W
0.5 K/W
1 K/W
2 K/W
5 K/W
10 K/W
Hot ceramic minus ambient (K)
Actual sink rejection (W)
Nominal matched 200 K ± 0.005 K: signed budget
Sink minus terminal input (mW)
Sink resistance (K/W)
Sink minus terminal input
Imposed die heat
Au heat from ambient
Cu conduction into hot pad
Cu Joule to pin reservoir