THERMAL ARCHITECTURE | 3-STAGE TEC + HgCdTe

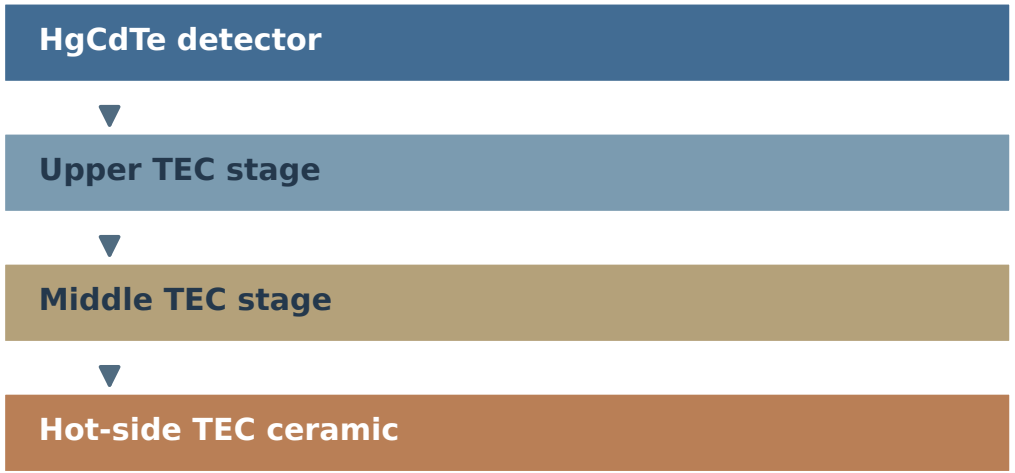

218.90 K

247.36 K

270.53 K

303.76 K

Matched synthetic operating case

TEC drive: 0.400 A

Ambient reservoir: 300 K

Detector heat load: 2.00 mW

Krypton fill: 100 Pa

Calculated detector cooling

81.10 K below reservoir

Schematic not to scale; stage temperatures are saved V3.5 source-model values, not measured hardware data.