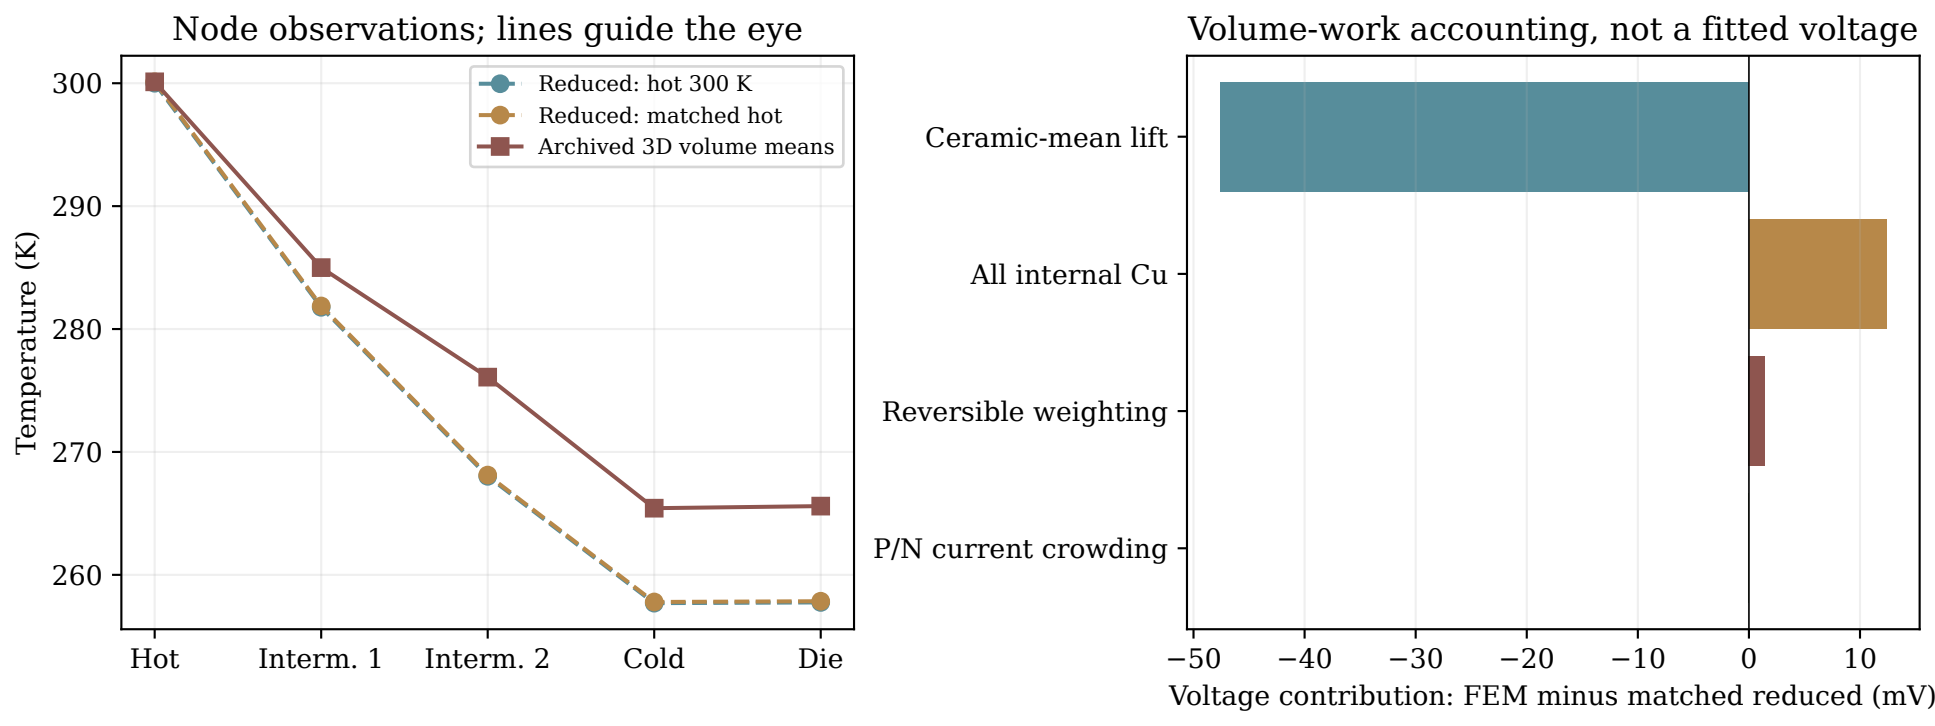
Node observations; lines guide the eye
Temperature (K)
300
290
280
270
260
Hot
Interm. 1
Interm. 2
Cold
Die
Reduced: hot 300 K
Reduced: matched hot
Archived 3D volume means
Volume-work accounting, not a fitted voltage
Ceramic-mean lift
All internal Cu
Reversible weighting
P/N current crowding
−50
−40
−30
−20
−10
0
10
Voltage contribution: FEM minus matched reduced (mV)